


PRODUCT DATA SHEET

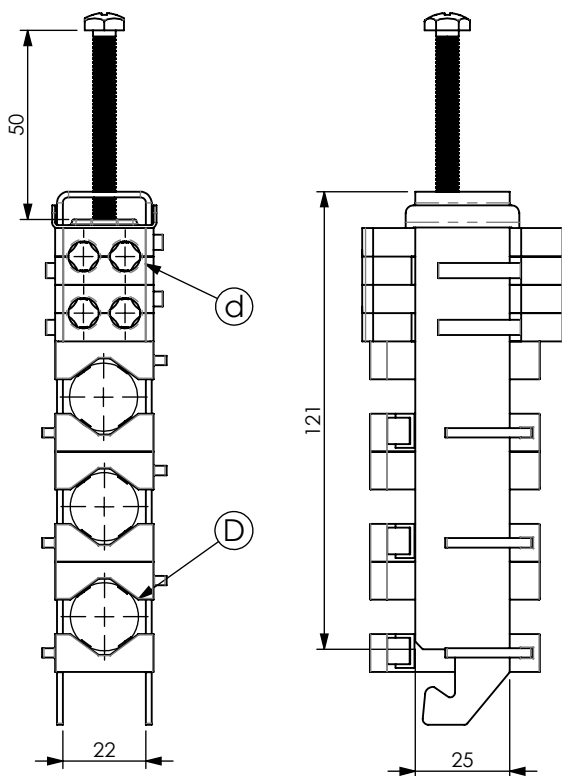

A) SPECIFICATIONS

- 1 Stainless steel bow type "C"
- 2 Self-locking pressure screw M6,
- 3 Stainless steel sliding pressure plate.
- 4 SAT black P.A. fiberglass calibrated double saddles
- 5 SEP black P.A.fiberglass saddles

B) RESISTANCE TESTS


UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

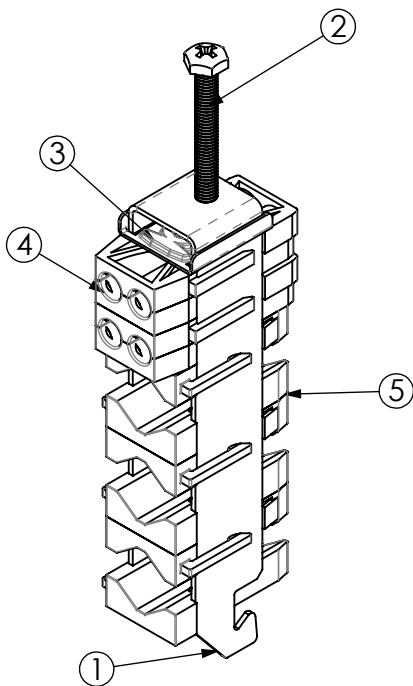

code	6015143308.01
article	OX C/3x22+SAT 2x8/2

	
50	0.1609Kg

RI	DATE	DR	DATE	AP	Description:
02					
01					
00	26/02/21	G.S.	26/02/21	A.V.	
1 ST EMISSION					
					