

FDV

Circle Post 15,4W

El nr	31 030 12
Article nr	651211
EAN	7090015378792



Lysteknikk

Type lyskilde	COB LED (CREE)
Spenning	230VAC 50/60Hz
Watt	14W
Systemeffekt (W)	15,4W
Effektiv lysstrøm (lm)	568lm
Effekt	36,8lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<5
Levetid	80000h L80 (IEC62717 Ta25)
Lysspredning	52°



Dimmetype

Type	Ikke Dimbar
------	-------------

Beskyttelse

Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP54
IP-grad (driver)	IP44

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Antrasit

Energi og godkjenning

Energiklasse	A
Godkjenning	CE
Safety standard	EN 61347-2-13:2006, EN 61347-1:2008+A1+A2, EN 62384:2006+A1

Montering/Tilkobling

Montering	Utendørs
Kabling	skruesklemme


Dimensjoner (mm)

Lengde (L)	
Høyde (H)	800 mm
Bredde (W)	Ø120 mm
Vekt	3,00 kgs

Forpakning

Eske dimensjon	145x145x835 mm
Eske Vekt	3,10 kgs
Kartong Dimensjon	305x305x850 mm
Antall/Kartong	4 stk
Kartong Vekt	12,50 kgs

Circle Post

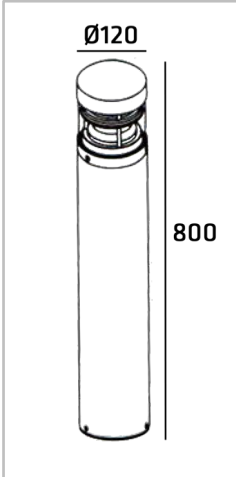

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor and outdoor use.

MAIN PARAMETER:

Product	651204	651211
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED watt	14W	14W
System eff	15,4W	15,4W
LED	CREE COB LED	CREE COB LED
LED Driver	Constant Current 350mA	Constant Current 350mA
Color Temperature	3000K	3000K
Protection	Class I	Class I
Beam Angle	52°	52°
IP Rated	IP54	IP54
Operation Temperature	-40°C <ta<50°C	-40°C <ta<50°C
Product Size	Ø120mmxH800mm	Ø120mmxH800mm

INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.




Art nr. 651204/651211

INSTALLATION STEPS:

1. Provide a power supply to the luminaire using a suitable cable. Connect the Mains supply to the luminaire.

- Mains supply **LIVE (Brown) - L**
- Mains supply **NEUTRAL (Blue) - N**
- Mains supply **EARTH (Yellow/Green) - E**

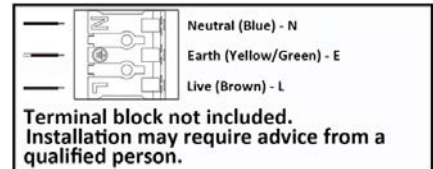

IMPORTANT: These luminaries are Class I and must be earthed.

