


# RADIM RF 1CH WALLSWITCH


100-240V 50/60Hz 3V [1xCR2430 battery] IP20

## INTRODUCTION

**IMPORTANT:** Read all the instructions prior to installation

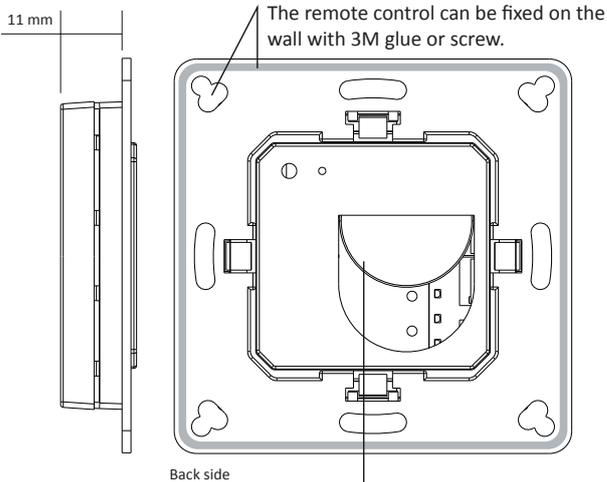

Back side

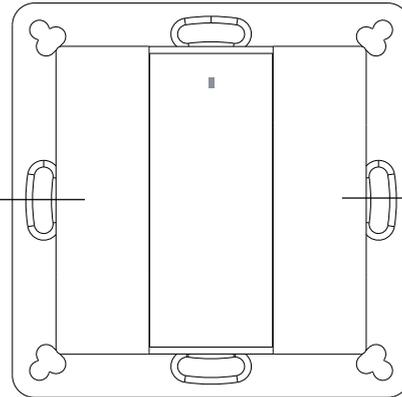

Front side

Battery: CR2430

Before the first use, please open the battery cover and remove the protective film.

## SAFETY AND WARNINGS

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

## PRODUCT DATA

Output	RF signal
Operation Frequency	868/869.5/434MHz
Power supply	3V (1xCR2430 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Measurements	71.2 x 71.2 x 13.6 mm

- Control 1 zone of RF receiver
- Single colour controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Protection class: IP20

## INSTALLATION

### Pair with RF Receiver:

1. Click "**Learning**" key on RF receiver.
2. Click ON or OFF button on RF remote.
3. The LED lights connected with the receiver will flicker once when successfully paired.

### Delete the pairing:

Hold down the "**Learning**" key button on the receiver for 4 seconds until the connected LED light on receiver flickers twice, indicating it is deleted.

The key part of this controller is a universal, extremely rotary standard switch element that can be integrated in numerous frames by different manufactures as below list:

BEKER	S1, B1, B3, B7 glass
GIRA	Standard 55, E2, Event, Esprit
JUNG	A500, Aplus
MERTEN	M-Smart, M-Arc, M-Plan