


# RADIM REMOTE 5 ZONES

220-240VAC 50/60Hz IP20

## INTRODUCTION

**IMPORTANT:** Read all the instructions prior to installation

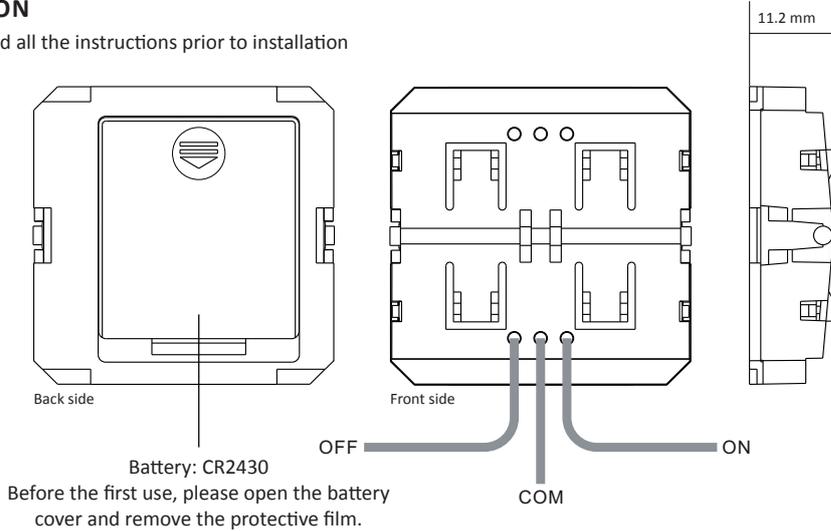

## SAFETY AND WARNINGS

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.


## PRODUCT DATA

Output	RF signal
Operation Frequency	868/869.5/434MHz
Power supply	3V(1xCR2430 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Size: (L x B x H)	40 x 40 x 11.2mm


- Convert the push switch to be a RF remote dimmer switch
- Control 1 zone
- Single colour controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Protection class: IP20

## WIRING DIAGRAM

### 1 WITH 1 KEY PUSH SWITCH

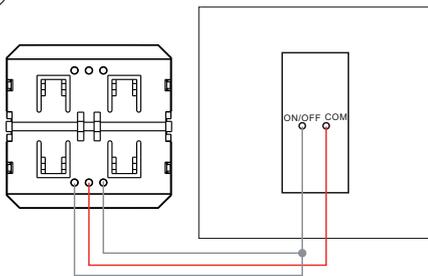

### 2 WITH 2 KEYS PUSH SWITCH

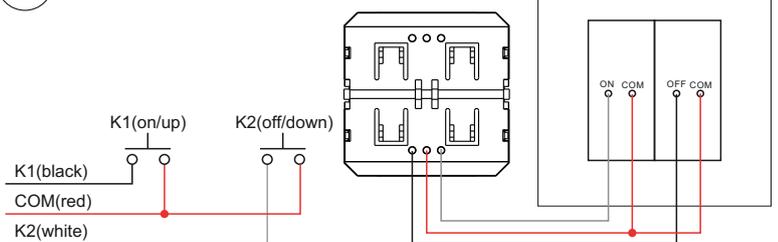

## INSTALLATION

### Pair RF Receiver with RF remote:

1. Click the "Learning" key button on receiver.
2. Click any button on the push switch.
3. The LED lights connected with the receiver will flicker once when successfully paired.


**Note:** one receiver can be paired with max 8 remote controls.

### Delete the pairing:

Hold down the "Learning" key button on the receiver for 4 seconds until the connected LED light on receiver flickers twice, indicating it is deleted.

### How to dim with push switch:

#### 1 key version

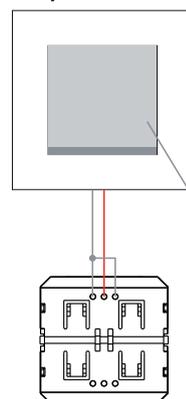

#### Double keys version

