

Two-piece device snaps together to quickly seal cable penetrations in fire-rated bulkheads and decks.

## Product Features

- Tested to 2010 IMO FTP Code, Part 3 (Class A-0 through A-60 (bulkheads and decks) and H-0 through H-120 (bulkheads only))
- Ideal for one or more cables with total O.D. 14 mm (also tested for small metallic and nonmetallic tubes)
- Steel clip design accommodates a range of division thicknesses (4 mm - 12 mm)
- Capable of an IP66 Rating with a thin application of MFS Sealant over the flange (Tested to IEC60529, Edition 2.1)
- Rapid intumescent expansion under fire conditions quickly seals off the path for fire, hot gases, and smoke
- Paintable

## Installation Instructions


General Notes: Read Safety Data Sheets (SDS) and product label for safe handling. For further information regarding installation requirements, please refer to the corresponding Type Approvals.

Step 1: Cut Ø28 mm -1.0 mm (Ø1.1 in. - 0.04 in.) opening in division.

Step 2: Insert cable(s) or tube(s) through opening.


Step 3: Wrap Snap-Seal halves around cable(s) or tube(s).

Step 4: Insert through opening until the pre-bent tabs are engaged.

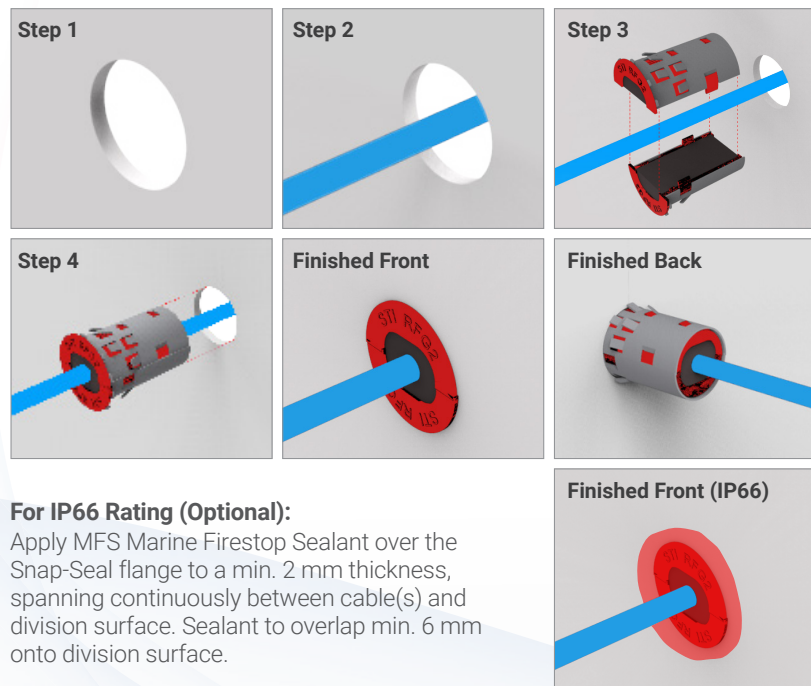

## For IP66 Rating (Optional):

Apply MFS Marine Firestop Sealant over the Snap-Seal flange to a min. 2 mm thickness, spanning continuously between cable(s) and division surface. Sealant to overlap min. 6 mm onto division surface.

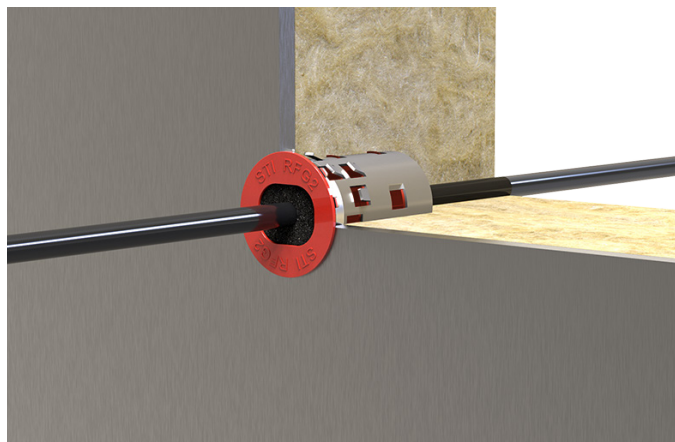

## PHYSICAL PROPERTIES

Color	Red Grommet & Silver Clip
Shelf Life	No Limit
Weight	26 g (0.06 lbs)
In-Service Temperature	<54°C (<130°F)
VOC Content	No Limit
Overall Length	41.3 mm (1-5/8 in.)
Installed Depth (from division surface)	39.7 mm (1-9/16 in.)
Required Opening	Ø28 mm -1.0 mm (Ø1.1 in. -0.04 in.)

## Maintenance

Maintenance free. Observed damage can be repaired per the original approved design.

## Third Party Approvals



## ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
MSS25	730573471050	Two-Piece Split Cable Plug	1	100 (10 Packs of 10)	0.20 kg (0.45 lbs)