


TITLE: Plug&Play Tank Cable, M8, 5P to 2x5559-02p

P/N: Cable2-XXM

DATE: 2022.11.28

REV:B

PAGE 1 OF 1

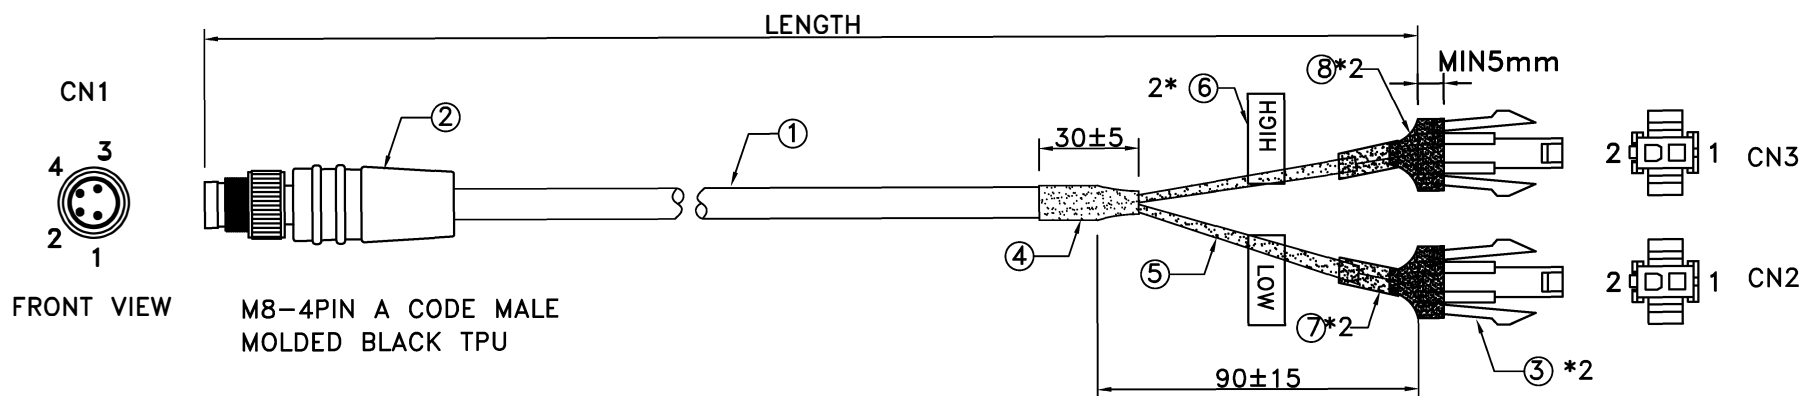

ELECTRICAL CHARACTERISTICS

1.100% OPEN SHORT&MISS WIRE TEST.

2.CONTACT RESISTANCE: 3 ohm.

3.INSULATION RESISTANCE: DC300V/0.1S 5M ohm.

P/N	LENGTH
	5000 ⁺²⁵⁰ ₀
	10000 ⁺⁵⁰⁰ ₀

8	SHRINK TUBE WITH ADHESIVE LINED Ø12.7 BLACK
7	SHRINK TUBE Ø7.0 BLACK
6	LABEL PRINTING: LOW & HIGH
5	SHRINK TUBE Ø3.0 BLACK
4	SHRINK TUBE Ø6.0 BLACK
3	TERMINAL Molex: 3900-0040 PITCH 4.2mm Molex: 3901-2021
2	MOLDED: TPU BLACK COLOR NUT: BRASS WITH NICKEL PLATED INSULATOR: BLACK NYLON 66 UL 94V-0 RATED PIN: BRASS WITH GLOD PLATED M8-4PIN A CODE MALE SOLDER TYPE
1	UL21100(4C/20#)+A OD:5.5mm LSZH BLACK PE JACKET
ITEM	DESCRIPTION

PIN OUT

CN1	CN2	CN3
1-BROWN	1	
2-WHITE	2	
3-BLUE		1
4-BLACK		2

Length	Tolerance	APPROVED BY:	
≤ 0.3m	+25/-0 mm		
> 0.3-1.5m	+50/-0 mm	CHECKED BY:	UNIT: mm
> 1.5-3m	+100/-0mm		
> 3-7.5m	+150/-0mm	DRAWN BY: A DU	SCALE:NONE
> 7.5m	+5%/-0%		

Centex Knutsen Norge AS