DATASHEET - MSC-R-10-M9(24VDC)



Reversing starter, 3p, 4.0kW/400V/AC3, 150kA

MSC-R-10-M9(24VDC) 283202

4365073

Catalog No.

Alternate Catalog

No.

Part no.

EL-Nummer (Norway)

XTSR010B009BTDNL



1/5

Delivery program

| Basic function | | | Reversing starters (complete devices) |
|--|----------------|----|---|
| Basic device | | | MSC |
| | | | IE3 ✓ |
| Notes | | | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection to SmartWire-DT | | | no |
| Motor ratings | | | |
| Motor rating | | | |
| AC-3 | | | |
| 380 V 400 V 415 V | Р | kW | 4 |
| Rated operational current | | | |
| AC-3 | | | |
| 380 V 400 V 415 V | l _e | Α | 8.5 |
| Rated short-circuit current 380 - 415 V | Iq | kA | 150 |
| Setting range | | | |
| Setting range of overload releases | I _r | Α | 6.3 - 10 |
| Coordination | | | Type of coordination "1" |
| Contact sequence | | | M 3- |
| Actuating voltage | | | 24 V DC |
| Motor-protective circuit-breakers PK7M0-10 | | | DC voltage |

Motor-protective circuit-breakers PKZM0-10

Contactor DILM9-01(...)

DOL starter wiring set

Mechanical connection element and electrical electric contact module PKZM0-XRM12

Notes

The reversing starter (complete unit) consists of a PKZM0 motor-protective circuit-breaker and two DILM contactors.

With the adapter-less top-hat rail mounting of starters up to 12 A, only the motor-protective circuit-breaker on the top-hat rail requires an adapter. The contactors are provided with mechanical support via a mechanical connection element.

Control wire guide with max. 6 conductors up to 2.5mm external diameter or 4 conductors up to 3.5mm external diameter.

From 16 A, the motor-protective circuit-breakers and contactors are mounted on the top-hat rail adapter plate.

The connection of the main circuit between PKZ and contactor is established with electrical contact modules.

Complete units with mechanical interlock, starters up to 12 A also feature electrical interlock.

When using the auxiliary contacts DILA-XHIT... (-> 101042) the plug-in electrical connector can be removed without the removal of the front mounting auxiliary contact.

For further information

Technical data PKZM0 Accessories PKZ

→ PKZM0 → 072896

Eaton 283202 ED2019 V58.0 EN

Technical data General

| Standards | | | UL 508 (on request) CSA C 22.2 No. 14 (on request) |
|---------------------------------------|------------------|------|---|
| Mounting position | | | |
| Main conducting paths | | | |
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated operational voltage | U _e | V | 230 - 415 |
| Rated operational current | | | |

Additional technical data

Open, 3-pole: 50 – 60 Hz 380 V 400 V

| Motor protective circuit breaker PKZM0, PKE | PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/ |
|---|---|
| | PKZM0 product group |
| | DILM contactors, see contactor product group |
| | DILET timing relay, ETR, see contactors, electronic timing relays product group |

Sealing

Α

W

3

Power consumption DC operated

| Rating data for approved types | | |
|--------------------------------|---|------|
| Auxiliary contacts | | |
| Pilot Duty | | |
| AC operated | | A600 |
| DC operated | | P300 |
| General Use | | |
| AC | V | 600 |
| AC | Α | 15 |
| DC | V | 250 |
| DC | А | 1 |

Design verification as per IEC/EN 61439

| Technical data for design verification | | | |
|--|-------------------|----|--|
| Rated operational current for specified heat dissipation | In | Α | 9 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 3 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 9 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 2.6 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $\frac{1}{2} = \frac{1}{2} \left(\frac{1}{2} + \frac{1}{2} \right) \left(\frac{1}{2} + \frac{1}{2} + \frac{1}{2} \right) \left(\frac{1}{2} + \frac{1}$ | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |

| 10.2.6 Mechanical impact | Does not apply, since the entire switchgear needs to be evaluated. |
|--|--|
| 10.2.7 Inscriptions | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | Is the panel builder's responsibility. |
| 10.9 Insulation properties | |
| 10.9.2 Power-frequency electric strength | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | Is the panel builder's responsibility. |
| 10.10 Temperature rise | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


| Kind of motor starter | | Reversing starter |
|--|----|-------------------|
| With short-circuit release | | Yes |
| Rated control supply voltage Us at AC 50HZ | V | 0-0 |
| Rated control supply voltage Us at AC 60HZ | V | 0-0 |
| Rated control supply voltage Us at DC | V | 24 - 24 |
| Voltage type for actuating | • | DC |
| Voltage type for actuating | | DC |
| Rated operation power at AC-3, 230 V, 3-phase | kW | 2.2 |
| Rated operation power at AC-3, 400 V | kW | 4 |
| Rated power, 460 V, 60 Hz, 3-phase | kW | 0 |
| Rated power, 575 V, 60 Hz, 3-phase | kW | 0 |
| Rated operation current le | A | 8.5 |
| Rated operation current at AC-3, 400 V | A | 9 |
| Overload release current setting | A | 6.3 - 10 |
| Rated conditional short-circuit current, type 1, 480 Y/277 V | A | 0 |
| Rated conditional short-circuit current, type 1, 600 Y/347 V | A | 0 |
| Rated conditional short-circuit current, type 2, 230 V | A | 0 |
| Rated conditional short-circuit current, type 2, 400 V | A | 0 |
| Number of auxiliary contacts as normally open contact | | 0 |
| Number of auxiliary contacts as normally closed contact | | 0 |
| Ambient temperature, upper operating limit | °C | 60 |
| Temperature compensated overload protection | | Yes |
| Release class | | CLASS 10 |
| Type of electrical connection of main circuit | | Screw connection |
| Type of electrical connection for auxiliary- and control current circuit | | Screw connection |
| Rail mounting possible | | Yes |
| With transformer | | No |
| Number of command positions | | 0 |
| Suitable for emergency stop | | No |
| Coordination class according to IEC 60947-4-3 | | Class 1 |
| Number of indicator lights | | 0 |
| External reset possible | | No |
| | | |

| With fuse | | No |
|---|----|-------|
| Degree of protection (IP) | | IP20 |
| Degree of protection (NEMA) | | Other |
| Supporting protocol for TCP/IP | | No |
| Supporting protocol for PROFIBUS | | No |
| Supporting protocol for CAN | | No |
| Supporting protocol for INTERBUS | | No |
| Supporting protocol for ASI | | No |
| Supporting protocol for MODBUS | | No |
| Supporting protocol for Data-Highway | | No |
| Supporting protocol for DeviceNet | | No |
| Supporting protocol for SUCONET | | No |
| Supporting protocol for LON | | No |
| Supporting protocol for PROFINET IO | | No |
| Supporting protocol for PROFINET CBA | | No |
| Supporting protocol for SERCOS | | No |
| Supporting protocol for Foundation Fieldbus | | No |
| Supporting protocol for EtherNet/IP | | No |
| Supporting protocol for AS-Interface Safety at Work | | No |
| Supporting protocol for DeviceNet Safety | | No |
| Supporting protocol for INTERBUS-Safety | | No |
| Supporting protocol for PROFIsafe | | No |
| Supporting protocol for SafetyBUS p | | No |
| Supporting protocol for other bus systems | | No |
| Width | mm | 90 |
| Height | mm | 180 |
| Depth | mm | 95 |

Approvals

| Product Standards | UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking |
|--------------------------------------|---|
| UL File No. | E123500 |
| UL Category Control No. | NKJH |
| CSA File No. | 12528 |
| CSA Class No. | 3211-24 |
| North America Certification | UL listed, CSA certified |
| Specially designed for North America | No |

Dimensions

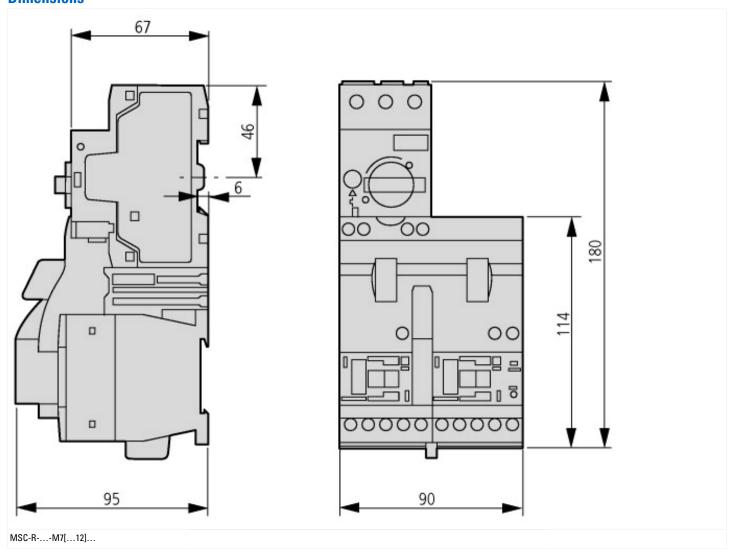

Assets (links)

Declaration of CE Conformity

00002885

Instruction Leaflets IL03402006Z2018_04