

# FDV



## LED Strips Megalys NG

El nr	32 851 30
Article nr	737204
EAN	7090015370734



### Lysteknikk

Type lyskilde	SMD LED 5050
Spenning	24VDC
Watt	12W pr meter
Systemeffekt (W)	14,4W pr meter
Antall LED pr meter	60 LEDs pr meter
Effektiv lysstrøm (lm)	1100 lm
Effekt	76lm/W
Fargetemperatur	2700K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<5
Levetid (IEC62717 Ta25)	62000h L80B50
Lysspredning	120°

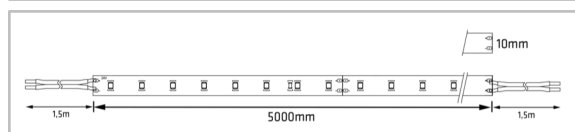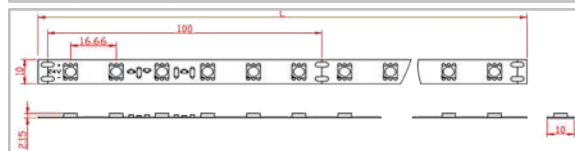

### Dimmetype

Type	Velg mellom LED drivere
------	-------------------------

### Montering/Tilkobling

Montering	Utenpåliggende
Kabling	1,5m ledning begge ender

### Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad	IP20

### Dimensjoner (mm)

Lengde (L)	5000 mm
Høyde (H)	3 mm
Bredde (W)	10 mm
Vekt	0,176 kgs

### Materialer og overflater

Armaturhus	Brass (PCB)
Farge	Hvit


### Forpakning

Eske dimensjon	215x215x8 mm
Eske Vekt	0,196 kgs
Kartong Dimensjon	430x430x270 mm
Antall/Kartong	50 stk
Kartong Vekt	9,80 kgs

### Energi og godkjenning

Energi klasse	A-A+
Godkjenning	CE, RoHS

## LED Strips Megalys NG

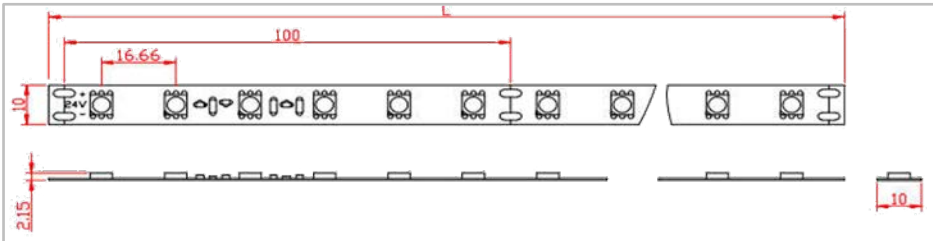

### IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. For indoor use only.

### MAIN PARAMETER:

Product	<b>737204</b>	<b>737214</b>
Rated Voltage	24VDC	24VDC
LED watt	12W/meter	12W/meter
System eff	14,4W/meter	14,4W/meter
Number of LED per meter	60 LEDs/meter	60 LEDs/meter
LED	SMD LED 5050	SMD LED 5050
Color Temperature	2700K	4000K
Protection	Class III	Class III
Beam Angle	120°	120°
IP Rated	IP20	IP20
Operation Temperature	-25°C <ta<45°C	-25°C <ta<45°C
Product Size	10x2,15x5000mm	10x2,15x5000mm


### INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

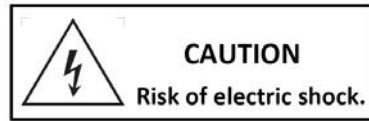


### INSTALLATION STEPS:


1. Select the required position for luminaire and make sure the surface is clean. Tear off 3M double-sided adhesive to install.

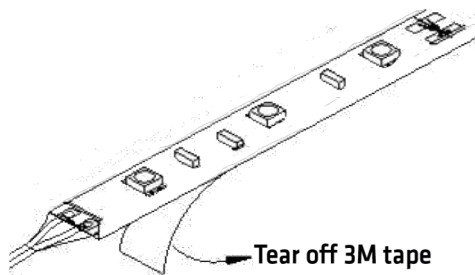

2. Secure LED strip Megalys NG with clip using screws.

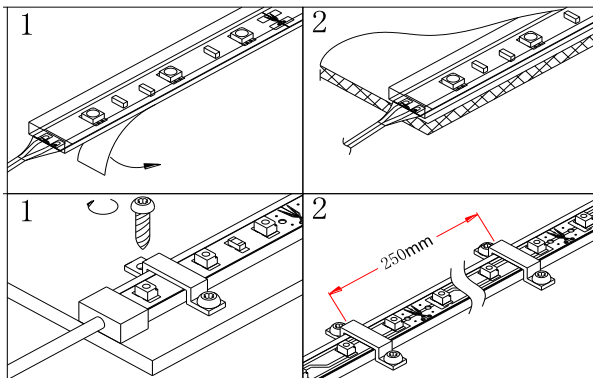

3. Connection diagram -



**NOTE:** LED Strips Megalys NG is with 1,5 meter cable on both ends.