

LED luminaire

IMPORTANT INFORMATION:


1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. For indoor use only.

MAIN PARAMETER:

Product:	103504 Kobehvit	103505 Børstet Aluminium
Input Voltage	12V DC	12V DC
LED Rated Power	3,5W	3,5W
System Power	4W	4W
LED	Samsung SMD LED	Samsung SMD LED
Color Temperature	2700K	2700K
Protection	Class III	Class III
Beam Angle	90°	90°
IP Rated	IP44	IP44
Operation Temperature	-25°C - +40°C	-25°C - +40°C
Cut-out Size:	Ø56mm (Recessed Mounting)	Ø56mm (Recessed Mounting)
Product Size:	Ø65mmxH21mm (with Mounting Base)	

INSTALLATION INSTRUCTIONS:


1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. A 12V DC constant voltage LED driver is required. **(NOT included)**



INSTALLATION STEPS:

Surface Mounting

1. Select the required position for the luminaires. Drill a small hole to allow the wires from the luminaires to pass through the mounting surface for surface wiring.

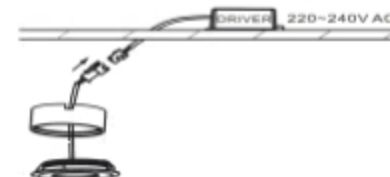

2. Feed the wires through the small hole and connect the plastic AMP plug at the ends of the wires.



3. Fix the mounting base to the cabinet with screws. Push the luminaire up into mounting base. Ensure that it is securely located.

IMPORTANT: Ensure connection of the LED cabinet luminaires to the 12V DC supply is correct.




Recessed Mounting

1. Select the required position for the luminaire. Cut-out for the downlight.



Cut-out: Ø56mm

2. Feed the wires through the cut-out and connect the plastic AMP plug at the ends of the wires. Push the luminaire up into cutting hole. Ensure that it is securely located.
3. Switch on the power supply.



IMPORTANT: Ensure connection of the LED cabinet luminaires to the 12V DC supply is correct

