


# Electronic overload relays EF205 and EF370

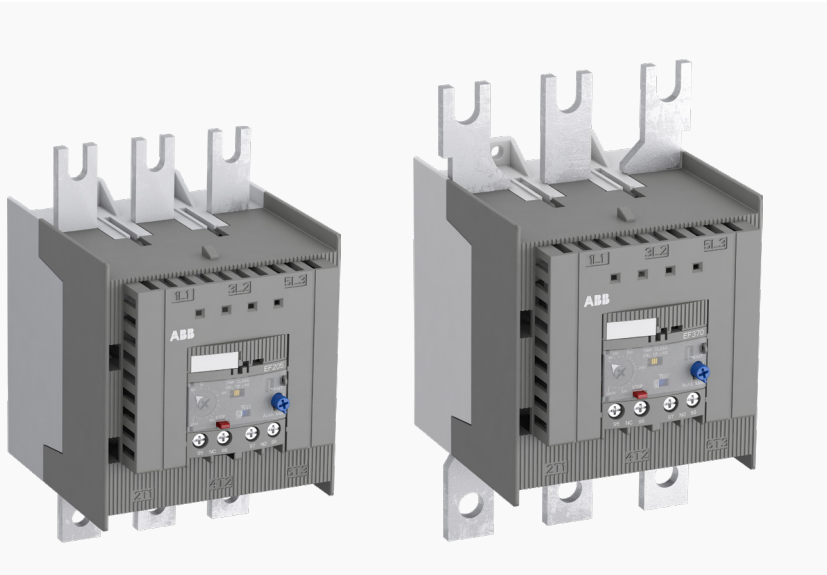

Electronic overload relays offer reliable protection in case of overload and phase-failure. They are the alternative to thermal overload relays. Motor starters are combinations of overload relays and contactors.

## Description

- Overload protection – trip class 10E, 20E, 30E selectable
- Phase loss sensitivity
- Temperature compensation from -25 ... +70 °C
- Adjustable current setting for overload protection
- Automatic or manual reset selectable
- Trip-free mechanism
- Status indication
- STOP and TEST function
- Direct mounting onto block contactors
- Sealable operating elements
- Self-supplied devices




## Order data

EF205, EF370 screw terminal  
For A145 ... AF370 block contactors

Setting range	Type	Order code	Weight Pkg (1 pce) kg
A			kg
63 ... 210	EF205-210	1SAX531001R1101	1.256
115 ... 380	EF370-380	1SAX611001R1101	1.338

Suitable for mounting on:  
A145, A185, AF145, AF185, AF190, AF205  
A210, A260, A300, AF210, AF260, AF265, AF300, AF305, AF370

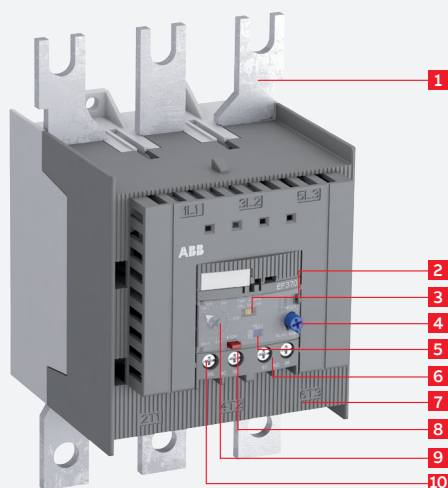

**Functional description**


1. Terminals 1L1, 3L2, 5L3
2. Sealable operating elements
3. Trip class 10E, 20E, 30E selectable
4. RESET - Automatic or manual reset selectable
5. TEST - Status indication
6. Signaling contacts 97-98
7. Terminals 2T1, 4T2, 6T3
8. STOP
9. Current setting range / Self-test function ST  
Adjustable current setting for overload protection
10. Tripping contacts 95-96

**Application / internal function**

The self-supplied electronic overload relays are three pole electronic/mechanical devices. The motor current flows through build-in current transformers and an evaluation circuit will recognize an overload (over current). This will lead to a release of the relay and a change of the contacts switching position (95-96 / 97-98). The contact 95-96 is used to control the load contactor. The electronic overload relay is self-supplied, which mean no extra external supply is needed.


The overload relays have a setting scale in Amperes, which allows the direct adjusting of the relay without any additional calculation. In compliance with international and national standards, the setting current is the rated current of the motor and not the tripping current (no tripping at  $1.05 \times I$ , tripping at  $1.2 \times I$ ;  $I$  = setting current). The relays are constructed in a way that they protect themselves in the event of an overload. The overload relay has to be protected against short-circuit. The appropriate short-circuit protective devices are shown in the following tables. To prevent thermal overloads in heavy duty applications, the correct cable sizes have to be selected.

**Operation mode**

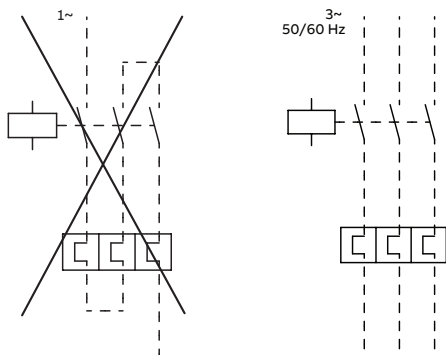

	Contact 95-96	Contact 97-98	Opto-mechanical slide	Comment
Trip state	open	closed		
RESET state	closed	open	ON	
TEST manual reset mode	open	closed		
TEST auto reset mode	open	closed		
STOP while device is in trip state	open	closed		STOP button has no function
STOP while device is in RESET state	open	open		while STOP button is pressed




**Wiring diagram**

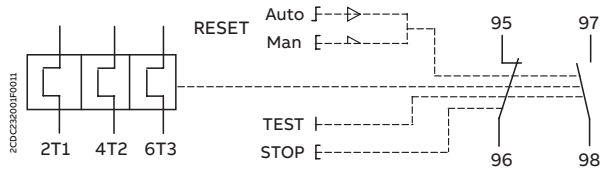


**Resistance and power loss per pole and short-circuit protective devices**

Type	Setting range		Resistance per pole mΩ	Power loss per pole		Short-circuit protective devices coordination type 2
	lower value A	upper value A		at lower value W	at upper value W	
EF205-210	63	210	0.027	0.107	1.191	Fuse 1250 A, Type gG
EF370-380	115	380	0.028	0.370	4.043	Fuse 1600 A, Type gG


**Intermittent periodic duty**



Dimensions

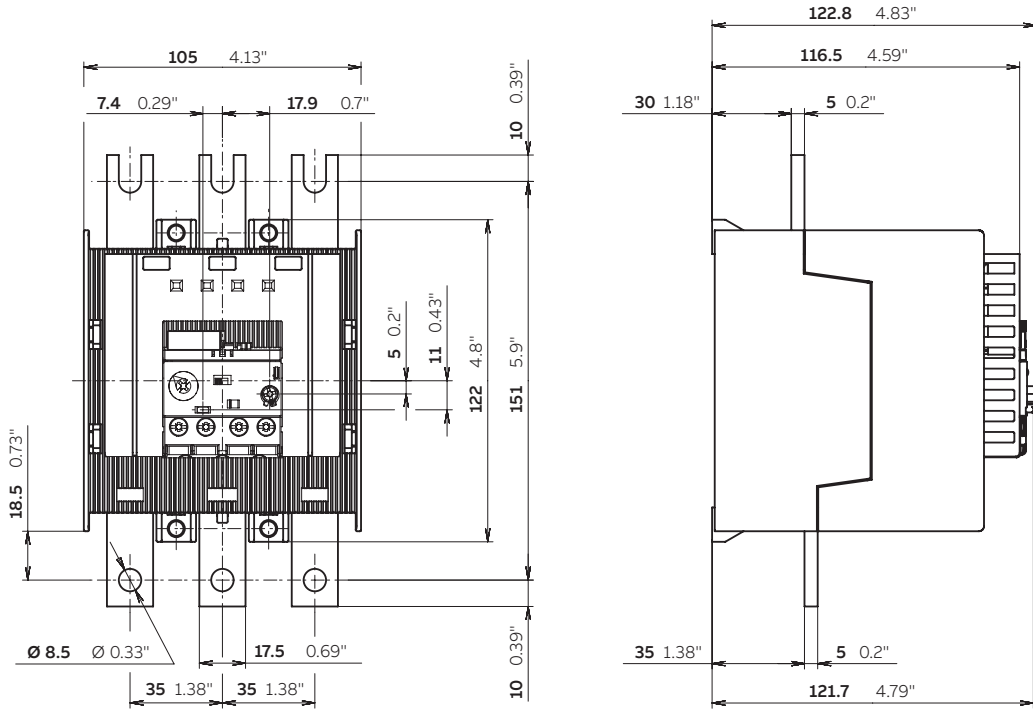

EF205-210

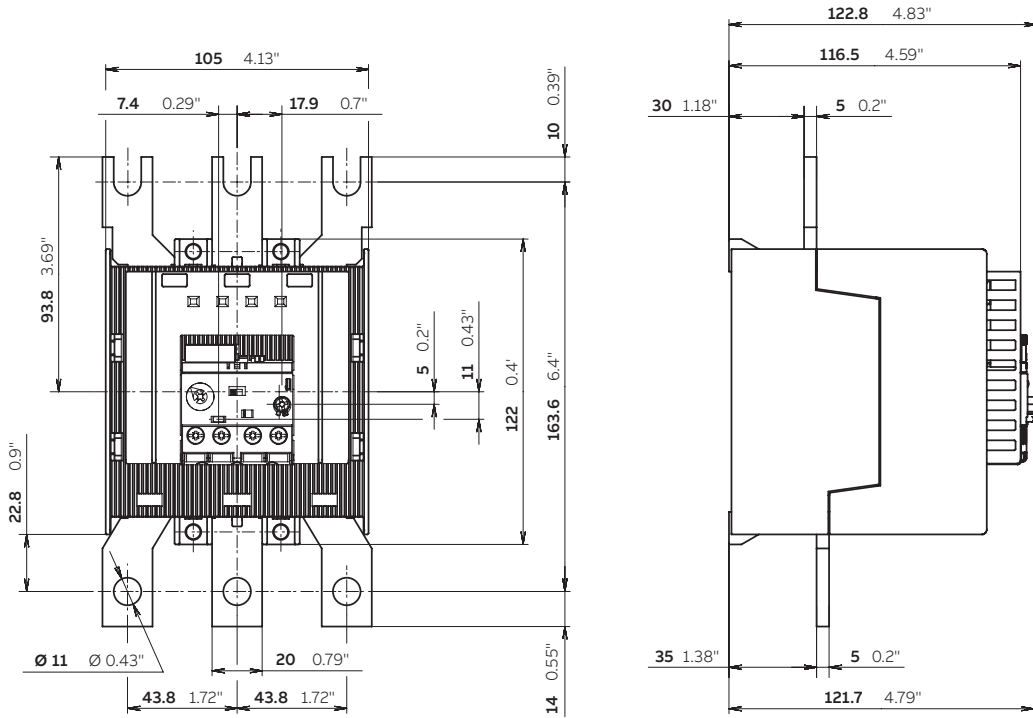

EF370-380


**Technical data IEC/EN**Data at  $T_a = 40\text{ °C}$  and at rated values, if nothing else indicated**Main circuit**

	EF205, EF370
Rated operational voltage $U_e$	1000 V AC - V DC
Setting range - electronic overload protection	see table on page 1
Rated operational current AC-3 $I_e$	see upper value of setting range, on page 5
Trip class	10E, 20E, 30E, selectable
Rated frequency	50/60 Hz
Number of poles	3
Resistance per pole	see table on page 5
Power loss per pole	see table on page 5
Short-circuit protective devices	see table on page 5

**Isolation data**

	EF205, EF370
Rated impulse withstand voltage $U_{imp}$	8 kV
Rated insulation voltage $U_i$	1000 V
Pollution degree	3
Overvoltage category	up to III

**Electrical connection**

Type	EF205	EF370
rigid with cable lug	1 x 16 ... 185 mm <sup>2</sup> 2 x 16 ... 120 mm <sup>2</sup>	50 ... 240 mm <sup>2</sup> 50 ... 150 mm <sup>2</sup>
flexible with cable lug	1 x 16 ... 185 mm <sup>2</sup> 2 x 16 ... 120 mm <sup>2</sup>	50 ... 240 mm <sup>2</sup> 50 ... 150 mm <sup>2</sup>
Stripping length	-	-
Tightening torque	18 Nm	28 Nm
Screw type	M8	M10
 Lug/ Bar	L ≤ 24 mm Ø > 8 mm	32 mm 10 mm





**Auxiliary circuit**

		EF205, EF370
Rated operational voltage U <sub>e</sub>		600 V AC / DC
Conventional free air thermal current I <sub>th</sub>		6 A
Rated frequency		DC, 50/60 Hz
Number of poles		1 N.C. + 1 N.O.
Rated operational current I <sub>e</sub> acc. to IEC/EN 60947-5-1 for utilization category		
at AC-15 at 110-120 V	N.C. 95-96	3.00 A
	N.O. 97-98	3.00 A
at AC-15 at 220-230-240 V	N.C. 95-96	3.00 A
	N.O. 97-98	3.00 A
at AC-15 at 400 V	N.C. 95-96	1.10 A
	N.O. 97-98	1.10 A
at AC-15 at 480-500 V	N.C. 95-96	0.75 A
	N.O. 97-98	0.75 A
at DC-13 at 24 V	N.C. 95-96	1.50 A
	N.O. 97-98	1.50 A
at DC-13 at 60 V	N.C. 95-96	0.55 A
	N.O. 97-98	0.55 A
at DC-13 at 110-120-125 V	N.C. 95-96	0.55 A
	N.O. 97-98	0.55 A
at DC-13 at 250 V	N.C. 95-96	0.27 A
	N.O. 97-98	0.27 A
Minimum switching capacity		12 V / 3 mA $\lambda = 10^{-7}$ ; U <sub>kd</sub> = 3 V / 500.000 operating cycles
Short-circuit protective devices		fuse 6 A, Type gG

**Isolation data**

		EF205, EF370
Rated impulse withstand voltage U <sub>imp</sub>		6 kV
Rated insulation voltage U <sub>i</sub>		690 V
Pollution degree		3
Overvoltage category		up to III

**Electrical connection**

Auxiliary circuit		EF205, EF370
 rigid		1 x 1 ... 4 mm <sup>2</sup> 2 x 1 ... 4 mm <sup>2</sup>
 flexible with ferrule		1 x 0.75 ... 2.5 mm <sup>2</sup> 2 x 0.75 ... 2.5 mm <sup>2</sup>
 flexible with ferrule insulated		1 x 0.75 ... 2.5 mm <sup>2</sup> 2 x 0.75 ... 2.5 mm <sup>2</sup>
 flexible		1 x 0.75 ... 2.5 mm <sup>2</sup> 2 x 0.75 ... 2.5 mm <sup>2</sup>
Stripping length		9 mm
Tightening torque		0.8 ... 1.2 Nm
Recommended screw driver		Pozidriv 2

**General data**

Duty time		100 %
Operating frequency without early tripping		see diagrams on page 3
Dimensions (W x H x D)		see dimension drawing
Weight		see ordering data
Mounting		screw with two screws on plate and tighten the screws of the main circuit terminals
Mounting on plate		M5 2 Nm / 18 lb.in
Mounting position		optional, position 1-6
Minimum distance to other units same type	horizontal	none
	vertical	not applicable
Minimum distance to electrical conductive board	horizontal	1.5 mm
	vertical	1.5 mm
Degree of protection	housing	IP20
	main circuit terminals	IP10
Maximum operating altitude		2000 m

**Electromagnetic compatibility**

Immunity acc. to IEC 60947-1		Environment A
Emission acc. to IEC 60947-1		Environment B

**Environmental data**

Ambient air temperature		
Operation	open - compensated	-25 ... +70 °C
	open	-25 ... +70 °C
Storage		-50 ... +85 °C
Ambient air temperature compensation		acc. to IEC/EN 60947-4-1
Resistance to vibrations acc. to IEC 60068-2-6		5g / 3 ... 150 Hz
Resistance to shock acc. to IEC 60068-2-27		15g / 11 ms

**Standards / directives**

Standards		IEC/EN 60947-1 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947-1 UL 60947-4-1
Low Voltage Directive		2014/35/EU
EMC Directive		2014/30/EU
RoHS Directive		2011/65/EU
ATEX Directive		2014/34/EC

## Technical data UL/CSA

### Full load amps and short-circuit protective devices

Type	Full load amps (FLA)	Short circuit protective devices								
		480 V AC		600 V AC			600 V AC		600 V AC	
		SCCR	Circuit breaker	SCCR	Fuse K5 / RK5	Circuit breaker	SCCR	Fuse J	SCCR	Circuit breaker
EF205-210	210 A	100 kA	400 A	10 kA	400 A	400 A	100 kA	400 A	100 kA	400 A
EF370-380	380 A	100 kA	800 A	18 kA	800 L/T	800 A	100 kA	600 A	100 kA	600 A

### Main circuit

Maximum operational voltage	600 V AC
Trip rating	125 % of FLA
Full load amps (FLA)	see table above
Short-circuit rating RMS symmetrical	see table above
Short-circuit protective devices	see table above

### Electrical connection

Type	EF205	EF370
stranded with cable lug	1 x AWG 6 ... 0000 2 x AWG 6 ... 0000	1 x AWG 1 ... 500 kcmil 2 x AWG 1 ... 500 kcmil
flexible with cable lug	1 x 6 ... 0000 2 x 6 ... 0000	1 x AWG 1 ... 500 kcmil 2 x AWG 1 ... 500 kcmil
Lug/Bar	L ≤ 24 mm	32 mm
	∅ > 8 mm	10 mm
Stripping length	-	-
Tightening torque	160 lb.in	247 lb.in
Screw type	M8	M10

### Auxiliary circuit

Conventional thermal current	6 A
Making and breaking capacity	N.C. / N.O. B600, Q600

### Electrical connection

Auxiliary circuit	EF205, EF370
stranded	1 x AWG 18 ... 10 2 x AWG 18 ... 10
flexible	1 x AWG 18 ... 10 2 x AWG 18 ... 10
Stripping length	9 mm
Tightening torque	7 ... 11 lb.in
Recommended screw driver	Pozidriv 2





---

**ABB STOTZ-KONTAKT GmbH**  
Eppelheimer Straße 82  
69123 Heidelberg, Germany  
Phone: +49 (0) 6221 7 01-0  
Fax: +49 (0) 6221 7 01-13 25  
E-Mail: [info.desto@de.abb.com](mailto:info.desto@de.abb.com)

[abb.com/contacts](http://abb.com/contacts)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regards to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2020 ABB - All rights reserved