

El nr	32 362 45
Article nr	241905
EAN	7090015379454

**Lysteknikk**

Type lyskilde	LED (Samsung SMD LED)
Spenning	230VAC 50/60Hz
Watt	9W
Systemeffekt (W)	11W
Effektiv lysstrøm (lm)	850lm
Effekt	77,3lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid (IEC 62717 Ta25)	62 000h L80B50
Lysspredning	90°
Driftstemperatur	-25°C <ta< 45°C

LED Driver

Type	Dimbar faseavsnitt
Driftsstrøm	300mA Konstantstrøm

Beskyttelse

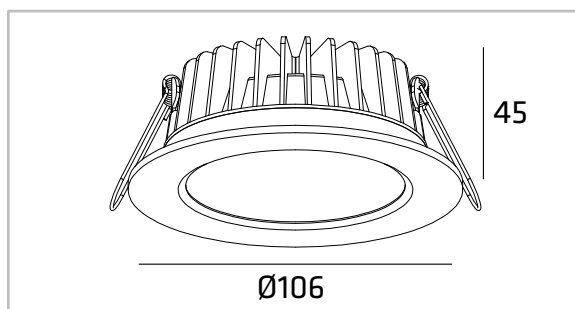
Isolasjonsklasse	Klasse II
IP-grad	IP65

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Matt Sort (RAL 9005)
Optikk	Acrylic

Energi og godkjenning

Inneholder lyskilde med Energiklasse	G
Godkjenning	CE, RoHS
Safety standard	EN 61347-2-13:2014+AMD1:2017, EN 6134701:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

**Montering/Tilkobling**

Montering	Innfelling
Kobling	Hurtigklemme

Dimensjoner (mm)

Høyde (H)	45 mm
Diameter (D)	Ø106 mm
Innfellingsdiameter	Ø83 mm
Vekt	0,26 kgs

Forpakning

Eske dimensjon	130x125x75 mm
Eske Vekt	0,30 kgs
Kartong Dimensjon	540x400x250 mm
Antall/Kartong	36 stk
Kartong Vekt	12,0 kgs