

[Skip to main content](#)

[Show navigation](#)




[Knowledge Base /](#)

[Devices /](#)

[Shelly Pro devices](#)

[Skip table of contents](#)

Shelly Pro EM-50

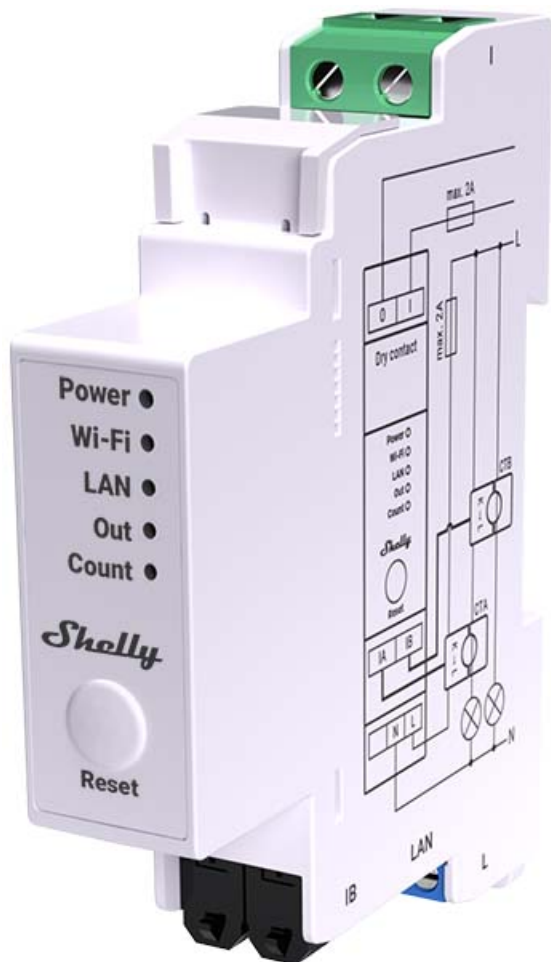

Device identification

Device name: **Shelly Pro EM-50**
Device model: **SPEM002CEBEU50**
Device SSID: **ShellyProEM50-XXXXXX**

Short description

Shelly Pro EM-50 (The Device) is a DIN rail mountable two-channel, single-phase energy meter. Enhanced with all the `gen2` firmware flexibility and LAN connectivity, it provides professional integrators with additional options for end-customer solutions. It can work standalone in a local LAN and/or Wi-Fi network, or it can also be operated through cloud home automation services through MQTT, HTTP, and WebSocket. All inbound connections support TLS.

The Device reports accumulated energy as well as instantaneous voltage, current, active, and apparent power per phase in real time. It stores data in non-volatile memory that can be retrieved for a period of up to 60 days in 1-minute intervals.

The Device has a real-time clock to keep the correct time if the connection to an SNTP server is lost.

Shelly Pro EM-50 can be accessed, set up, and monitored remotely by the User, as well as the Device can access and communicate with an automation system, as long as they are in the same network infrastructure.

The Device has an embedded Web Interface which can be used to monitor and control the device, as well as adjust its settings.

The Device has a built-in relay for contactor control.


Features

- 4 Quadrant measurement
- DIN rail mounting
- Current transformer connection
- External contactor control via built in dry-contact relay
- Optical pulse indication of energy usage
- Real-time clock
- Data logs
- Accuracy Class B (IEC 62053-21)
- Photovoltaic ready

Main applications

- Residential
- MDU (Multi Dwelling Units - apartments, condominiums, hotels, etc.)
- Light commercial (small office buildings, small retail/restaurant/gas station, etc.)
- Industrial (factories, power plants, water processing, refineries, etc.)
- Agricultural (farms, barns, silos, etc.)
- Government/municipal
- University/college

Simplified internal schematics

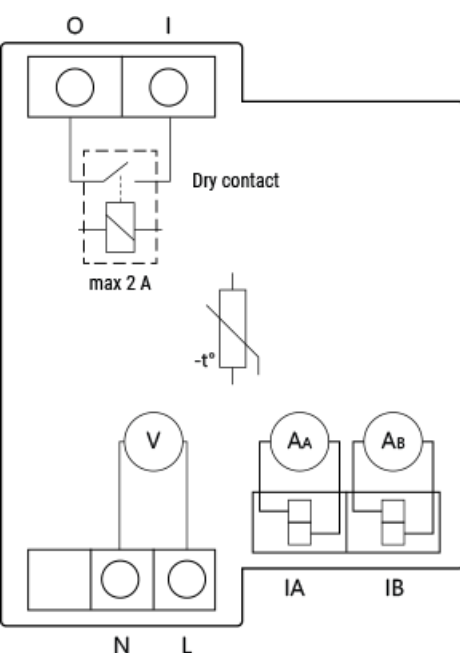

Device electrical interfaces

Inputs

- 2 line inputs on screw terminals: 1 **L** and 1 **N**
- 2 current transformer inputs: **IA** and **IB** for current measurement

Outputs

- 2 galvanically isolated relay terminals: **I** and **O**

Ethernet port


Ethernet port

1 RJ45 connector

❑ **CAUTION!** Plug in or unplug the LAN cable only when the Device is powered off! The LAN cable connector must not be metallic in the parts touched by the user to plug in or unplug the cable.

Add-on interface

Shelly proprietary serial interface

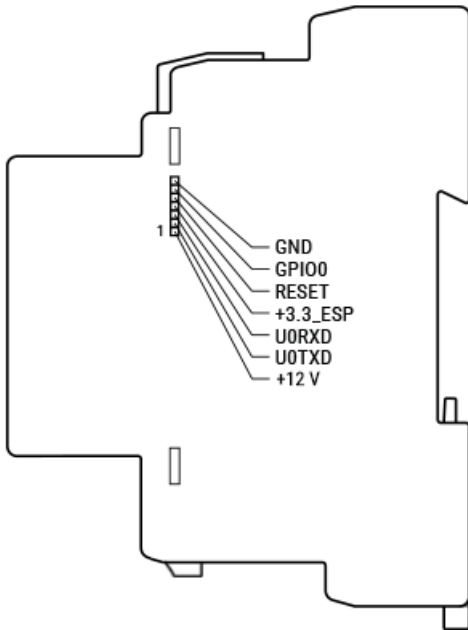

❑ **CAUTION!** High voltage on the add-on interface when the Device is powered!

Connectivity

Wi-Fi
Ethernet
Bluetooth

Each connectivity option can be enabled or disabled by the user.

Safety features

Overheating protection

Supported load types

Resistive (incandescent bulbs, heating devices)
Capacitive (LED light drivers, capacitor banks, electronic equipment, motor start capacitors)
Inductive (transformers, fans, refrigerators, air-conditioners)

User interface

Inputs

One tactile dome button

Press briefly to toggle the state of the built-in relay.
Press and hold for 5 sec to activate Device AP.
Press and hold for 10 sec to factory reset.

Outputs

LED indication

Power: Red light if the power supply is connected.

Wi-Fi (varies):

- Blue light if in AP mode.
- Red light if in STA mode, and not connected to a Wi-Fi network.
- Yellow light if in STA mode, and connected to a Wi-Fi network. Not connected to Shelly Cloud or Shelly Cloud disabled.
- Green light if in STA mode, and connected to a Wi-Fi network and the Shelly Cloud.
- The LED will be flashing Red/Blue if OTA update is in progress.

LAN: Green light if LAN is connected.

Out: Red light if the output relay contact is closed.

Count: Red light will be flashing when the Device is measuring energy according to settings with frequency dependent on the energy flowing through the measured circuit.

Specifications

Type	Value
Physical	
Size (HxWxD):	94x19x69 ±0.5 mm / 3.70x0.75x2.71 ±0.02 in
Weight:	63 ±1 g / 2.22 ±0.05 oz
Mounting:	DIN rail
Screw terminals max torque:	0.4 Nm / 4.43 lbin
Conductor cross section:	0.5 to 2.5 mm ² / 20 to 14 AWG (solid, stranded and bootlace lugs)
Conductor stripped length:	6 to 7 mm / 0.24 to 0.28 in
Shell material:	Plastic
Color:	White
Environmental	
Ambient temperature:	-20 °C to 40 °C / -5 °F to 105 °F
Humidity:	30 % to 70 % RH
Max altitude:	2000 m / 6562 ft
Electrical	
Power supply voltage AC:	100 - 260 V, 50/60 Hz
Power supply voltage DC:	N/A
Power consumption:	< 3 W
Output circuits ratings	
Max switching voltage AC:	240 V
Max switching voltage DC:	N/A
Max switching current:	2 A
Sensors, meters	
Internal-temperature sensor:	Yes
Voltmeter (RMS):	100 - 260 V
Voltmeters accuracy:	±1 %
Ammeters (RMS via CT):	0 - 50 A
Ammeters accuracy:	±1 % (5 - 50 A), ±2 % (0 - 5 A)

- Active and apparent power
- Active and apparent energy
- Power factor

At least 60 days of 1 min data resolution

- CSV for PQ recorded values
- JSON format export through RPC

Radio

2400 - 2495 MHz

<20 dBm

802.11 b/g/n

Up to 30 m/ 100 ft indoors and 50 m/ 160 ft outdoors
(Depends on local conditions)

4.2

Up to 10 m/ 33 ft indoors and 30 m/ 100 ft outdoors
(Depends on local conditions)

MCU

ESP32-D0WDQ6

16 MB

Firmware capabilities


20 with 5 URLs per hook

Yes

Yes

No

Basic wiring diagrams

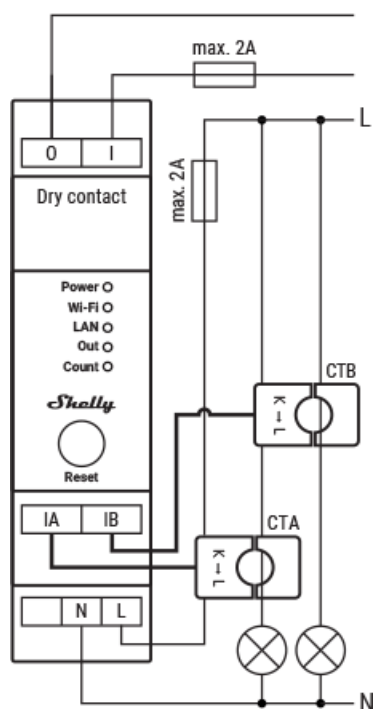

Legend

Terminals		Wires	
O	Load circuit output terminal	L	Live (110-240 V) wire
I	Load circuit input terminal	N	Neutral wire
IA	First channel current transformer input	Current transformers	
IB	Second channel current transformer input	CTA	First channel current transformer
L	Live (110-240 V) terminal	CTB	Second channel current transformer
N	Neutral terminal		

Troubleshooting

...

Components and APIs

[This device](#)
[All Shelly devices and services](#)

Compliance

[Shelly Pro EM-50 multilingual EU declaration of conformity.pdf](#)
[Shelly PRO EM - 50 UK PSTI ACT Statement of compliance.pdf](#)

Printed user guide

[Shelly Pro EM-50 multilingual printed user and safety guide.pdf](#)



[Privacy policy](#) / [Cookie policy](#) / [Support](#) / [FB community support](#) / [Contact us](#)

Copyright © 2024 Shelly Cloud. Allterco Robotics OOD • Powered by Scroll Viewport & Atlassian Confluence