



GRX3 KIT LED 5000 HF 840 220-254V - Includes: Geartray

Item No.	588184548
GTIN	7054131060764
Stock status code	M




Technical specifications

General	
Product shape	Linear
Navigation	
EMC Category	EMC2 : EMC A – IEC 60533 General Areas
Certificates	
Certification	ATEX, IECEx
Marine Approved	True
Ignition Class	T4 135°
Atex Start Code	II 2G
Class Ex Gas	Ex eb mb IIC Gb
Technical Data	
Minimum TA (°C)	-20
Maximum TA (°C)	45
Light Technical Data	
Light source	LED
Lumen Out (lm)	5618
Number Of Light Source	1
Lumen Per Watt (lm/W)	110
Lamp colour temp (K)	4000
Colour Rendering Index	>80
MacAdam step	3
Energy Class Light Source	D
Light Source Included	True
Driver / Ballast	
Type of LED Driver	HF: Non dimmable
Number of Driver	1
Lifetime	
LED Lifetime L70B50 Max Ta (h)	100 000

Electrical Data	
Main Feed AC (V) Min	220
Main Feed AC (V) Max	254
Main Feed Frequency Min	50
Main Feed Frequency Max	60
Main Feed DC (V) Min	220
Main Feed DC (V) Max	250
Total Consumption (W)	51
Number Of Luminaire MCB 10B	15
Number Of Luminaire MCB 10C	25
Number Of Luminaire MCB 16B	24
Number Of Luminaire MCB 16C	40
Leakage Current (mA)	0.7
Dimensions	
Length (mm)	1235
Width (mm)	198
Height (mm)	45
Mounting	
Product Mounting	Ceiling recessed

Illustrations

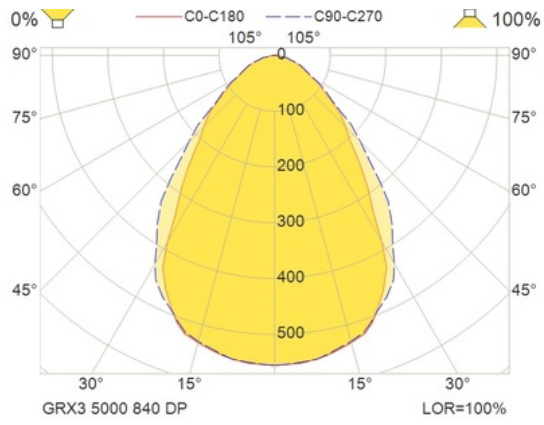

For GRX3 LED KIT 1200 mm (3700 & 5000 lm)



for GRX3 LED KIT 1200 mm (3700 & 5000 lm)