


## fibreflow Blown Fibre 3 way Wrapped

This provisional sheet defines a proposed product, that has not been manufactured. We expect to be able to offer this product and that it will exhibit the characteristics listed here. Detail checks may be incomplete at this time, and details may change. Minimum order quantities and lead times to be finalised.

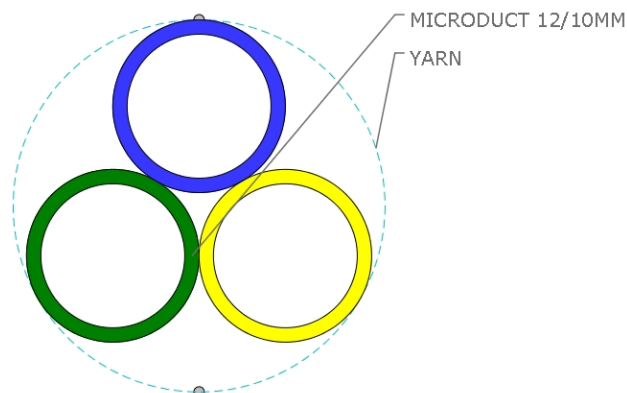

### PRODUCT DETAILS

#### Overall

Outside Diameter	24.0mm nominal, triangular in shape
Mass	100g/m
Outer sheath	Wrapping yarn
Minimum bend radius	350 mm
Maximum installation tension	60kg, 600N, ensure load is shared between microducts
Application	Direct Install into duct,

#### Microducts

Number and size	x3, outer diameter 12.0mm nominal, inner diameter 10.0mm nominal
Material	HDPE

Note 1: Diameters and thicknesses are measured to nearest 0.1mm.

Note 2: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.

CPform2