


PRODUCT-DETAILS

## ADI 3M

### ADI 3M Insulated connector

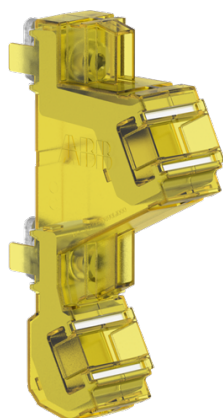

#### General Information

Extended Product Type	ADI 3M
Product ID	2CGD000692A1000
EAN	7331980053797
Catalog Description	ADI 3M Insulated connector
Long Description	Insulated connector for compact fitting of ADI 300.

#### Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85381000
Country of Origin	Sweden (SE)

#### Popular Downloads

Data Sheet, Technical Information	2CGC0036
-----------------------------------	----------

#### Dimensions

Product Net Width	37 mm
Product Net Height	170 mm
Product Net Depth / Length	95 mm

Product Net Weight	0.3 kg
--------------------	--------

## Technical

Conventional Thermal Current ( $I_{the}$ )	630 A
Rated Impulse Withstand Voltage ( $U_{imp}$ )	12 kV
Rated Insulation Voltage ( $U_i$ )	1000 V
Rated Operational Voltage	690 V
Rated Peak Withstand Current ( $I_{pk}$ )	37 kA
Rated Short-time Withstand Current ( $I_{cw}$ )	for 1 s 34 kiloampere rms
Power Loss	at Rated Operating Conditions per Pole 44 W
Standards	IEC 61238-1
Degree of Protection	acc. to IEC 60529 IP2X

## Environmental

RoHS Status	Following EU Directive 2011/65/EU
-------------	-----------------------------------

## Certificates and Declarations (Document Number)

REACH Declaration	2CGC0049
RoHS Information	2CGC0040

## Container Information

Package Level 1 Units	30 piece
Package Level 1 Width	0.194 mm
Package Level 1 Depth / Length	0.524 mm
Package Level 1 Height	0.215 mm
Package Level 1 Gross Weight	10.71 kg
Package Level 1 EAN	7331980053797

## Classifications

ETIM 7	EC000001 - Busbar terminal
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)
E-Number (Finland)	5411223

## Categories

Low Voltage Products and Systems → Fusegear → Fuse Switch Disconnectors → Kabeldon IP-System

