



TT-TNS

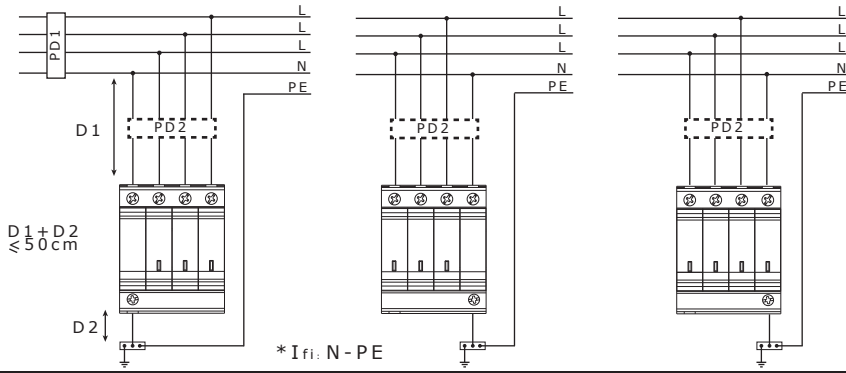


230/400V +/- 20%	OVR ... N3 XX-275 P (TS) QS	OVR ... 3N XX-275 P (TS) QS	OVR ... 4L XX-275 P (TS) QS
230/400V +/- 50%	OVR ... N3 XX-350 P (TS) QS	OVR ... 3N XX-350 P (TS) QS	OVR ... 4L XX-350 P (TS) QS
400/890V +/- 10%	OVR ... N3 XX-440 P (TS) QS	OVR ... 3N XX-440 P (TS) QS	OVR ... 4L XX-440 P (TS) QS
400/890V +/- 50%			OVR ... 4L XX-600 P (TS) QS

TNC

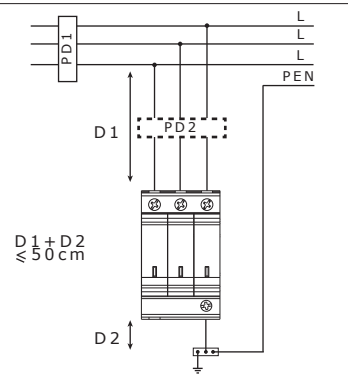

230/400V +/- 20%	OVR ... 3L XX-275 P (TS) QS
230/400V +/- 50%	OVR ... 3L XX-350 P (TS) QS
400/890V +/- 10%	OVR ... 3L XX-440 P (TS) QS
400/890V +/- 50%	

TT-TNS

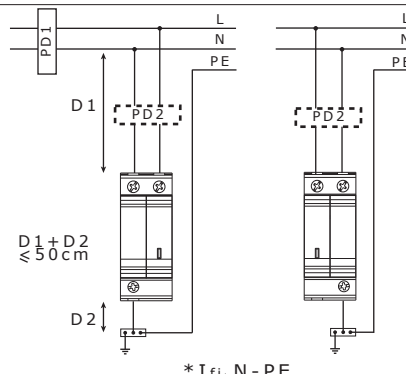

230/400V +/- 20%	OVR ... N1 XX-275 P (TS) QS	OVR ... 1N XX-275 P (TS) QS
230/400V +/- 50%	OVR ... N1 XX-350 P (TS) QS	OVR ... 1N XX-350 P (TS) QS

PD1-PD2 ⇔ $\begin{matrix} \text{PD1} > \text{PD2} & \rightarrow & \text{PD1} \leq 125\text{A} \\ \text{PD1} < \text{PD2} & \rightarrow & \text{PD2} \leq 125\text{A} \end{matrix}$

I _{CCR}	I _{MAX}	I _n (N-PE*)	I _{PE} (xN, Nx) (xL)	Type	IEC 61643-11 / EN 61643-11
100 kA a.c.	20 or 40 kA	100 A a.c.	≤ 10 μA ≤ 1000 μA	OVR T2-T3 ... : Type 2 Type 3 / Class II Class III OVR T2 ... : Type 2 / Class II	


$L > 10\text{m}$

$L \leq 10\text{m}$

-40°C +80°C

≤ 93%

IP20 Build-In

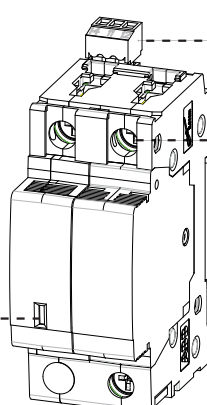

min.: 0,5 mm² / 20 AWG
max.: 1,5 mm² / 16 AWG

min.: 12 V_{ac} / 10 mA
max.: 250 V_{ac} / 1 A

2,8 Nm / 24,5 lb.in

12,5 mm / 0,5 in


min.: 2,5 mm² / 14 AWG
max.: 25 mm² / 4 AWG

min.: 2,5 mm² / 14 AWG
max.: 16 mm² / 6 AWG


Red replace

2CTB 8038 ___ R ___
2CTB 8039 ___ R ___


Parafoudre
Surge Protective Device
Überspannungsableiter
Scaricatore di sovratensioni
Pararrayo
Protecção contra sobretensões
Skydd mot överspänningar
Защита от перенапряжений
电涌保护器




- OVR T2-T3 1N 20-275 P (TS) QS
- OVR T2-T3 N1 20-275 P (TS) QS
- OVR T2-T3 1N 20-350 P (TS) QS
- OVR T2-T3 N1 20-350 P (TS) QS
- OVR T2 1N 40-275 P (TS) QS
- OVR T2 N1 40-275 P (TS) QS
- OVR T2 1N 40-350 P (TS) QS
- OVR T2 N1 40-350 P (TS) QS



- ...
- OVR T2-T3 3N 20-275 P (TS) QS
- OVR T2-T3 N3 20-275 P (TS) QS
- OVR T2-T3 3N 20-350 P (TS) QS
- OVR T2-T3 N3 20-350 P (TS) QS
- OVR T2-T3 3N 20-440 P (TS) QS
- OVR T2-T3 N3 20-440 P (TS) QS
- OVR T2 3N 40-275 P (TS) QS
- OVR T2 N3 40-275 P (TS) QS
- OVR T2 3N 40-350 P (TS) QS
- OVR T2 N3 40-350 P (TS) QS
- OVR T2 3N 40-440 P (TS) QS
- OVR T2 N3 40-440 P (TS) QS



- ...
- OVR T2-T3 3L 20-275 P (TS) QS
- OVR T2-T3 3L 20-350 P (TS) QS
- OVR T2-T3 3L 20-440 P (TS) QS
- OVR T2-T3 3L 20-600 P (TS) QS
- OVR T2 3L 40-275 P (TS) QS
- OVR T2 3L 40-350 P (TS) QS
- OVR T2 3L 40-440 P (TS) QS
- OVR T2 3L 40-600 P (TS) QS



- ...
- OVR T2-T3 4L 20-275 P (TS) QS
- OVR T2-T3 4L 20-350 P (TS) QS
- OVR T2-T3 4L 20-440 P (TS) QS
- OVR T2-T3 4L 20-600 P (TS) QS
- OVR T2 4L 40-275 P (TS) QS
- OVR T2 4L 40-350 P (TS) QS
- OVR T2 4L 40-440 P (TS) QS
- OVR T2 4L 40-600 P (TS) QS

2CTC432096M1701