

Data Sheet EKO50052

Product: Switch intermediate [7] screw

E-number NO: 14 708 64

E-number SV: 18 400 63

E-number FI: 21 046 50

EAN: 7020161500525

Packing: 5

Color: Pure white





Product description:

ELKO One intermediate switch with single rocker.

It is provided with screw terminals with the wire entrance on the side.

Its Ue rated operational voltage is 250VAC. Its le rated operational current is 16A.

By adding an impulse spring (EKO08852) the switch can easily be transformed into a push-button.

Claw-kit EKO04848 can be used for additional fixation to the flush wall-box when needed.

To be mounted in a suitable 1 to 5-gang cover frame for flush cc 60mm wall-box installation or 1 to 3-gang low or high surface mounted box for surface installation, as well as in a corner box.

The dimensions of the product are (W) 71mm x (H) 71mm x (D) 30mm.

It is made of recycled Polycarbonate (PC). The color of the product is pure white (RAL 9003) with matt surface

It reaches IP21 degrees of protection with IK07 impact strength.




One range by ELKO is covering Wiring Devices, Stand Alone Electronics and Network Connectivity functions for both flush as well as surface installation. The One range has been developed with sustainability in mind, using recycled plastic, recycled packaging material and Cradle to Cradle certified.


Modern and slim design with a smooth matt surface finish that is reflecting the light in a glowing way due to it's shape.

Dimensions

Z1 mm



Wiring diagram

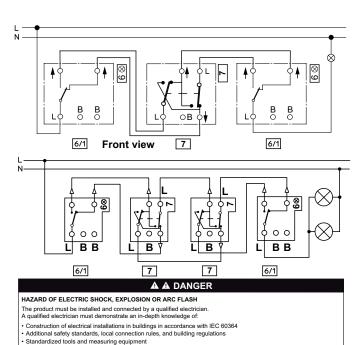

Failure to follow these instructions will result in death or serious injury

ELKO AS

Sandstuveien 68, 0680 Oslo Pb 6598 Etterstad, 0607 Oslo +47 67 79 39 00 support@elko.no www.elko.no

ELKO AB

Glasfibergatan 8, 125 45 Älvsjö Box 5115, 121 17 Johanneshov +46 8 449 27 27 info@elko.se www.elko.se ELKO Suomi Sokerilinnantie 11 C 02600 Espoo +358 10 44 66 10 www.elko.fi