


Ordering information:

ADE external clamping module (available with all ADE glands)

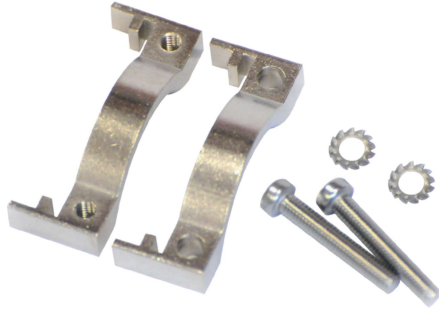

Cable range	Size	For hexagon	Width	Thickness	Cat. #
2.8 - 5.5	3	15.0	18.0	5.0	CAP810334
4.0 - 8.5	4	17.0	20.0	5.0	CAP810444
6.0 - 11.0	5	19.0	22.0	5.0	CAP810534
8.5 - 16.0	6	24.0	27.5	6.0	CAP810634
12.0 - 21.0	7	30.0	33.5	8.0	CAP810734
16.0 - 27.5	8	41.0	45.0	8.0	CAP810834
21.0 - 34.0	9	48.0	52.0	9.5	CAP810934
27.0 - 41.0	10	55.0	59.0	9.5	CAP811034
33.0 - 48.0	11	64.0	69.0	12.0	CAP811134
40.0 - 56.0	12	72.0	78.0	12.0	CAP811234
47.0 - 65.0	13	85.0	92.0	16.0	CAP811334
54.0 - 74.0	14	95.0	103.0	16.0	CAP811434
63.0 - 83.0	15	110.0	118.0	18.0	CAP811534
72.0 - 93.0	16	120.0	128.0	18.0	CAP811634

All dimensions in millimeters.
Material is nickel-plated brass with stainless steel washer and screws.



ADE-4F and 5F lead sheath washer



Gland size	Outer lead sheath		Cat. #
	Min.	Max.	
5	4.5	7.5	CAP560530
6	7.0	11.0	CAP560630
7	10.0	15.0	CAP560730
8	13.5	20.0	CAP560830
9	18.0	26.5	CAP560930
10	23.0	32.5	CAP561030
11	29.0	39.5	CAP561130
12	35.0	46.5	CAP561230
13	42.0	54.5	CAP561330
14	50.0	61.0	CAP561430
15	58.0	72.5	CAP561530
16	66.0	81.5	CAP561630

All dimensions in millimeters.
Material is natural brass.

ADE/CAP standard and DTS kits

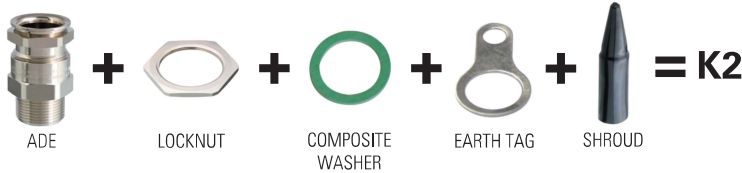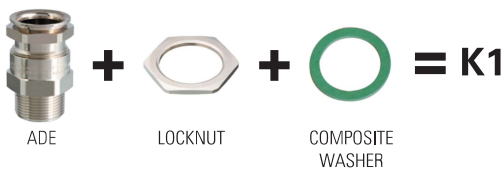

- K1, K2 and K3 kits are available for all ADE cable glands
- Deluge seal kits (DTSK1, DTSK2, DTSK3) are suitable for ADE-5F sizes 12 through 17 only
- To order kits with deluge seal, add prefix 'DTS' to catalog number before the kit number (for example: ADE5M752NPNDTSK2)

ADE-5F deluge seal



Gland size	Cat. #
12	CAP850012
13	CAP850013
14	CAP850014
15	CAP850015
16	CAP850016
17	CAP850017