



Cable gland, M32, RAL 7035, IP68_x

Part no. V-M32
Article no. 206912

Delivery program

Product range			General switchboard accessories
Accessories			Cable management
Cable entry			M32
Hole diameter		mm	32,5
Outer cable diameter		mm	13 - 21
Example of application: NYM/NYY cable, 4-core		mm ²	NYM 5 x 10
Description			Flammability classification V2 according to UL94 With lock nut and built-in strain relief
Material			Polyamide Halogen free
Surface finish			RAL 7035
Information about equipment supplied			With lock nut and built-in strain relief
Degree of Protection			IP68 up to 5 bar (30 min)

Technical data

General

Overvoltage category/pollution degree			III/3
Degree of Protection			IP68 up to 5 bar (30 min)

Contacts

Overvoltage category/pollution degree			III/3
---------------------------------------	--	--	-------

Material characteristics

Material			Polyamide Halogen free
Colour			Gray, RAL 7035
Temperature resistant			-20 °C - 100 °C, short-time up to approx. 120 °C
Chemical resistant			Resistant against : Acetone, petrol, paraffin, diesel, grease, oil, solvent for paints and varnishes
Danger of stress fracture			low
Flame retardant			Glow wire test 750 °C according to EN 60695-2-11
Flammability classification according to UL94			V2


Mechanical variables

Overvoltage category/pollution degree			III/3
---------------------------------------	--	--	-------

Approvals

Specially designed for North America			No
--------------------------------------	--	--	----

Dimensions

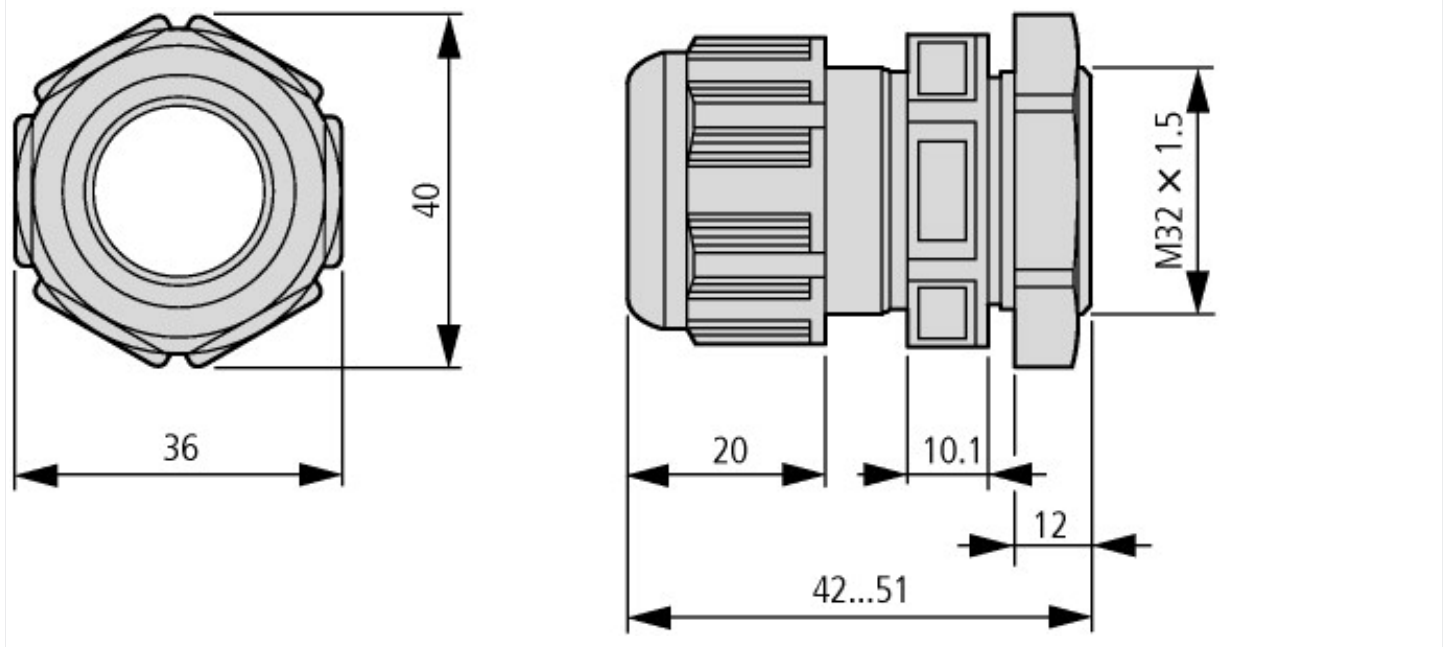

Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

http://www.moeller.net/binary/ver_techpapers/ver953en.pdf

Busbar Component Adapters for modern Industrial control panels

http://www.moeller.net/binary/ver_techpapers/ver960en.pdf