

# Isolerstoffkapslinger type : Euronorm II (Polykarbonat)

233011 (230 x 300 x 110)

230 x 300 x 110 mm (102,5 mm indre) klart lok

PCT 233011

- 2536622



## Tekniskinformasjon:


Slagfast polykarbonat med klare og grå lokk. Glatte sider.

IP 67, halogenfri, polykarbonat.  
-40°C - +120°C  
max. +80°C kontinuerlig.

## Tilleggsutstyr:


Type

EL.nr.




TM 2330

2536697



TRH 2330

2536716




TF 28037

2536729




MR 28036

2536732



TH A

2536735

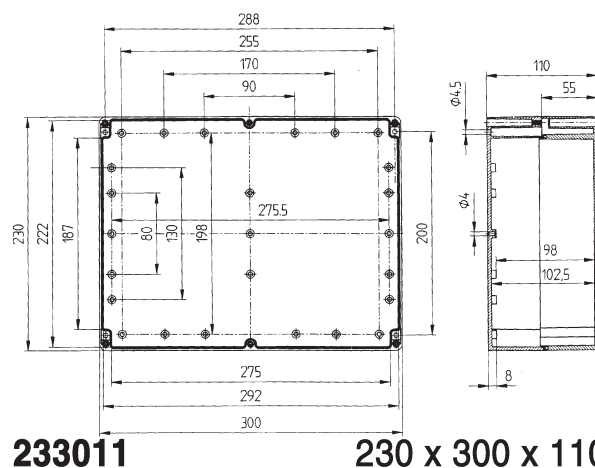

Egenskaper	Polykarbonat	Aluminium
- Tetthetsgrad	IP-65 (IEC-529)	IP-67 (IEC-529)
- Totalisolert	-	-
- Standard farge	Grå (RAL-7035)	Grå (RAL-7001)
- Pakning	Polyuretan	Polyuretan
- Temperaturbestandighet:		
- Max temperatur, kortvarig	-40°C til +120°C	-50°C til +140°C
- Max temperatur, kontinuerlig	Max +80°C	Max +80°C
- Slagfasthet	Meget høy	Meget høy
- Brennbarhet	UL94-V2	-
- Avgasser	Halogenfri	-
- Kjemiske egenskaper	Meget god (be om egen oversikt)	Meget god (be om egen oversikt)