



**Motor-protective circuit-breaker, I<sub>r</sub>= 55 - 65 A, Screw terminals,  
Terminations: IP00**


**Part no.** PKZM4-63  
**Catalog No.** 222413  
**Alternate Catalog No.** XTPR063DC1NL  
**EL-Nummer (Norway)** 4355163

**Delivery program**

|                                                                                                                                |                 |    |  |                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------|----|--|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product range                                                                                                                  |                 |    |  | PKZM4 motor protective circuit-breakers up to 65 A                                                                                                     |
| Basic function                                                                                                                 |                 |    |  | Motor protection                                                                                                                                       |
|                                                                                                                                |                 |    |  |                                                                      |
| Notes                                                                                                                          |                 |    |  | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging.                                   |
| Connection technique                                                                                                           |                 |    |  | Screw terminals                                                                                                                                        |
| Contact sequence                                                                                                               |                 |    |  |                                                                      |
| <b>Max. motor rating</b>                                                                                                       |                 |    |  |                                                                                                                                                        |
| AC-3                                                                                                                           |                 |    |  |                                                                                                                                                        |
| 220 V 230 V 240 V                                                                                                              | P               | kW |  | 18.5                                                                                                                                                   |
| 380 V 400 V 415 V                                                                                                              | P               | kW |  | 34                                                                                                                                                     |
| 440 V                                                                                                                          | P               | kW |  | 37                                                                                                                                                     |
| 500 V                                                                                                                          | P               | kW |  | 45                                                                                                                                                     |
| 660 V 690 V                                                                                                                    | P               | kW |  | 55                                                                                                                                                     |
| Rated uninterrupted current                                                                                                    | I <sub>u</sub>  | A  |  | 65                                                                                                                                                     |
| <b>Setting range</b>                                                                                                           |                 |    |  |                                                                                                                                                        |
| Overload releases                                                                                                              | I <sub>r</sub>  | A  |  | 55 - 65                                                                                                                                                |
|                                             |                 |    |  |                                                                                                                                                        |
| short-circuit release                                                                                                          |                 |    |  |                                                                                                                                                        |
|                                             |                 |    |  |                                                                                                                                                        |
| max.                                                                                                                           | I <sub>rm</sub> | A  |  | 1008                                                                                                                                                   |
| Phase-failure sensitivity                                                                                                      |                 |    |  | IEC/EN 60947-4-1, VDE 0660 Part 102                                                                                                                    |
| Explosion protection (according to ATEX 94/9/EC)                                                                               |                 |    |  |  PTB 10, ATEX 3012, Ex II(2) G<br>Observe manual MN03402002Z-DE/EN. |
| <b>Notes</b> Overload trigger: tripping class 10 A<br>Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height. |                 |    |  |                                                                                                                                                        |

**Technical data**

|                     |  |    |  |                                                                                |
|---------------------|--|----|--|--------------------------------------------------------------------------------|
| <b>General</b>      |  |    |  |                                                                                |
| Standards           |  |    |  | IEC/EN 60947, VDE 0660, UL, CSA                                                |
| Climatic proofing   |  |    |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature |  |    |  |                                                                                |
| Storage             |  | °C |  | - 40 - 80                                                                      |
| Open                |  | °C |  | -25 - +55                                                                      |
| Enclosed            |  | °C |  | - 25 - 40                                                                      |

|                                                                           |  |                 |                                                                                   |
|---------------------------------------------------------------------------|--|-----------------|-----------------------------------------------------------------------------------|
| Mounting position                                                         |  |                 |  |
| Direction of incoming supply                                              |  |                 | as required                                                                       |
| Degree of protection                                                      |  |                 |                                                                                   |
| Device                                                                    |  |                 | IP20                                                                              |
| Terminations                                                              |  |                 | IP00                                                                              |
| Protection against direct contact when actuated from front (EN 50274)     |  |                 | Finger and back-of-hand proof                                                     |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 |  | g               | 15                                                                                |
| Altitude                                                                  |  | m               | Max. 2000                                                                         |
| Terminal capacity main cable                                              |  |                 |                                                                                   |
| Screw terminals                                                           |  |                 |                                                                                   |
| Solid                                                                     |  | mm <sup>2</sup> | 1 x (1 - 50)<br>2 x (1 - 35)                                                      |
| Flexible with ferrule to DIN 46228                                        |  | mm <sup>2</sup> | 1 x (1 - 35)<br>2 x (1 - 35)                                                      |
| Solid or stranded                                                         |  | AWG             | 14 - 2                                                                            |
| Stripping length                                                          |  | mm              | 14                                                                                |
| Specified tightening torque for terminal screws                           |  |                 |                                                                                   |
| Main cable                                                                |  | Nm              | 3.3                                                                               |

### Main conducting paths

|                                                         |             |               |                           |
|---------------------------------------------------------|-------------|---------------|---------------------------|
| Rated impulse withstand voltage                         | $U_{imp}$   | V AC          | 6000                      |
| Overvoltage category/pollution degree                   |             |               | III/3                     |
| Rated operational voltage                               | $U_e$       | V AC          | 690                       |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A             | 65                        |
| Rated frequency                                         | f           | Hz            | 40 - 60                   |
| Current heat loss (3 pole at operating temperature)     |             | W             | 33,5                      |
| Impedance per pole                                      |             | mΩ            | 2                         |
| Lifespan, mechanical                                    | Operations  | $\times 10^6$ | 0.03                      |
| Lifespan, electrical (AC-3 at 400 V)                    |             |               |                           |
| Lifespan, electrical                                    | Operations  | $\times 10^6$ | 0.03                      |
| Max. operating frequency                                |             | Ops/h         | 40                        |
| Short-circuit rating                                    |             |               |                           |
| DC                                                      |             |               |                           |
| Short-circuit rating                                    |             | kA            | 60                        |
| Notes                                                   |             |               | up to 250 V               |
| Motor switching capacity                                |             |               |                           |
| AC-3 (up to 690V)                                       |             | A             | 65                        |
| DC-5 (up to 250V)                                       |             | A             | 63 (3 contacts in series) |

### Trip blocks

|                                                         |  |              |                                        |
|---------------------------------------------------------|--|--------------|----------------------------------------|
| Temperature compensation                                |  |              |                                        |
| to IEC/EN 60947, VDE 0660                               |  | °C           | - 5 ... 40                             |
| Operating range                                         |  | °C           | - 25 ... 55                            |
| Temperature compensation residual error for $T > 40$ °C |  |              | $\leq 0.25$ %/K                        |
| Setting range of overload releases                      |  | $\times I_u$ | 0.6 - 1                                |
| short-circuit release                                   |  |              | Basic device, fixed: $15.5 \times I_u$ |
| Short-circuit release tolerance                         |  |              | $\pm 20$ %                             |
| Phase-failure sensitivity                               |  |              | IEC/EN 60947-4-1, VDE 0660 Part 102    |

### Rating data for approved types

|                      |  |    |    |
|----------------------|--|----|----|
| Switching capacity   |  |    |    |
| Maximum motor rating |  |    |    |
| Three-phase          |  |    |    |
| 460 V<br>480 V       |  | HP | 40 |
| 575 V<br>600 V       |  | HP | 50 |

|                                                |      |               |
|------------------------------------------------|------|---------------|
| Short Circuit Current Rating, type E           | SCCR |               |
| 240 V                                          | kA   | 50            |
| 480 Y / 277 V                                  | kA   | 50            |
| Accessories required                           |      | BK50/3-PKZ4-E |
| Short Circuit Current Rating, group protection | SCCR |               |
| 600 V High Fault                               |      |               |
| SCCR (fuse)                                    | kA   | 42            |
| max. Fuse                                      | A    | 600           |
| SCCR (CB)                                      | kA   | 42            |
| max. CB                                        | A    | 600           |

## Design verification as per IEC/EN 61439

|                                                                                                                        |            |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |            |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | $I_n$      | A  | 65                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | $P_{vid}$  | W  | 11.17                                                                                                                            |
| Equipment heat dissipation, current-dependent                                                                          | $P_{vid}$  | W  | 33.5                                                                                                                             |
| Static heat dissipation, non-current-dependent                                                                         | $P_{vs}$   | W  | 0                                                                                                                                |
| Heat dissipation capacity                                                                                              | $P_{diss}$ | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |            | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |            | °C | 55                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |            |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |            |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |            |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |            |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |            |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|                                                                                                                                                                                                       |   |           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----------|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)                                                                                                            |   |           |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016]) |   |           |
| Overload release current setting                                                                                                                                                                      | A | 55 - 65   |
| Adjustment range undelayed short-circuit release                                                                                                                                                      | A | 977 - 977 |
| With thermal protection                                                                                                                                                                               |   | Yes       |

|                                                                    |    |                                          |
|--------------------------------------------------------------------|----|------------------------------------------|
| Phase failure sensitive                                            |    | Yes                                      |
| Switch off technique                                               |    | Thermomagnetic                           |
| Rated operating voltage                                            | V  | 690 - 690                                |
| Rated permanent current I <sub>u</sub>                             | A  | 65                                       |
| Rated operation power at AC-3, 230 V                               | kW | 18.5                                     |
| Rated operation power at AC-3, 400 V                               | kW | 34                                       |
| Type of electrical connection of main circuit                      |    | Screw connection                         |
| Type of control element                                            |    | Turn button                              |
| Device construction                                                |    | Built-in device fixed built-in technique |
| With integrated auxiliary switch                                   |    | No                                       |
| With integrated under voltage release                              |    | No                                       |
| Number of poles                                                    |    | 3                                        |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC | kA | 50                                       |
| Degree of protection (IP)                                          |    | IP20                                     |
| Height                                                             | mm | 140                                      |
| Width                                                              | mm | 55                                       |
| Depth                                                              | mm | 160                                      |

## Approvals

|                                      |  |                                                                                          |
|--------------------------------------|--|------------------------------------------------------------------------------------------|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking                 |
| UL File No.                          |  | E36332                                                                                   |
| UL Category Control No.              |  | NLRV                                                                                     |
| CSA File No.                         |  | 165628                                                                                   |
| CSA Class No.                        |  | 3211-05                                                                                  |
| North America Certification          |  | UL listed, CSA certified                                                                 |
| Specially designed for North America |  | No                                                                                       |
| Suitable for                         |  | Branch circuit: Manual type E if used with terminal, or suitable for group installations |

## Characteristics



- 1: Standard auxiliary contact
- 2: Trip-indicating auxiliary contact
- 3: Shunt releases, undervoltage releases



Tripping characteristics motor-protective circuit breaker PKZM4-...

- 1: Minimum level, 3-phase
- 2: Maximum level, 3-phase
- 3: Minimum marker, 2-phase
- 4: Highest marker, 2-phase







Let-through current



① 1 half-cycle  
Let-through energy



## Dimensions

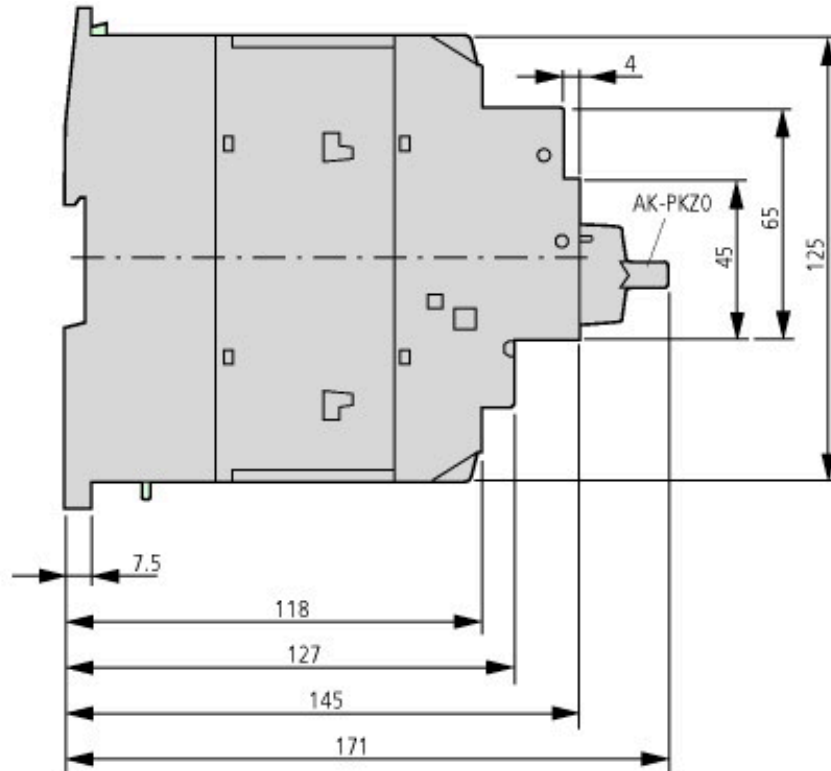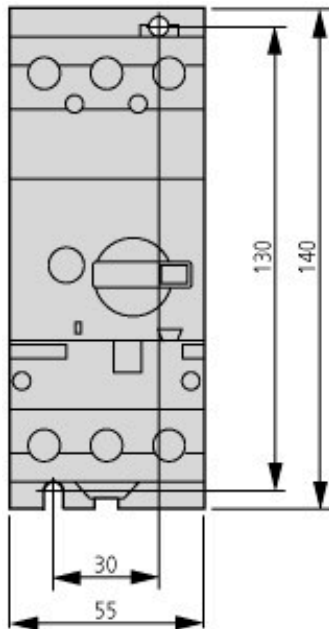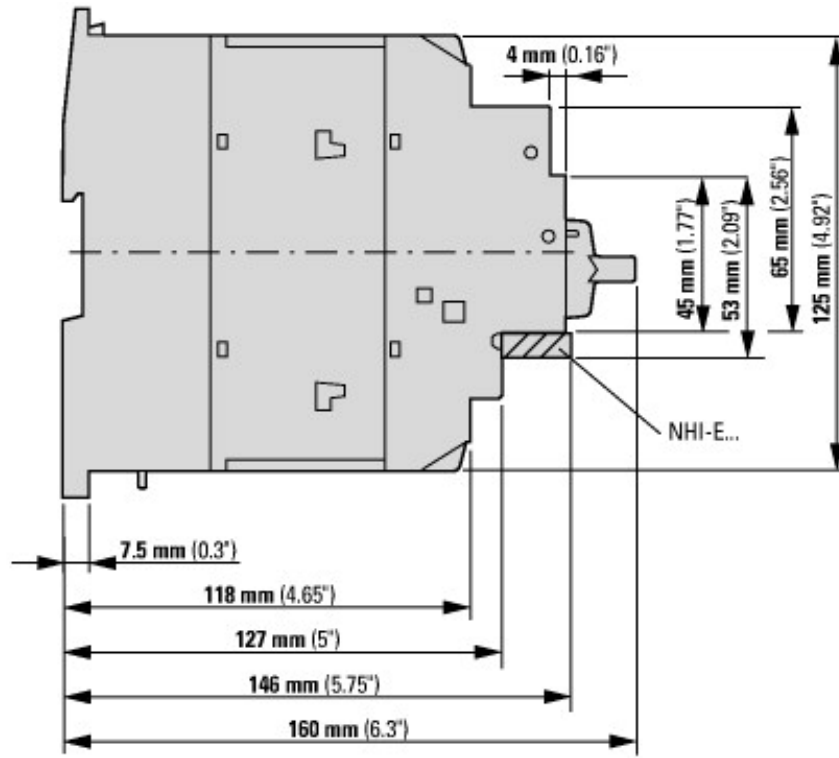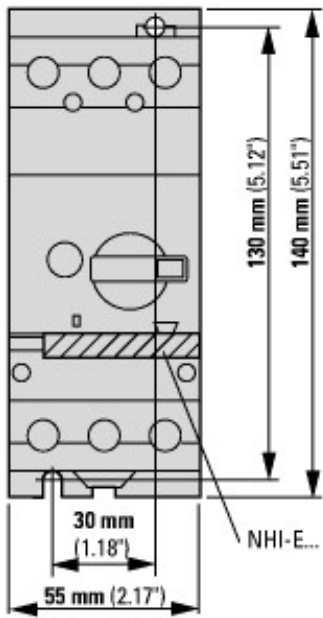

PKZM4-... +AK-PKZ0