

STI Euro Stopper®



KEY FEATURES

General Information

- Protective cover helps prevent malicious or accidental false fire alarms.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electromechanical and electronic components).

Design

- Prevents false alarms, without hindering legitimate operation of a manual call point in the event of an emergency.

Construction

- Tough polycarbonate housing can withstand the severest of knocks.

Installation

- A simple 4 fixing installation can retrofit over existing device.
- Can accommodate flush or surface mounted applications.
- Polycarbonate tested -40°C (-40°F) to 49°C (120°F).

Electronics

- Available with or without a 96 dB integral sounder, powered by a 3V lithium battery.
- Optional 12-24 VDC powered units.

Options

- Break seal option for added security.
- Available in a range of colours.
- Custom labelling available.

Remote Wireless Monitoring of Call Points

- You can now be alerted to any vandalism or authorised use of a manual call point in the event of an emergency. Upon activation, the Euro Stopper (when fitted with an optional transmitter and sounder) will emit a localised alarm as well as triggering the 4-Channel (STI 34104) or 8-Channel Receiver (STI 34108), providing a visual and audible indication, remotely.

PRODUCT OVERVIEW

Protective cover helps prevent malicious or accidental false fire alarms. This newly styled protective cover further enhances the Stopper® range, which has helped to prevent false fire alarms around the world for decades, without restricting legitimate operation of devices such as fire alarm break glass call points. Sleeker and less intrusive in its design, this compact device incorporates the existing features of the Stopper but is now visibly smaller. The new hinge arrangement increases the durability, strength and quality of this essential protective cover. Ideal for schools, colleges, hospitals, nursing homes, hotels and all public buildings where there is a history or a threat of false fire alarms.

HOW IT WORKS

The Euro Stopper consists of a clear, tamperproof, tough polycarbonate cover and frame that retrofits over the break glass call point. When lifted to gain access to the break glass, its optional battery powered integral sounder emits an ear piercing 96 dB (at 1 metre). Immediate attention is drawn to the area and the prankster will either run or be caught.



For more information, call +44 (0)1527 520 999 or visit www.sti-europe.com



Safety Technology International (Europe) Ltd

STI Euro Stopper®

Dimensions and Technical Information

BUILD YOUR OWN MODEL

STI-1 5

Cover Options:

5 = Euro Stopper Cover

Mounting Options:

0 = Flush Mount
C = 32mm Surface Spacer
D = 50mm Surface Spacer

Hood/ Sounder/ Wireless Options:

0 = No Label Hood
1 = Label Hood without Sounder*
2 = Label Hood with Sounder*
3 = Label Hood with Sounder/Relay*
4 = Label Hood with Sounder/Wireless*
5 = Label Hood with Sounder/Wireless/Relay*

* All colours except when option NC is selected

Special Electronics:

0 = None

Hood/ Sounder Colour & Label Options:

Fire Label
NY = Yellow
FR = Red - Fire Label
NE = Orange

Emergency Exit Label
EG = Green - Emergency Exit Label

No Label
NK = Black
NB = Blue
NC = Clear
NG = Green
NR = Red
NW = White

Free Custom Label**
CK = Black**
CB = Blue**
CG = Green**
CR = Red**
CW = White**
CY = Yellow**
CE = Orange**

**Must provide custom label wording (2 lines, 20 characters per line including spaces)

MODELS AVAILABLE

STI 15010 FR Euro Stopper flush mounted without integral sounder

STI 15C10 FR Euro Stopper surface mounted without integral sounder (includes 32mm spacer)

STI 15020 FR Euro Stopper flush mounted with integral sounder

STI 15C20 FR Euro Stopper surface mounted with integral sounder (includes 32mm spacer)

STI 15040 FR Wireless Euro Stopper flush mounted with integral sounder

STI 15C40 FR Wireless Euro Stopper surface mounted with integral sounder (includes 32mm spacer)

Accessories:

STI 6506 32mm spacer (supplied with STI 15C10, STI 15C20 & STI 15C40)

STI 6507 50mm spacer

STI/BS Break seals (quantity 10)

DC1224 Wiring harness for remote power

E009 Service pin


Options:

COLOURS AVAILABLE Black, blue, green, red, white, yellow or orange (to specify colour refer to Build Your Own Model)

SECURITY Break seal facility available, order STI/BS

NB:

The Euro Stopper is supplied in red with operating instructions: 'IN CASE OF FIRE - LIFT COVER BREAK GLASS'. Alternative and custom markings available.

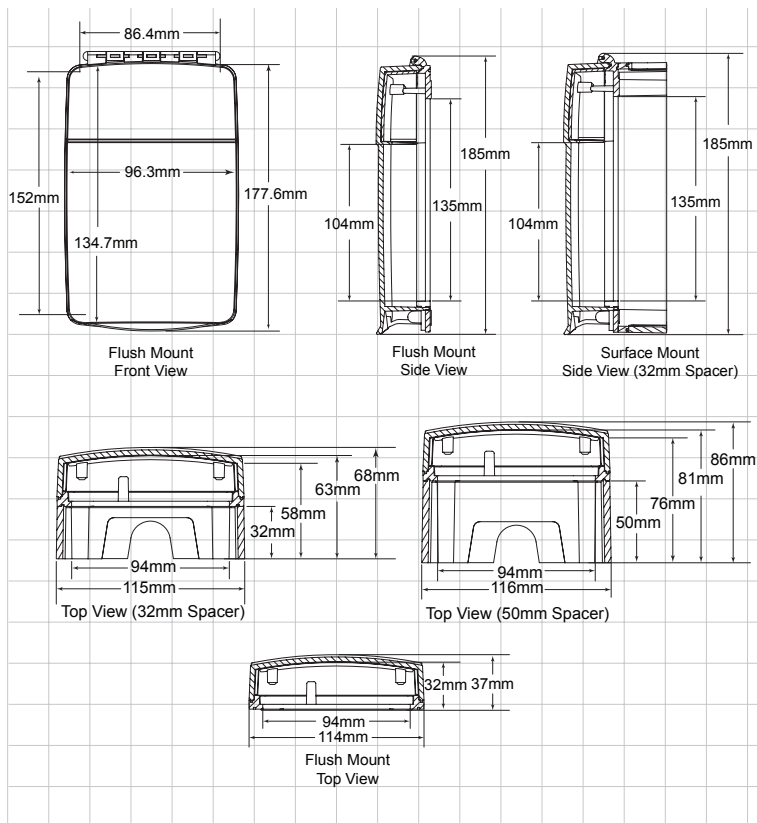

Safety Technology International (Europe) Ltd

UK Office

Unit 49G Pipers Road
Park Farm Industrial Estate
Redditch, Worcestershire
B98 0HU, England

Tel: +44 (0)1527 520 999
Fax: +44 (0)1527 501 999
info@sti-europe.com
www.sti-europe.com

USA Head Office

2306 Airport Road
Waterford, Michigan
48327 - 1209

Tel: +248-673-9898
Fax: +248-673-1246
Toll-free: 0800-888-4STI
info@sti-usa.com
www.sti-usa.com