


## IP23 LED Batten

IP23 LED Batten with lens optic for batwing light distribution, UGR <22 for indoor applications..... Lifetime: 100.000hrs@L70 , Impact strength: IK07. Ambient temperature: -20 ~ +40°C. Suitable for surface mounting or catenary suspension. Throughwired:equipped with 5-pole push-terminal, toolfree installation. Dimensions: 1745 x 85 x 52 mm, weight: 2.95 kg

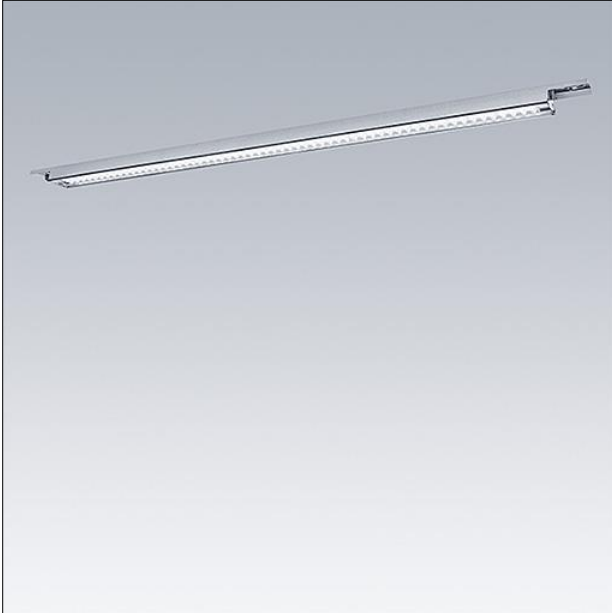

TE\_BALDER\_F\_persp.jpg

Light Distribution

STD - standard