

92945456 IS 12L70 730 ENR M C95 BP 3550 ZU CL2 WS8 T60F GY

| | | | | | | | | | | | |
|----------------|--|--|--|--|--|--|--|--|--|-------|---------------------------|
| ISO 9223 C5 | | | | | | | | | | 650°C | T _a -35 +45 |
|----------------|--|--|--|--|--|--|--|--|--|-------|---------------------------|

Isaro

A discrete and flexible road and street lantern with durable high performance. Programmable LED driver, BPxyz: Autonomous bi-power reduction (x: hours before midnight, y: hours after midnight, zz: reduction (%)), driving 12 LEDs at 700mA. Body: extra small size, die-cast aluminium (EN AC-44300), powder coated textured light grey 150 (close to RAL9006). Shaft: light grey 150 (close to RAL9006). Cover: glass. Fixings: stainless steel with anti-galvanic treatment. Extra Narrow Road optic, with Colour Rendering Index min.: 70, Correlated colour temperature: 3000 Kelvin LEDs supplied. Class II electrical, Impact strength: IK08, IP66, T_a max.: 45°C. Supplied with Ø60mm spigot adaptor pre-fitted for post-top, 5° tilt. Pre-wired with 8m, 1.5mm² H07RN-F cable. Fitted with LED optic lining. Equipped with 1 Zhaga socket.


Dimensions: 508 x 180 x 157 mm
 Luminaire input power: 27 W
 Luminaire luminous flux: 3565 lm
 Luminaire efficacy: 132 lm/W
 Weight: 3.76 kg
 Scx: 0.028 m²



TLG_ISLC_F_XS_ZU_SR.jpg



TLG_ISLC_M_XSMTP60.wmf

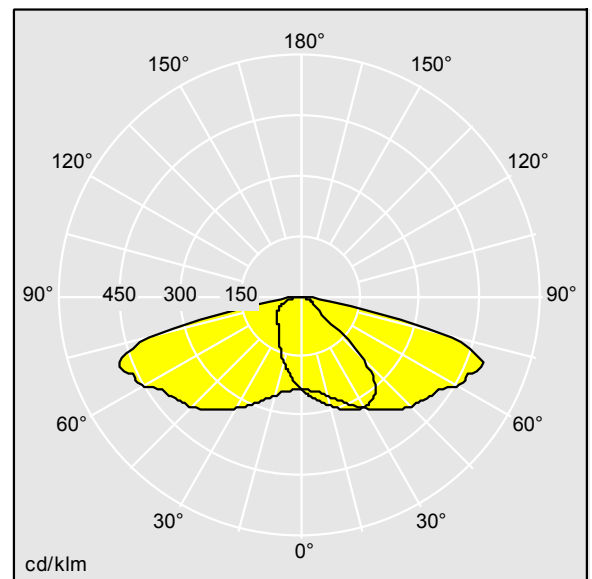

Light Source: LED
 Luminaire luminous flux*: 3565 lm
 Luminaire efficacy*: 132 lm/W
 Colour Rendering Index min.: 70
 Ballast: 1 x 87500877 LCO 40/200-1050/64 NF C
 ADV3

Correlated colour temperature: 3000 Kelvin
 Chromaticity tolerance (initial MacAdam): 5
 Rated useful life (B10)*: L90 100000h at 25°C
 Luminaire input power*: 27 W Power factor = 0.97
 Dimming: PROG
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class D.