


Technical data sheet

Wiring trunking VF 20, flexible

Art.-Nr. 6132604

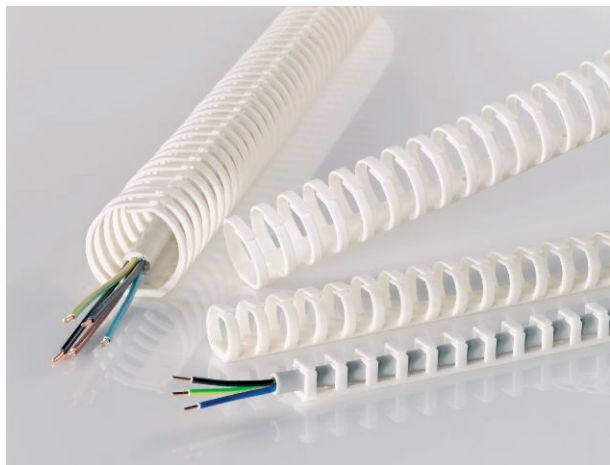

Flexible wiring trunking for horizontal and vertical routing in the switchgear cabinet.

PP Polypropylene

Additional product text, instruction	Direct mounting on the wall via the integrated base perforation (with double-sided adhesive tape as mounting aid). Flame-retardant and self-extinguishing after removal of an active flame. The retainers in the trunking base can be broken out without tools.
Product text, standards	Tested to DIN EN 50085-2-3.
Product text, scope of delivery	Base and cover in set.

Master data

Item no.	6132604
Type	VF 20KB rws
Description 1	Slotted cable trunking system
Description 2	VF flex 20 mm adh. 9010
Colour	Pure white
RAL number	9010
Material	Polypropylene
Material symbol	PP
Smallest sales unit	2,00 Piece
Weight	2,95 kg/100 pc.

Technical data

Length	500,00 mm
Width	24,00 mm
Height	24,00 mm
Diameter	20,00 mm
Side wall version	Slotted
Fastening type	Self-adhesive and base perforation
Flexible	<input checked="" type="checkbox"/>
Creepage current-resistant	<input checked="" type="checkbox"/>
With cover	<input type="checkbox"/>
Usable cross-section	360,00 mm ²
Halogen-free	<input checked="" type="checkbox"/>
Slot spacing	13,00 mm
Slot width	8,00 mm
Self-extinguishing	<input checked="" type="checkbox"/>