

Photoelectric lighting controller

# NightmatIQ

white  
EAN 4007841 066147  
Article number 066147



twilight switch



1 - 75 lux



IP54

1000 W

1000 W max. (LED-ready)



plastic free packaging



energy saving

3 years

manufacturer's warranty



CE

## Function description

## Technical specifications

Dimensions (L x W x H)	38 x 95 x 95 mm	Ambient temperature	-20 – 40 °C
With motion detector	No	Material	Plastic
Manufacturer's Warranty	3 years	Mains power supply	220 – 240 V / 50 – 60 Hz
Settings via	Potentiometers	Switching output 1, resistive	1000 W
Version	white	Fluorescent lamps, electronic ballast	250 W
PU1, EAN	4007841066147	Power consumption	0,7 W
Type	Photo-cell controller	Technology, sensors	Light sensor
Application, place	Outdoors	Mounting height	1,80 – 4,00 m
Application, room	outdoors, front door, courtyard & driveway, Indoors, all round the building, terrace / balcony	Mounting height max.	4,00 m
Colour	white	Optimum mounting height	2 m
Installation site	wall	Twilight setting	1 – 75 lx
Installation	Surface wiring, Wall	Interconnection	Yes
IP-rating	IP54	Interconnection via	Cable

<https://www.steinel.de>

Subject to technical modifications

06.2023 Page 1 from 2

Photoelectric lighting controller

# NightmatIQ


white

EAN 4007841 066147

Article number 066147



## Dimension Drawing

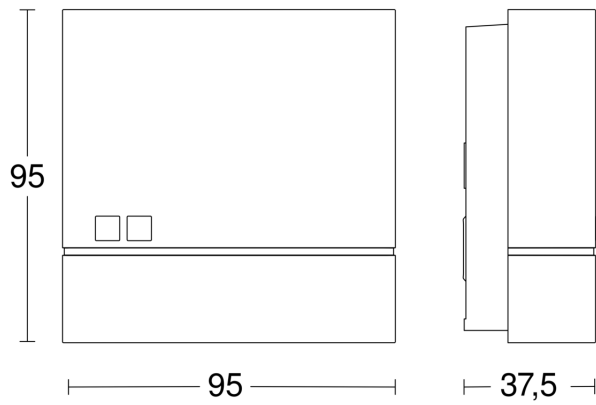

## Circuit diagram

