

Produktdatablad

for



10 045 76

12 fiber, 9/125 OS2 inne/ute







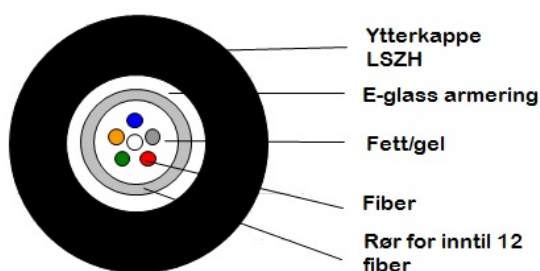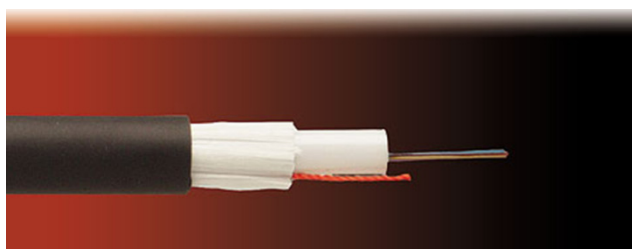

EAN nr: 7055530045666

Produktgruppe: FIBERKABEL

Bilde



Nærmere beskrivelse

-  Singel modus (SM) fiberkabel for bruk både inne og ute
-  Optisk kvalitet ihht fiberklasse OS2
-  Diam. kjerne: 9µm
-  Diam. kappe(cladding): 125µm
-  Diam. sekundærbelegg (løs kledning): 250 µm
-  Armeringsfiber: E-glass (egenskaper som kevlar, men med gnagerbeskyttelse)
-  Fiberglass G.652D. Produsent Corning.
-  Ytterkappe sort termoplast, LSZH

Tilsvarende varianter:

Ant. fiber	El.nr	Ytre diam	Min.bøy rad
4	10 045 74	6,0mm	60mm
8	10 045 75	6,0mm	60mm
12	10 045 76	6,0mm	60mm
24	10 04577	6,0mm	60mm
48	10 045 78	10,5mm	105mm
96	10 045 79	14,5mm	145mm

Environmental and mechanical tests according to EN 187000 and IEC 60794.
 Fire tests according to: UNE-EN 50266 (IEC 60332-3) / UNE-EN 50267-2-1/-2 (IEC 60754-2-1/-2) / UNE-EN 61034-2 (IEC 61034-2).
 Fibre standard colour coding: red – green – grey – yellow – blue – natural – white – brown – violet – orange – pink – black.
 LSZH – Halogen free, low smoke and flame retardant thermoplastic compound.