POWERFLEX® RV-K

Industrial flexible cable for power transmission.

ACCORDING TO: IEC 60502-1 / UNE 21123-2



E_{ca}

APPLICATION

Powerflex® RV-K cable is suitable for all types of low voltage industrial-type connections, in urban grids, building installations, etc.
Its high flexibility makes the installation process substantially easier and, as a result, is particularly suitable for use in difficult layouts. It can be buried or installed in a tube as well as outdoors without requiring additional protection.
This cable can withstand damp conditions including total submersion in water (AD8).

CONSTRUCTION

Conductor
Electrolytic annealed copper, class 5 (flexible) according to EN 60228 and IEC 60228.

Insulation
Cross-linked polyethylene, type DIX-3 according to HD 603-1 and type XLPE according to IEC 60502-1.
The standard identification of insulated conductors according to HD 308 is the following:

1 x	Natural
2 x	Blue + Brown
3 G	Blue + Brown + Green/Yellow
3 x	Brown + Black + Grey
3 x + 1 x	Brown + Black + Grey + Blue (reduced cross-section)
4 G	Brown + Black + Grey + Green/Yellow
4 x	Brown + Black + Grey + Blue
5 G	Brown + Black + Grey + Blue + Green/Yellow
6 or more	Black numbered + Green/Yellow

Outer sheath
Flexible PVC, type DMV-18 according to HD 603-1 and type ST2 according to IEC 60502-1.
Black colour.
Other colors are available on request.

CHARACTERISTICS

Electrical performance
Low voltage: 0,6/1 kV.

Thermal performance
Maximum conductor temperature: 90°C.
Maximum short-circuit temperature: 250°C (max. 5 s).
Minimum service temperature: -40°C (fixed and protected installations).
Minimum installation and handling temperature: 0°C (on cable surface).

Fire performance
Flame non-propagation according to EN 60332-1 / IEC 60332-1.
Reaction to fire CPR: E_{ca} according to EN 50575.
Reduced halogen emission. Chlorine < 15%.

Mechanical performance
Minimum bending radius during installation: 5x cable diameter (diameter cable ≤ 50 mm).
Minimum bending radius during installation: 6x cable diameter (diameter cable > 50 mm).
Impact resistance: AG2 Medium severity.

Environmental performance
Chemical & Oil resistance: Good.
UV Resistant according to UNE 211605.
Water resistance: AD8 Submersion.

Installation conditions
Open Air.
Buried.
In conduit.
In tray.

STANDARDS / COMPLIANCE

According to
IEC 60502-1 / UNE 21123-2

Standards and approvals
AENOR / BUREAU VERITAS /RETIE / KEMA-KEUR /RoHS / CE


CPR (Construction Products Regulation)
E_{ca}

sales@topcable.com | www.topcable.com
© 2024 Top Cable – Version 28 - 19.11.2024 | Issued by IML

Top Cable reserves the right to carry out any modification to the data sheets whatsoever without giving previous notice. All renders, specifications and particulars of weights, size and dimensions contained in this documentation is indicative only and shall not be binding on Top Cable.

POWERFLEX®
RV-K

DIMENSIONS & ADMISSIBLE INTENSITIES

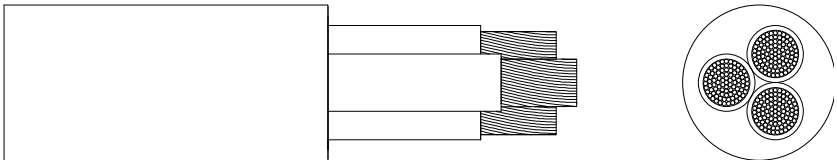

Cross-section (mm^2)	Diameter (mm)	Weight (kg/km)	Open air (A) [1]	Buried (A) [2]	Voltage drop (V/A · km) [3]
1 x 1,5	5,7	45	28	27	33,9
1 x 2,5	6,2	55	39	35	20,3
1 x 4	6,7	70	53	46	12,6
1 x 6	7,3	90	68	58	8,41
1 x 10	8,2	135	93	77	4,87
1 x 16	8,8	185	124	100	3,08
1 x 25	10,1	270	161	129	1,98
1 x 35	11,2	360	200	155	1,41
1 x 50	13,0	500	242	183	0,984
1 x 70	14,8	690	310	225	0,693
1 x 95	16,8	895	377	270	0,525
1 x 120	18,7	1.130	437	306	0,410
1 x 150	20,9	1.405	504	343	0,328
1 x 185	23,0	1.650	575	387	0,270
1 x 240	25,7	2.210	679	448	0,204
1 x 300	28,5	2.745	783	502	0,163
1 x 400	32,6	3.670	940	592	0,123
1 x 500	36,9	4.625	1.083	670	0,097
1 x 630	43,1	6.270	1.254	762	0,073
1 x 800	48,0	8.155	1.454	870	0,056
1 x 1000	59,9	10.410	1.670	988	0,044
2 x 1,5	8,1	90	26	27	33,9
2 x 2,5	9,1	120	36	35	20,3
2 x 4	10,2	165	49	46	12,6
2 x 6	11,2	215	63	58	8,41
2 x 10	13,1	320	86	77	4,87
2 x 16	14,9	450	115	100	3,08
2 x 25	19,5	750	149	129	1,98
2 x 35	21,6	985	185	155	1,41
2 x 50	25,3	1.370	225	183	0,984
2 x 70	29,4	1.890	289	225	0,693
2 x 95	33,1	2.440	352	270	0,525
3 G 1,5	8,9	110	26	27	33,9
3 G 2,5	9,8	145	36	35	20,3
3 G 4	11,0	200	49	46	12,6
3 G 6	12,1	265	63	58	8,41
3 G 10	14,3	405	86	77	4,87
3 x 16	16,4	595	115	100	3,08
3 x 25	20,3	945	149	129	1,98
3 x 35	23,0	1.270	185	155	1,41
3 x 50	26,7	1.760	225	183	0,984
3 x 70	30,0	2.415	289	225	0,693
3 x 95	34,7	3.155	352	270	0,525

© 2024 Top Cable – Version 28 - 19.11.2024 | Issued by IML

Top Cable reserves the right to carry out any modification to the data sheets whatsoever without giving previous notice. All renders, specifications and particulars of weights, size and dimensions contained in this documentation is indicative only and shall not be binding on Top Cable.

POWERFLEX®
RV-K

Cross-section (mm^2)	Diameter (mm)	Weight (kg/km)	Open air (A) [1]	Buried (A) [2]	Voltage drop (V/A · km) [3]
3 x 120	38,7	3.995	410	306	0,41
3 x 150	44,7	5.130	473	343	0,328
3 x 185	48,9	6.115	542	387	0,270
3 x 240	54,1	7.875	641	448	0,204
3 x 300	60,7	9.840	741	502	0,163
3 x 400	72,1	13.435	886	592	0,123
3x16+1x10	17,6	700	115	100	3,08
3x25+1x16	21,3	1.095	149	129	1,98
3x35+1x16	23,7	1.405	185	155	1,41
3x50+1x25	27,9	1.980	225	183	0,984
3x70+1x35	32,8	2.770	289	225	0,693
3x95+1x50	36,8	3.610	352	270	0,525
3x120+1x70	40,3	4.605	410	306	0,410
3x150+1x70	45,6	5.640	473	343	0,328
3x185+1x95	51,0	6.915	542	387	0,270
3x240+1x120	58,3	9.000	641	448	0,204
3x1x240	55,3	6.690	597	336	0,204
4 G 1,5	9,7	130	26	27	33,9
4 G 2,5	10,7	175	36	35	20,3
4 G 4	12,0	245	49	46	12,6
4 G 6	13,4	330	63	58	8,41
4 G 10	15,7	505	86	77	4,87
4 x 16	18,2	750	115	100	3,08
4 x 25	21,9	1.170	149	129	1,98
4 x 35	24,6	1.575	185	155	1,41
4 x 50	29,4	2.210	225	183	0,984
4 x 70	33,9	3.080	289	225	0,693
4 x 95	38,6	4.000	352	270	0,525
4 x 120	43,9	5.115	410	306	0,410
4 x 150	49,8	6.575	473	343	0,328
4 x 185	54,3	7.785	542	387	0,270
4 x 240	64.5	10.695	641	448	0,204
4 x 300	67,6	12.550	741	502	0,163
5 G 1,5	10,4	155	26	27	33,9
5 G 2,5	11,6	215	36	35	20,3
5 G 4	13,2	300	49	46	12,6
5 G 6	14,7	405	63	58	8,41
5 G 10	17,1	625	86	77	4,87
5 G 16	20,2	935	115	100	3,08
5 G 25	24,5	1.445	149	129	1,98
5 G 35	27,7	1.955	185	155	1,41
5 G 50	33,0	2.730	225	183	0,984
5 G 70	38,2	3.805	289	225	0,693
5 G 95	43,1	4.950	352	270	0,525
5 G 120	48,7	6.285	410	306	0,410
5 G 150	55,6	8.145	473	343	0,328
5 G 185	60,6	9.560	542	387	0,270
5 G 240	71,8	13.210	641	448	0,204
7 G 1,5	11,2	190	26	27	33,9
7 G 2,5	12,4	265	36	35	20,3
10 G 1,5	13,2	260	26	27	33,9

© 2024 Top Cable – Version 28 - 19.11.2024 | Issued by IML

Top Cable reserves the right to carry out any modification to the data sheets whatsoever without giving previous notice. All renders, specifications and particulars of weights, size and dimensions contained in this documentation is indicative only and shall not be binding on Top Cable.

POWERFLEX®
RV-K

Cross-section (mm^2)	Diameter (mm)	Weight (kg/km)	Open air (A) [1]	Buried (A) [2]	Voltage drop (V/A · km) [3]
10 G 2,5	16,3	380	36	35	20,3
12 G 1,5	14,2	295	26	27	33,9
12 G 2,5	15,7	420	36	35	20,3
14 G 1,5	14,9	315	26	27	33,9
24 G 1,5	20,4	550	26	27	33,9

[1] Reference method F for single-core and method E for multicore cables according to IEC 60364-5-52 in open air at 30°C ambient temperature.
[2] Reference method D2 according to IEC 60364-5-52. Directly buried at 0,7 m depth with soil thermal resistivity of 2,5 K·m/W and 20°C of ground temperature.
[3] At maximum conductor temperature and $\cos\varphi=1$.
In all cases are supposed a single-phase circuit.

© 2024 Top Cable – Version 28 - 19.11.2024 | Issued by IML

Top Cable reserves the right to carry out any modification to the data sheets whatsoever without giving previous notice. All renders, specifications and particulars of weights, size and dimensions contained in this documentation is indicative only and shall not be binding on Top Cable.

POWERFLEX® RV-K

SHORT-CIRCUIT CURRENT-CARRYING CAPACITIES

Time (s)	0,1	0,2	0,3	0,5	1	1,5	2	2,5	3
A/mm²	452	320	261	202	143	117	101	90	83

CORRECTION FACTORS FOR AIR TEMPERATURE

Air T. (°C)	20	25	30	35	40	45	50	55	60
Factor	1,08	1,04	1	0,96	0,91	0,87	0,82	0,76	0,71

CORRECTION FACTORS FOR GROUND TEMPERATURE

Ground T. (°C)	10	15	20	25	30	35	40	45	50
Factor	1,07	1,04	1	0,96	0,93	0,89	0,85	0,80	0,76

CORRECTION FACTORS FOR SOIL THERMAL RESISTIVITY

Moisture degree of soil	Very damp	Slightly damp	Slightly dry	Dry	Very dry
Thermal Resist. (K·m/W)	1	1,5	2	2,5	3
Factor	1,50	1,28	1,12	1	0,90

Other correction factors (for grouping cables, for harmonic currents), that are not in this specification, can be applied. Further information can be found in IEC 60364-5-52.

© 2024 Top Cable – Version 28 - 19.11.2024 | Issued by IML

Top Cable reserves the right to carry out any modification to the data sheets whatsoever without giving previous notice. All renders, specifications and particulars of weights, size and dimensions contained in this documentation is indicative only and shall not be binding on Top Cable.