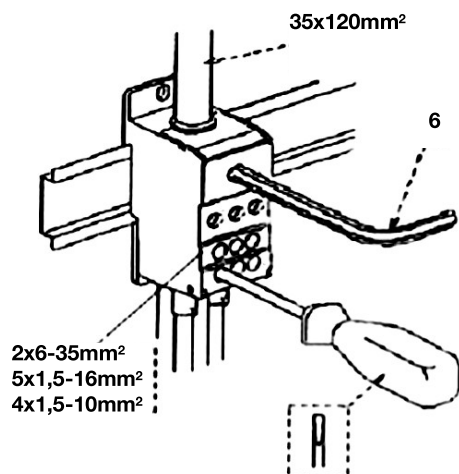


EAN	El.nr.	In 40°C	Ipk / Icw 1 s	Inngang / Utgang	Kabel massiv	Kabel fl.tr. m/ hylse	Moment
3250613800239	12 009 50	250A	51 / 21kA	1 x Ø 15 2 x Ø 9 5 x Ø 6,5 8 x Ø 6	35-120 mm ² 6-35 mm ² 1,5-16 mm ² 1,5-10 mm ²	6-25 mm ² 1,5-16 mm ² 1,5-10 mm ²	19 Nm 3,5 Nm 2 Nm 2 Nm


Tilkobling innkommende kabel

- minimum 35mm²,
 - maksimum 120mm²
- Skrue: 1 stk. Umbrako 6 mm
Tiltrekkingsmoment: 19 Nm

Tilkobling utgående kabel 2 stk.:

- minimum 6 mm²,
 - maksimum 35 mm²
- Skruer: tverrspor 5,5 mm
Tiltrekkingsmoment: 3,5 Nm


Tilkobling utgående kabel 5 stk.:

- minimum 1,5 mm²,
 - maksimum 16 mm²
- Skruer: tverrspor 4 mm
Tiltrekkingsmoment: 2 Nm

Tilkobling utgående kabel 4 stk.:

- minimum 1,5 mm²,
 - maksimum 10 mm²
- Skruer: tverrspor 4 mm
Tiltrekkingsmoment: 2 Nm

EAN	El.nr.	In 40°C	Ipk / Icw 1 s	Inngang / Utgang	Kabel massiv	Kabel fl.tr. m/ hylse	Moment
3250613800246	12 009 52	400A	51 / 21kA	1 x Ø 19 2 x Ø 9 5 x Ø 6,5 8 x Ø 6	95-185 mm ² 6-35 mm ² 1,5-16 mm ² 1,5-10 mm ²	6-25 mm ² 1,5-16 mm ² 1,5-10 mm ²	25 Nm 3,5 Nm 2 Nm 2 Nm

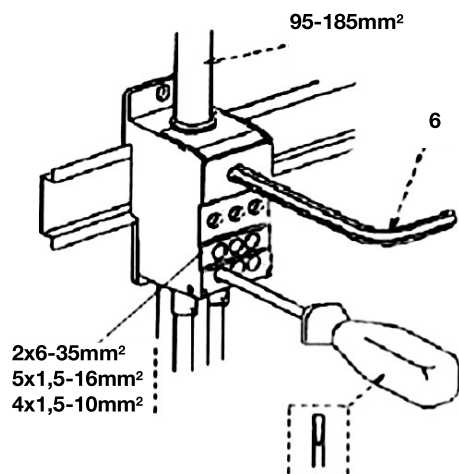
Tilkobling innkommende kabel

- minimum 95mm²,
 - maksimum 185mm²
- Skrue: 1 stk. Umbrako 8 mm
Tiltrekkingsmoment: 25 Nm

Tilkobling utgående kabel 2 stk.:

- minimum 6 mm²,
 - maksimum 35 mm²
- Skruer: tverrspor 5,5 mm
Tiltrekkingsmoment: 3,5 Nm


Tilkobling utgående kabel 5 stk.:

- minimum 1,5 mm²,
 - maksimum 16 mm²
- Skruer: tverrspor 4 mm
Tiltrekkingsmoment: 2 Nm

Tilkobling utgående kabel 4 stk.:

- minimum 1,5 mm²,
 - maksimum 10 mm²
- Skruer: tverrspor 4 mm
Tiltrekkingsmoment: 2 Nm

EAN	El.nr.	In 40°C	Ip / Icw 1 s	Inngang / Utgang	Kabel massiv	Kabel fl.tr. m/ hylse	Moment
3250613800116	12 009 51	160A	20 / 6,2kA	1 x Ø 12 6 x Ø 6,5 1 x 16x5mm	10-70 mm ² 2,5-16 mm ²	10-35 mm ² 1,5-16 mm ²	4 Nm 2 Nm

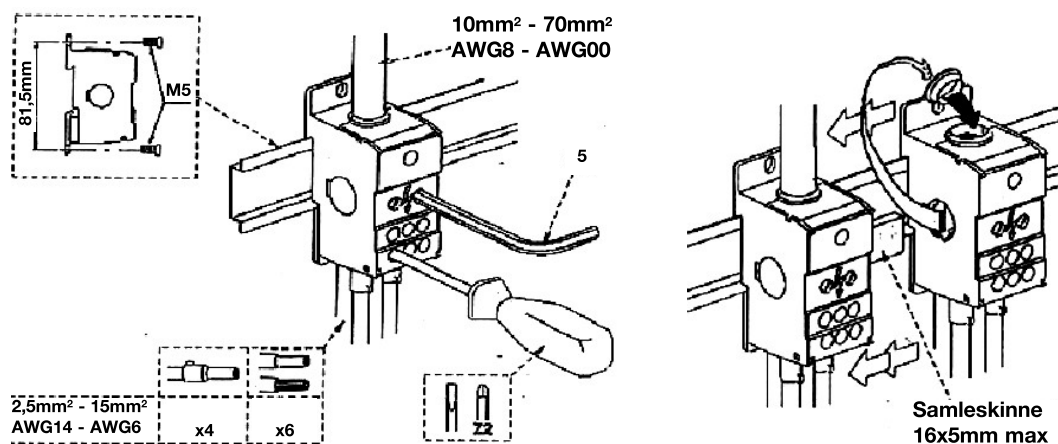

Tilkobling innkommende kabel / Samleskinne

Kabel:

- minimum 10mm²,
- maksimum 70mm²

Skrue: 1 stk. Umbrako 5mm

Tiltrekkingsmoment: 4 Nm

Samleskinne: max 16x5mm

Skruer: 2 stk. Umbrako 5mm

Tiltrekkingsmoment: 3 Nm

Tilkobling utgående kabel 6 stk.:

Kabel:

- minimum 2,5mm²,
- maksimum 16mm²

Skruer: Pozi 2 eller tverrspar

Tiltrekkingsmoment: 2 Nm

Tilkobling utgående kabel 2 stk.:

- minimum 6 mm²,

- maksimum 35 mm²

Skruer: tverrspar 5,5 mm

Tiltrekkingsmoment: 3,5 Nm

Tilkobling utgående kabel 5 stk.:

- minimum 1,5 mm²,

- maksimum 16 mm²

Skruer: tverrspar 4 mm

Tiltrekkingsmoment: 2 Nm

Tilkobling utgående kabel 4 stk.:

- minimum 1,5 mm²,

- maksimum 10 mm²

Skruer: tverrspar 4 mm

Tiltrekkingsmoment: 2 Nm