wieland

Wieland Electric


contacts are green.

Product data sheet

Item No. 92.050.1853.0

Distributor GST18I5V 3P1 V PB

Distribution block GST18i5, 5-pole, 1 Input; 3 Outputs, for dimming applications 2507400 V, 20A, coding: pastelblue

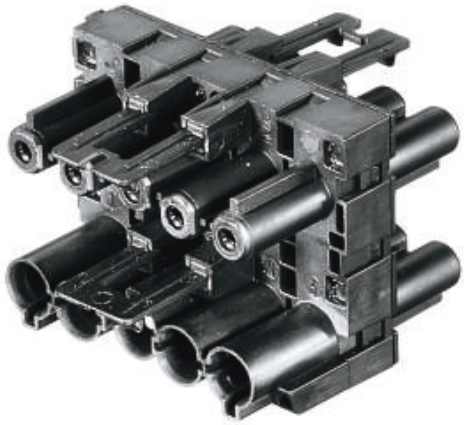

Item No.	92.050.1853.0
EAN	4049088086694
Order Unit	60 Piece(s)

Certificates / Approvals

Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 2
Lockable	Yes
Color of coding/ contact carrier	Pastel blue
Marking of poles	L, N, PE, D2, D1

Model

Number of inputs	1
Number of outputs	3
Type of fastening	No
Degree of protection (IP)	IP20
Type of distributor	H-Distributor

Material

Housing material	Polyamide
Halogen free	Yes
Contact material	CuZn

Insulation components continous temperature	100 °C
Surface finish	Silver-plated

Dimensions

Length	44 mm
Width	52 mm
Height	39 mm

Technical drawing

