Technical data sheet

Plug-in arrester V20 75 V

Item no. 5095360




Surge arrester, type 2

- For surge protection equipotential bonding to VDE 0100-443 (IEC 60364-4-44)
- Discharge capacity to 40 kA (8/20) per pole through high-performance varistors
- Modular, plug-in arrester with dynamic cut-off unit and visual status display
- Locking mechanism with vibration protection and voltage keying
- Plastic (UL 94 V-0)

Type 2 LPZ 1→2

Dimensions

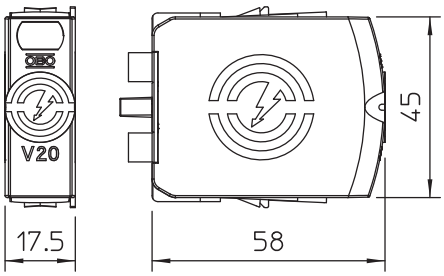

Master data

Item no.	5095360
Type	V20-0-75
Description 1	SurgeController V20
Description 2	plug-in arrester
Dimension	75V
Smallest sales unit (VG)	1,00 Piece
Weight	3,60 kg/100 pc.

Technical data sheet

Plug-in arrester V20 75 V

Item no. 5095360

Technical data



SPD to EN 61643-11	Type 2
SPD to IEC 61643-11	Class II
SPD to UL 1449	Type 4
Test class, type 2	☑
Nominal voltage AC (50/60 Hz)	60,00 V
Maximum continuous voltage AC	75,00 V
Maximum continuous voltage (L-N)	75,00 V
Nominal discharge current (8/20 µs)	20,00 kA
Nominal discharge current (8/20 µs) [L-N]	20,00 kA
Maximum discharge current (8/20 µs)	40,00 kA
Maximum discharge current (8/20 µs) [L-N]	40,00 kA
Protection level	0,50 kV
Protection level [L-N]	0,50 kV
Residual voltage [L-N] @ 1 kA	0,3 kV
Residual voltage [L-N] @ 5 kA	0,4 kV
Response time [L-N]	25 ns
Response time [N-PE]	100 ns
Short-circuit withstand for max. mains-side overcurrent protection	50 kA eff
Short-circuit resistant	☑
Operating temperature range	-40-+80 °C
Humidity	5,00 - 95,00 %
Function/defect display	Optical
Ports	One-Port SPD
Pole version	1
Pole number	1,00
Mounting type	On basic element
Housing material	PA UL 94 V-0
Installation location	Interior
Protection rating	IP20
Minimum distance	1,50 mm
Approvals	UL
Protective conductor current	< 250 µA
Blow-out	☐
Size	1 part unit
Remote signalling	☐
Integrated back-up fuse	☐
Signalling on device	Visual