

Data Sheet

Bardunbøyle



Bardunbøyle av kamstål er en bardunforankring med stor sikkerhet og brukes som fjellforankring med bardunvaier ved mast-/stolpefundamentering.


Lagerprogram:

- Bardunbøyle Ø20, 150kN C-C150 Pc-Coat
- Bardunbøyle Ø25, 250kN C-C200 Pc-Coat
- Bardunbøyle Ø32, 400kN C-C250 Pc-Coat

Teknisk informasjon:

Material: Kamstål B500NC, varmbøyd.

Kamstål diameter	L1(mm)	L2(mm)
Ø20	800	380
Ø25	1100	420
Ø32	1400	460

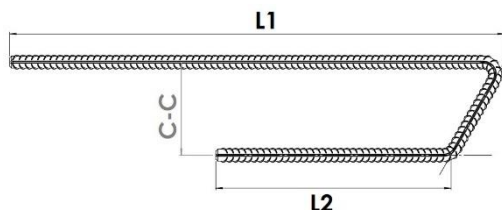

Montasje:

Se detaljert montasjebeskrivelse i RENblad 2012 | Versjon: 3.7, kapittel 8.5.4 Kamstålbøyle.

Korrosjonsbeskyttelse/Pc-Coat[™]:

Varmforsinking blir utført etter NS-EN-ISO 1461 og epoxy pulverlakk blir utført etter NS-EN 13438.

Vedrørende beleggtykkelse og ytterligere informasjon så henvises det til Document Q/PTC-T19A Specification for Pc-Coat SVV/JBV. Det vises også til produktdatablad for Pc-Coat og tilhørende FDV dokumentasjon. Bolt med PC Coat har en forventet levetid på minimum 100 år i korrosjonsklasse C4 iht. NS EN 12944-2.

Data Sheet

Guy-wire hanger rock



A guy anchor bracket made of ribbed rebar, used as a secure rock anchor for guy wires on mast or pole foundations.

Stock programme:


- Guy-wire hanger rock 150kN Ø20 C-C150 Pc-Coat
- Guy-wire hanger rock 250kN Ø25 C-C200 Pc-Coat
- Guy-wire hanger rock 400kN Ø32 C-C250 Pc-Coat

Technical Information:

Material: B500NC deformed reinforcing steel (rebar), hot-bent.

Dimensions:

Rebar diameter	L1 (mm)	L2 (mm)
Ø20	800	380
Ø25	1100	420
Ø32	1400	460

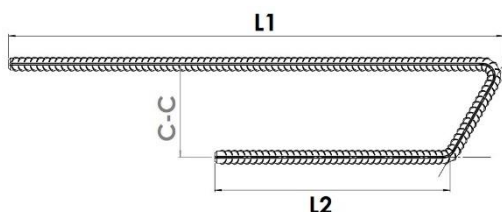

Installation:

Refer to the detailed installation description in RENblad 2012 | Version: 3.7, Chapter 8.5.4 Kamstålboyle.

Corrosion protection/Pc-Coat

Hot-dip galvanization is carried out in compliance with NS-EN-ISO 1461 and epoxy powder coating in compliance with NS-EN 13438. Regarding coating thickness and further information, please see Document Q/PTC-T19A – Specification for Pc-Coat – SVV/JBV. Please also refer to the Pc-Coat Product Data Sheet and accompanying FDV documentation. A bolt with PC Coat has an expected service life of at least 100 years in corrosion class C4, in accordance with NS-EN ISO 12944-2.