



DECODISC  
 - SENSOR & DALI



220-240V 50/60Hz IP44






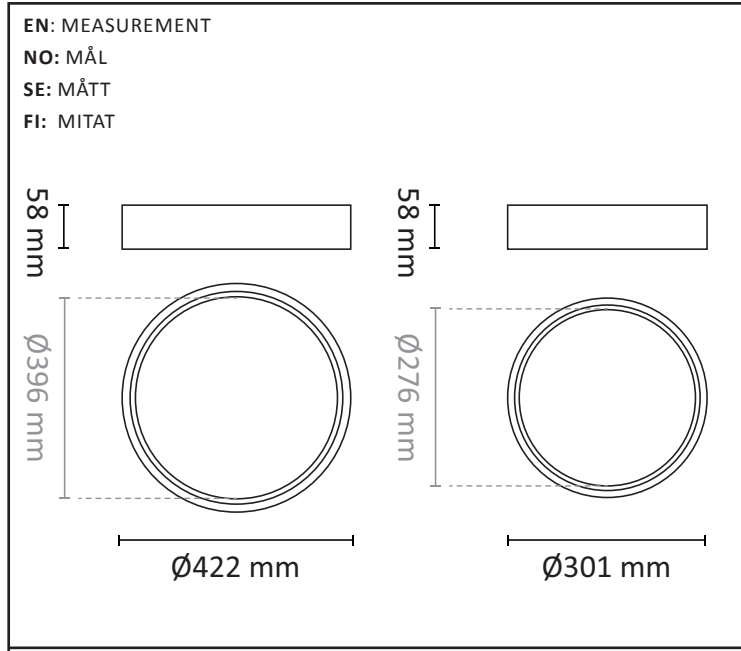


EN: This product contains a light source of energy efficiency class G  
 NO: Dette produktet inneholder en LED-lyskilde med energieffektivitets-klasse G  
 SE: Denna produkt innehåller en ljuskälla med energieffektivitetsklassen G  
 FI: Tämä tuote sisältää LED -valonlähteen energiatehokkuus luokalla G

LED LED  
**EN:** Unreplaceable light source.  
 Replaceable control gear by qualified electrician.  
**NO:** Ikke utskiftbar lyskilde.  
 Forkobling kan byttes av autorisert el-installatør.  
**SE:** Ej utbytbar ljuskälla.  
 Drivdon kan bytas av auktoriserad elektriker.  
**FI:** Ei vaihdettava valonlähde.  
 Valtuutettu sähköasentaja voi vaihtaa käyttölaitteet.









**OBS!**  
**EN:** Installation must be performed by a professional.  
**NO:** Må installeres av autorisert el-installatør.  
**SE:** Måste installeras av en behörig elektriker.  
**FI:** Vain valtuutettu sähköasentaja saa asentaa.

0,05m  
**EN:** Minimum distance to flammable material in the beam direction.  
**NO:** Minimumsavstand til brennbart materiale i armaturens stråleretning.  
**SE:** Minsta avstånd mellan brännbart material och lampans ljusrättning.  
**FI:** Vähimmäismitta valaisimesta palaavaan materiaaliin.

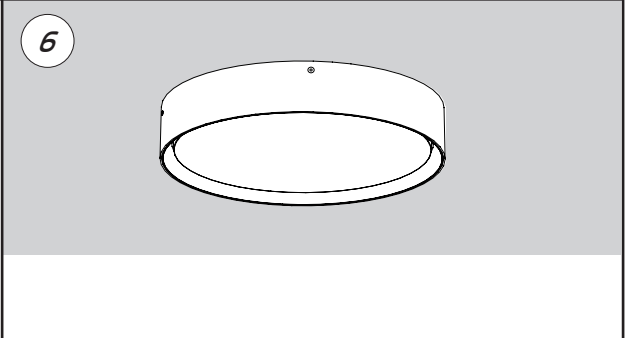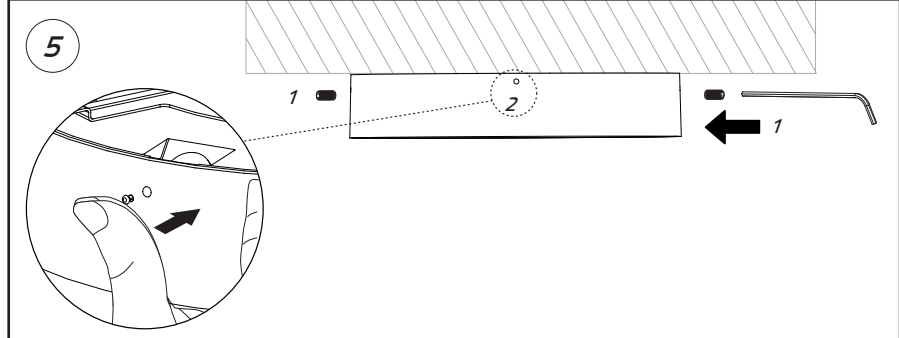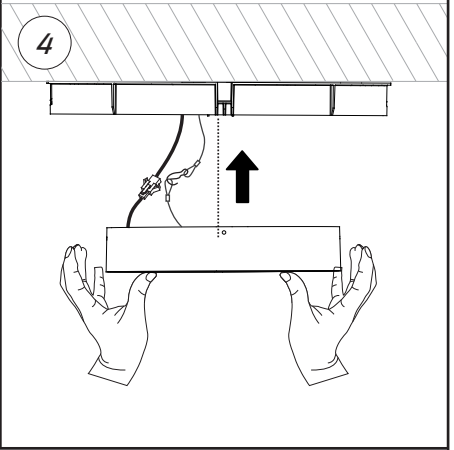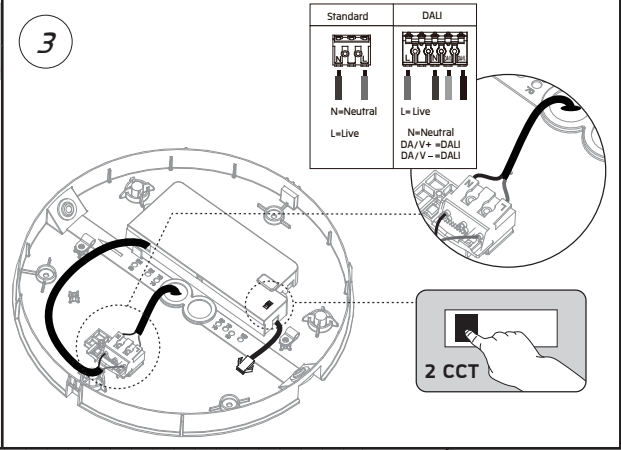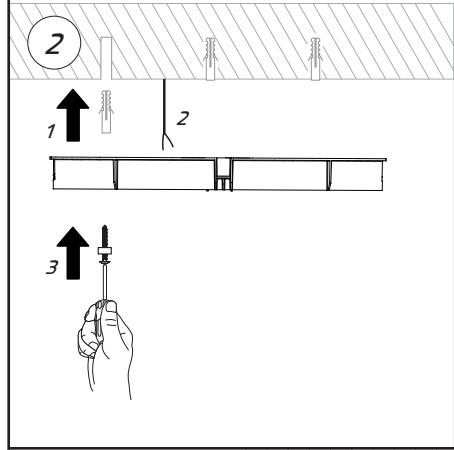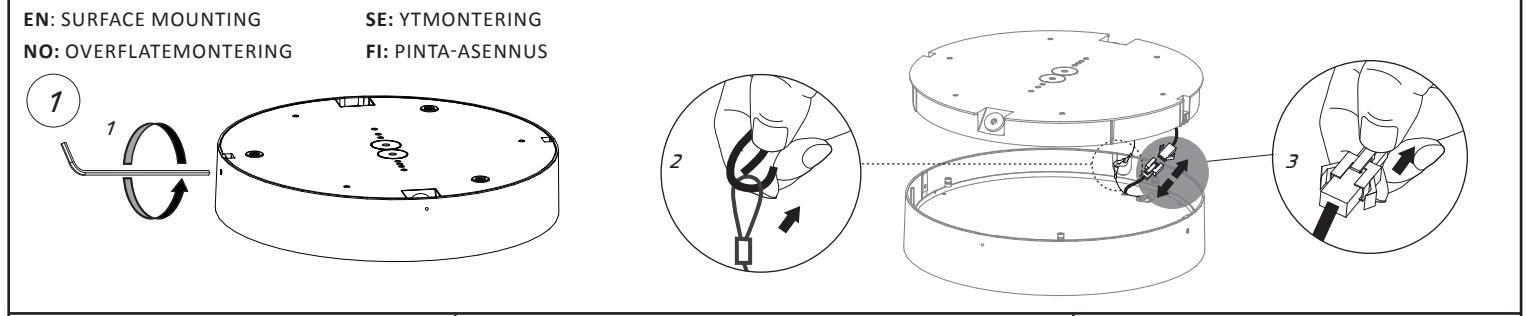


EN: WIRE SUSPENSION  
NO: WIRE OPPHENG


SE: WIREUPPHÄNG  
FI: VAJERIRIPUSTUS

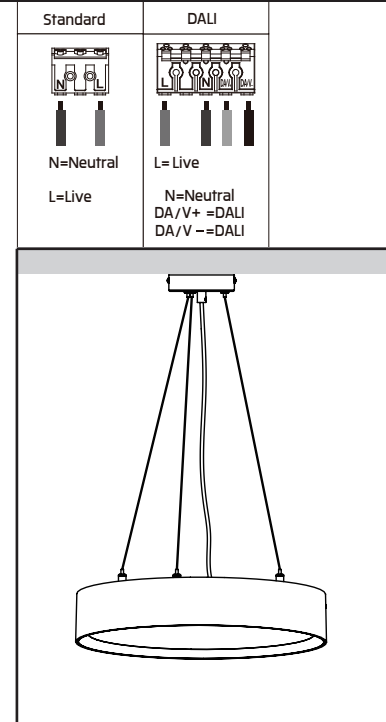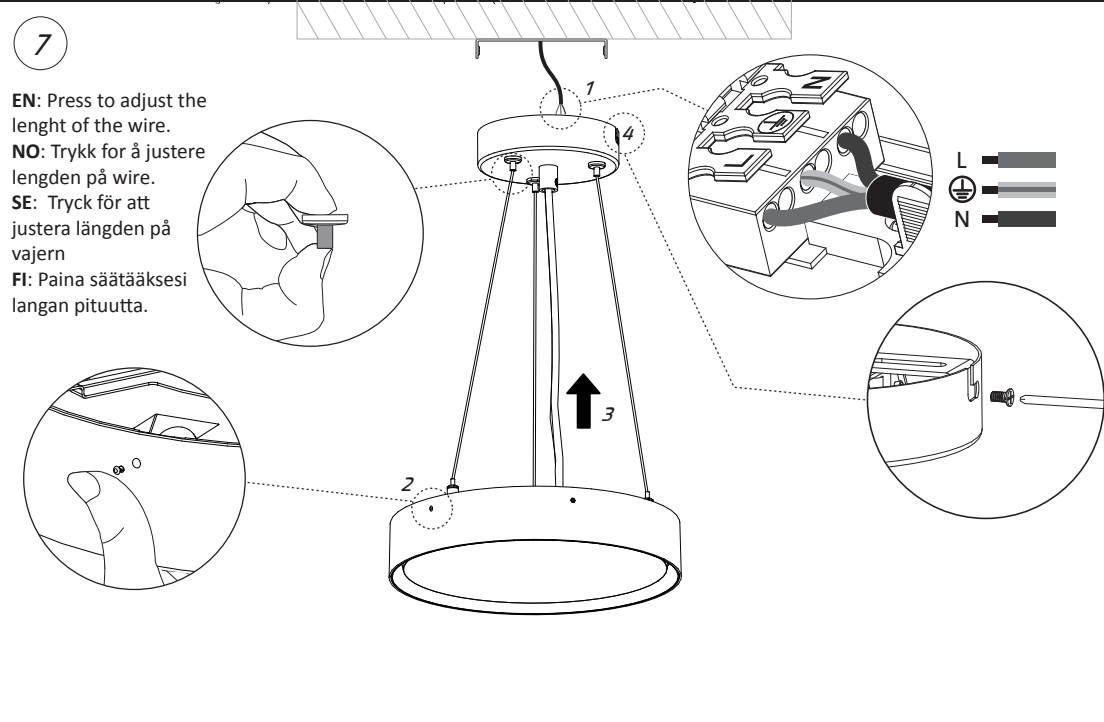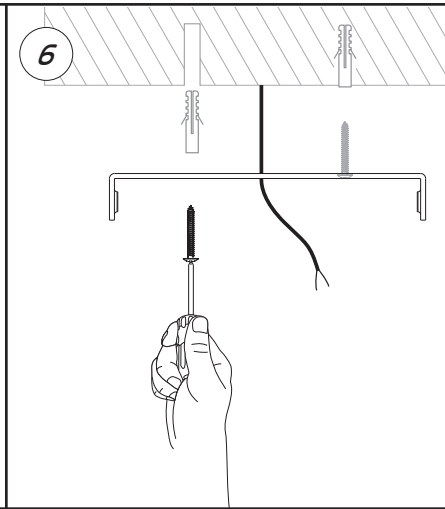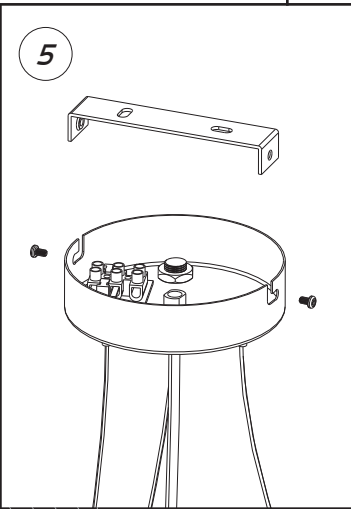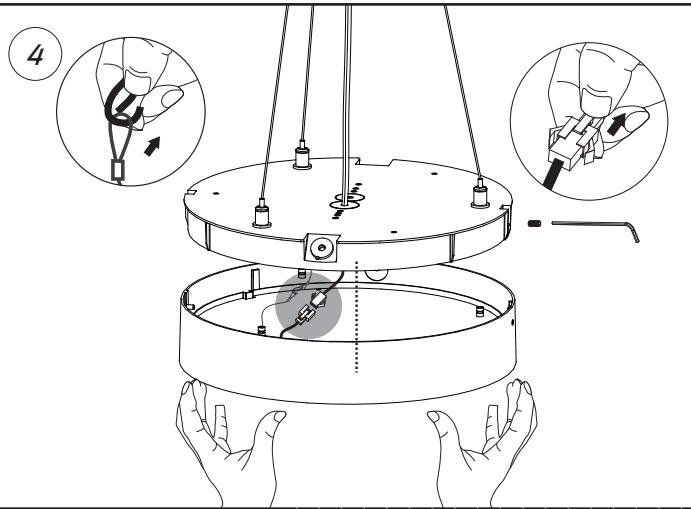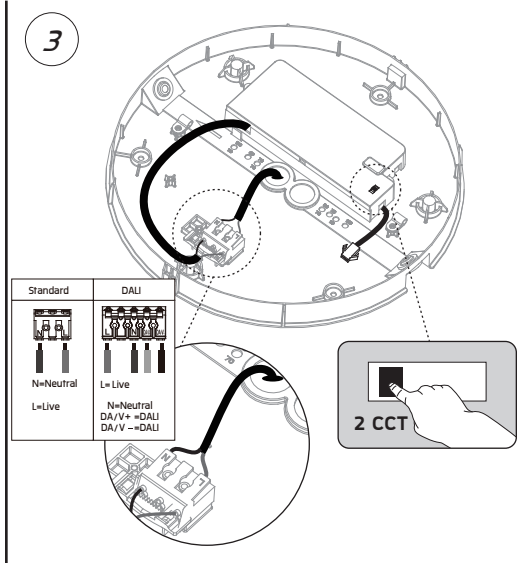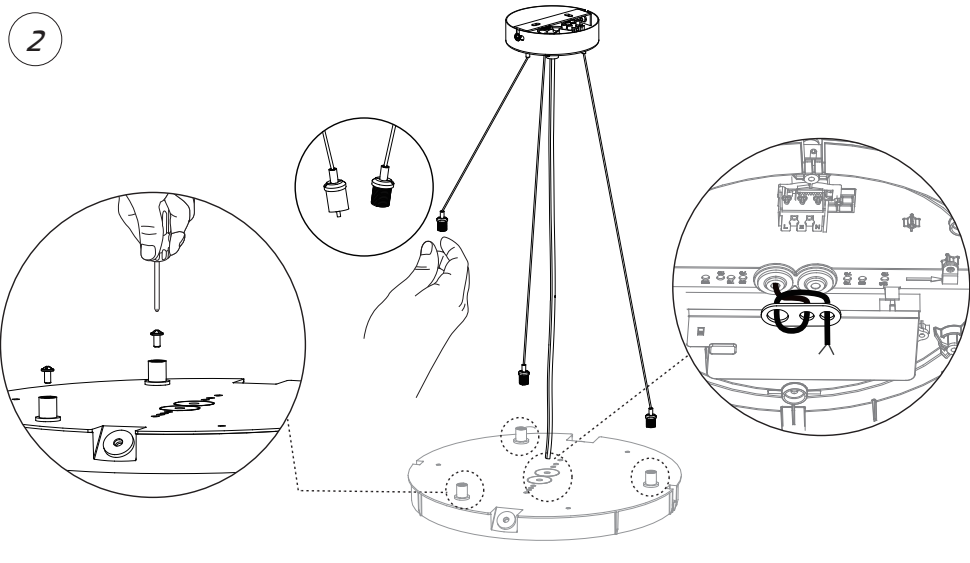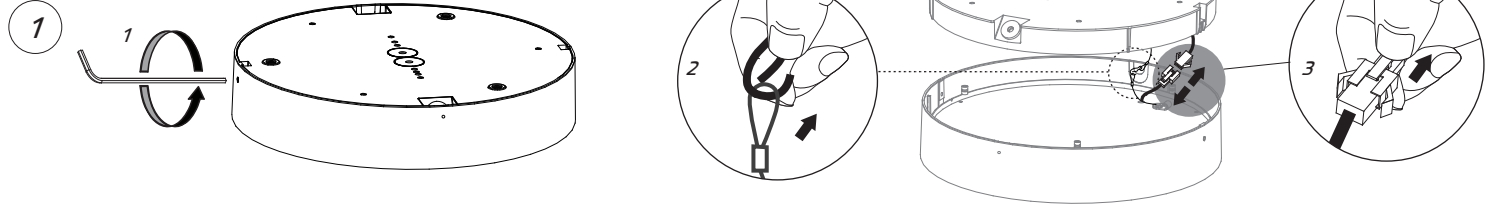

Ceiling mounting height: 3m

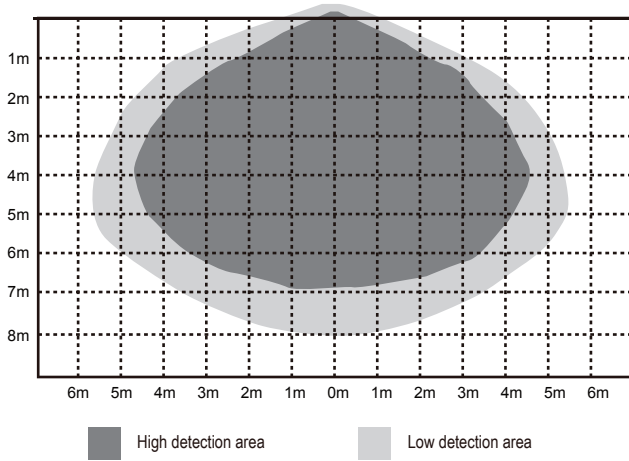

Wall mounting height: 1,5m

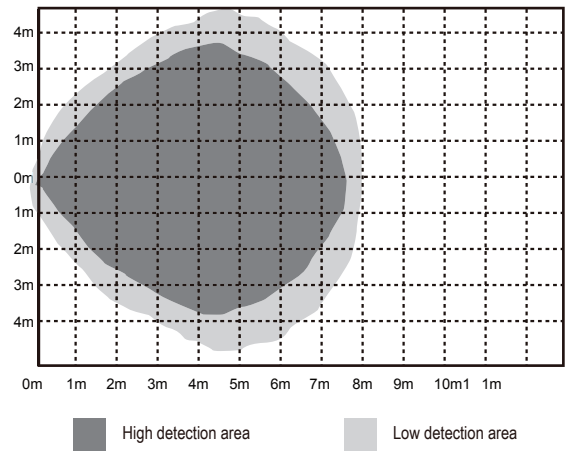

**DIP SWITCH:**

Detection Area: Deteksjonsområde: Detektionsområde: Tunnistusalue:		Hold Time: Holdetid: Hålltid: Pitoaika:			Daylight Sensor: Dagslyssensor: Dagsljussensor: Päivänvalotunnistin:		Stand-by DIM level		Stand-by Period	
1		2	3		4		5		6	
–	100%	–	–	5s	–	Disable	–	0%	–	∞
ON	50%	–	ON	60s	ON	30Lux	ON	20%	ON	15min
		ON	–	3min						
		ON	ON	10min						

**FACTORY SETTINGS / FABRIKINNSTILLING / FABRIKINSTÄLLNING / TEHDASAAETUS**

Detection Area: Deteksjonsområde: Detektionsområde: Tunnistusalue:	Hold Time: Holdetid: Hålltid: Pitoaika:	Daylight Sensor: Dagslyssensor: Dagsljussensor: Päivänvalotunnistin:	Stand-by DIM level	Stand-by Period
<b>100%</b>	<b>5s</b>	Disable. Deaktiver. Inaktivera. Ei käytössä.	<b>0%</b>	<b>∞</b>