




# GYRO® FRAME 1 WARMDIM

220-240V 50/60Hz 300mA LED 9W IP44\*

**EN: MEASUREMENT**

**NO: MÅL**  
**SE: MÅTT**  
**FI: MITAT**

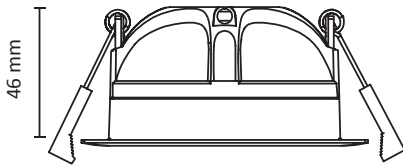

95x95 mm




**EN:** Installation must be performed by a qualified electrician.  
**NO:** Må installeres av autorisert el-installatør.  
**SE:** Måste installeras av en behörig elinstallatör.  
**FI:** Vain valtuutettu sähköasentaja saa asentaa.

**OBS!**

**EN: CABLE CONNECTION**

**NO: LEDNINGSTILKOBLING**  
**SE: KABELANSLUTNING**  
**FI: JOHTOLIITÄNTÄ**




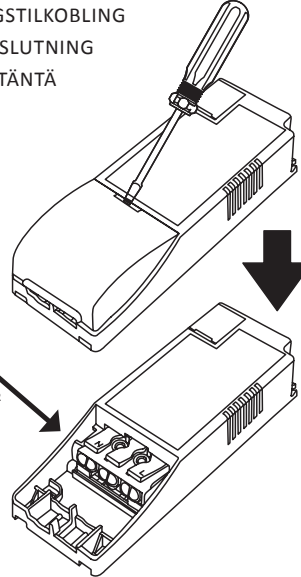


**EN:** Included dimmable LED driver.  
**NO:** Inkludert dimbar LED driver.  
**SE:** Inklusive dimbar LED drivdon.  
**FI:** Sisältää himmennettävän LED-liitäntälaitteen.

**EN: COMPATIBLE PRODUCTS.**

**NO: KOMPATIBLE PRODUKTER.**  
**SE: KOMPATIBLA PRODUKTER.**  
**FI: YHTEENSOPIVAT TUOTTEET.**


UniDim™	KUD-265EV
UniDim™	KUD-500EV-L
UniDim™	KUD-500EV-LS
UniDim™	DUO
UniDim™	MINI
UniDim™	KDT-500IE
WiDim®	WI-FI system
Bluedim®	Bluetooth system
	DOWNLIGHT BOX HIGH
	DOWNLIGHT BOX LOW
	DRIVER PIPE HOUSING

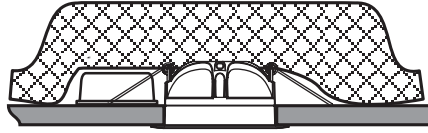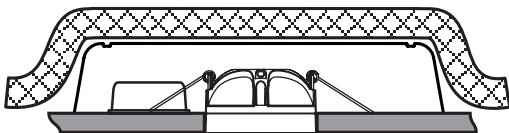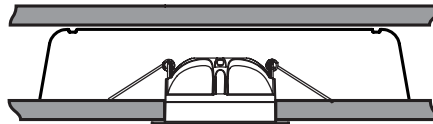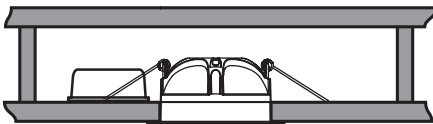


**EN:** May be covered by insulation sheet.  
**NO:** Kan overdekkes av isolasjonsmatter.  
**SE:** Kan övertäckas av isolationsmattor.  
**FI:** Voi peittää eristysmatolla.



**EN:** White/black may be used indoors and outdoors.  
**NO:** Hvit/sort kan benyttes innendørs og utendørs.  
**SE:** Vit/Svart kan användas inomhus och utomhus.  
**FI:** Valkoinen/musta sisä- ja ulkokäyttöön.

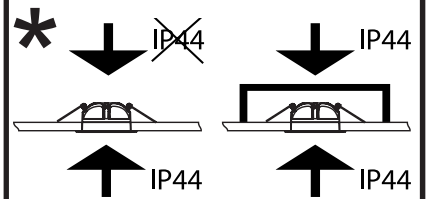

**EN:** IP44 from the luminaire underside.  
**NO:** IP44 fra armaturens underside.  
**SE:** IP44 från armaturens undersida.  
**FI:** IP44 valaisimen alapuolelta.



**EN:** Minimum distance to flammable material in the beam direction.  
**NO:** Minimumsavstand til brennbar materiale i armaturens stråleretning.  
**SE:** Minsta avstånd mellan brännbart material och lampans ljusrättning.  
**FI:** Vähimmäisetäisyys valaisimesta herkästi palavaan materiaaliin.