



220-240V 50/60Hz LED IP44\*

# COMPACT SOFT 1

# COMPACT SOFT 2

EN: MEASUREMENT

SE: MÅTT

NO: MÅL



FI: MITAT

### COMPACT SOFT 1


Output:	Lumen	Watt	mA
	1100 lm	11W	140 mA

### COMPACT SOFT 2

With switchable output:	Lumen	Watt	mA
	1700 lm	15W	190 mA
	2350 lm	23W	300 mA

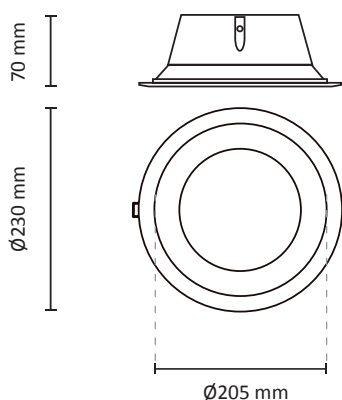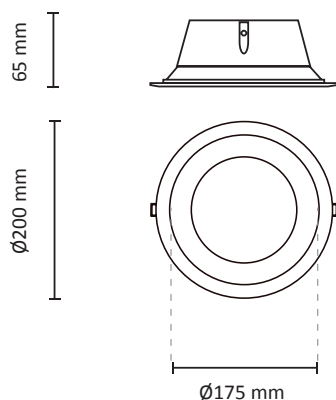

Min.  
80 mm

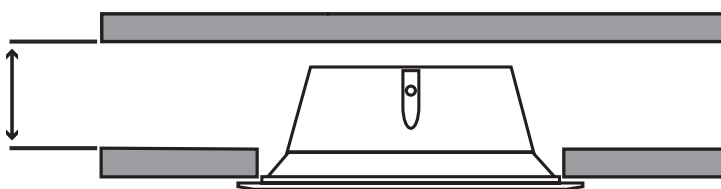

EN: CORRESPONDING PRODUCT.


NO: TILHØRENDE PRODUKT.

SE: TILLHÖRANDE PRODUKT.

FI: AIHEESEEN LIITTYVÄ TUOTE.

UniDim™	KUD-265EV
UniDim™	KUD-500EV-L
UniDim™	KUD-500EV-LS
UniDim™	DUO
UniDim™	MINI
UniDim™	KDT-500IE
WiDim®	WI-FI system
Bluedim®	Bluetooth system

EN: The luminaire is complete with cable/connector.  
 NO: Armaturet leveres komplett med ledning/plugg.  
 SE: Armaturerna levereras komplett med kabel/kontakt.  
 FI: Valaisimet toimitetaan liitosjohdolla/pistokkeella.

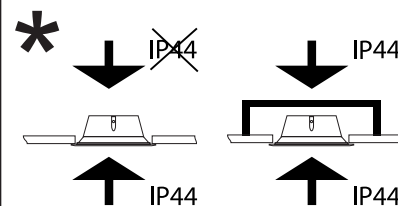

EN: IP44 from the luminaire underside.

NO: IP44 fra armaturens underside.

SE: IP44 från armaturens underside.

FI: IP44 valaisimen alapuolelta.


**OBS!**

EN: Installation must be performed by a qualified electrician.

NO: Må installeres av autorisert el-installatør.

SE: Måste installeras av en behörig elinstallatör.

FI: Vain valtuutettu sähköasentaja saa asentaa.



EN: Minimum distance to flammable material in the beam direction.

NO: Minimumsavstand til brennbart materiale i armaturens stråleretning.

SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.

FI: Vähimmäismitta lampusta palaavaan materiaaliin.