




220-240V 50/60Hz LED IP44\*

# COMPACT SOFT 2 DALI


EN: MEASUREMENT

NO: MÅL  
SE: MÅTT  
FI: MITAT

70 mm  
Ø230 mm


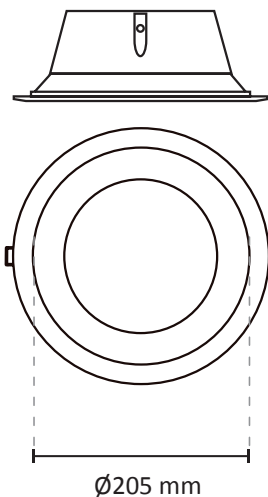


DALI DRIVER

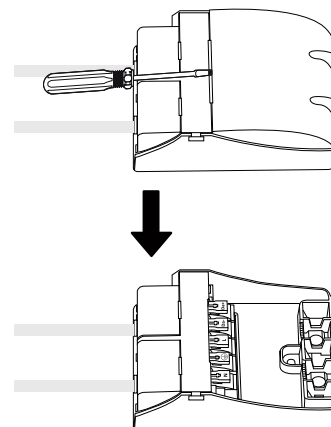

EN: The luminaire is complete with 12 027 11 Linect® 5-pole connector with cable.  
NO: Armaturet leveres komplett med 12 027 11 Linect® 5-pol koblingsboks med kabel.  
SE: Armaturerna levereras komplett med 12 027 11 Linect® 5-pol koblingsboks med kabel.  
FI: Valaisimet toimitetaan 5-napaisella 12 027 11 Linect®-liitäntäkotelolla ja kaapelilla.


Min.  
80 mm

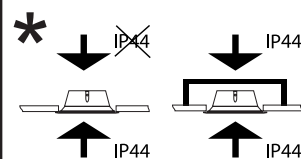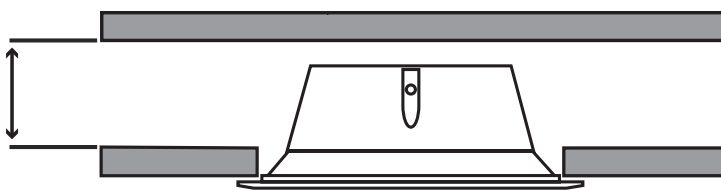

EN: IP44 from the luminaire underside.  
NO: IP44 fra armaturens underside.  
SE: IP44 från armaturens underside.  
FI: IP44 valaisimen alapuolelta.

**OBS!**

EN: Installation must be performed by a qualified electrician.  
NO: Må installeres av autorisert el-installatør.  
SE: Måste installeras av en behörig elinstallatör.  
FI: Vain valtuutettu sähköasentaja saa asentaa.



EN: Minimum distance to flammable material in the beam direction.  
NO: Minimumsavstand til brennbar materiale i armaturens stråleretning.  
SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.  
FI: Vähimmäismitta lampusta palaavaan materiaaliin.