





Price and availability after [Login](#)

Availability ✓

PU (SPU): 25 (1) Piece

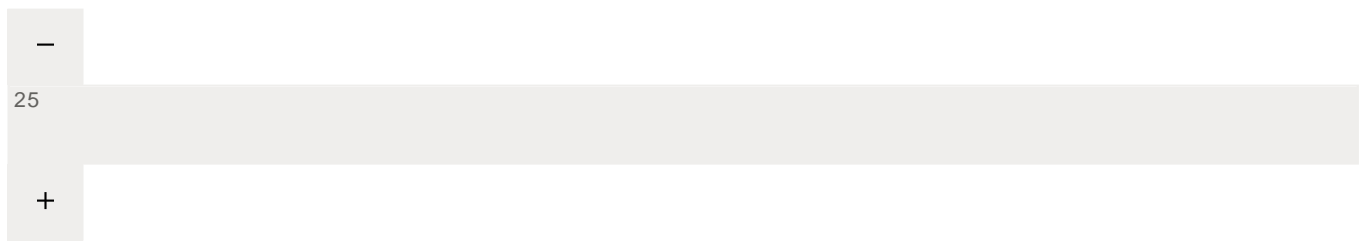


 Add to project

 Data sheet as PDF

 Compare

 Bookmark

 Find distributors

Overview

Data

Approval

Downloads

Related products

Customers also purchased

Description

Note:

Inductive loads have to be attenuated by an appropriate protective circuit in order to protect relay coils and contacts.



Product details

Details ^

Technical Data

Control circuit

Nominal input voltage U_N	230 V AC/DC
Input voltage range	-20 ... +10 %
Nominal input current at U_N	3.5 mA

Load circuit:

Number of changeover/switchover contacts	1
Contact material	AgSnO ₂
Limiting continuous current	6 A
Max. make current (resistive)	0.02 s 20 A (AC)
Max. switching voltage	250 VAC

Signaling

Status indication	LED yellow
-------------------	------------

Safety and protection:

Item no. 857-358



Rated impulse voltage	4 kV
-----------------------	------

Pollution degree	2
Dielectric strength, control/load circuit (AC, 1 min)	4 kV _{e?}
Dielectric strength, control/load circuit (AC, 1 min)	4 kV _{rms}

— Connection data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 Inch

— Geometrical Data

Width	6 mm / 0.236 inch
Height from upper-edge of DIN-35 rail	81 mm / 3.189 inch
Depth	94 mm / 3.701 inch

— Mechanical data

Type of mounting	DIN-35 rail
------------------	-------------

— Material Data

Color	gray
Fire load	0.577 MJ
Weight	32.02 g

— Environmental Requirements

Permissible surrounding air (operating) temperature at U _N	-40 ... 60 °C
Surrounding air (storage) temperature	-40 ... 70 °C
Pressing temperature	-25 ... 50 °C

Item no. 857-358



Standards and specifications

Elementary relay

WAGO elementary relay

857-155

Commercial data

Country of Origin

CN

GTIN

4045454471576

Product Group

6 (Interface Electronics)




Approvals / Certificates

Ex-Approvals ^

Logo
Approval
Certificate name

Logo



Approval:

ATEX

DEKRA EXAM GmbH

Certificate name:

BVS_14_ATEX_E_091_X

English

PDF (2.3 MB)

[Download](#)
[Bookmark](#)

Logo



Approval:

DEKRA EXAM GmbH

Item no. 857-358



English

PDF (1.5 MB)

- › Download
- › Bookmark

Logo




Approval:


UL
UL International Germany GmbH
(HAZARDOUS LOCATIONS)
Certificate name:
E198726 Sec.4

 English

PDF (28.9 kB)


- › **Download**
- › **Bookmark**

Ship Approvals 

UL-Approvals 



Downloads

Documentation 

 Bid Text

857-358
Relaisbaustein
Jan 15, 2016



DOC
26.6 kB

 German

Download
Bookmark

Item no. 857-358





Compatible products

General accessories ^

^ Show fewer ∨ Show more

Jumper ∨

Marking accessories ∨

ferrule ∨

tools ∨

> United States (EN)

> We are happy to help

 **1-800-DIN-RAIL (346-7245)**



© 2018 WAGO Corporation

Contact

Careers

Imprint

Item no. 857-358

Privacy



