# **SIEMENS**

Product data sheet 3VA9908-0BB22



UNDERVOLTAGE RELEASE 60 V AC 50/60HZ ACCESSORY FOR 3VA1 100/160 3VA2 100/160/250/400/630

Similar to image

| Technical data:                               |     |                   |
|---|-----|-------------------|
| Accessories                                   |     | Auxiliary release |
| Number of slots                               |     | 3                 |
| Conductor cross-section that can be connected |     |                   |
| • solid                                       | mm² | 0.5 1.5           |
| Torque  | N⋅m | 0.4               |
| Wire stripping length                         | mm  | 10                |
| Insulation voltage / rated value              | V   | 690               |
| Overvoltage class                             |     | III               |
| Degree of pollution                           |     | 3                 |
| Impulse voltage resistance                    | kV  | 4                 |

## Certificates/approvals:

### **Declaration of Conformity**

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9908-0BB22


http://support.automation.siemens.com/WW/view/en/3VA9908-0BB22/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA9908-0BB22

### **CAx-Online-Generator**

http://www.siemens.com/cax

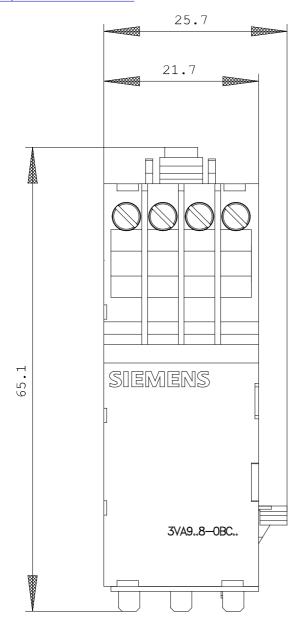

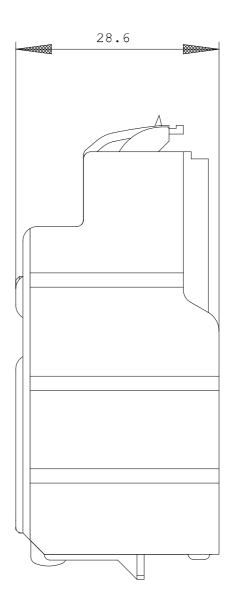

last change: Apr 21, 2014