

FDV

13

ELnumber	Material No.	Material Discription
4337373	1SCA022259R7410	ADAPTER FOR HJ.BLOKK OEZNP1
4337664	1SCA022387R1620	FESTEBØYLE F/FORBIKOBL.OTZW17
4337439	1SCA022639R5610	FESTEBØYLE F/MEK.FORIGL.OTZW24
4337048	1SCA022767R6910	KOBL.SKINNER OTZC13
4337049	1SCA022767R7120	KOBL.SKINNER OTZC23
4337663	1SCA022431R5280	MEKANISK FORRIGLING OTZW10,F/OT 125-250
4337375	1SCA022276R2470	MERKEETIKETT U/TEKST,OBEAZX 01
4337374	1SCA022264R9910	MERKEETIKETT U/TEKST,OBEAZX 10
4337843	1SCA022714R8810	MODUL F/HJ.KONT OEA28
4337672	1SCA022467R5140	OAZX1 ADAPTER FOR OA2G11
4337438	1SCA022421R7600	OTZW8 PARALLELLMEKANISME
2437853	1SCA022162R8020	OZXE 19 TILKOBL.LASK(SETT A 3)
4337376	1SCA022078R1600	PARALLELLKOB.MEKANISME OESAZW2
4363610	1SCA022865R5100	Parallellmekanisme OWP6D125
4363608	1SCA022865R4800	Parallellmekanisme OWP6D40
4363609	1SCA022865R5010	Parallellmekanisme OWP6D80
1683275	1SCA022459R8560	SIKRINGSOVERV.OFM260 100-260V
1683276	1SCA022459R8480	SIKRINGSOVERV.OFM690 380-690V
4337632	1SCA022353R4110	SKILT FOR OT/OH2 OPB2 SORT
4337633	1SCA022353R4200	SKILT FOR OT/OH2 OPY2 GUL
2437850	1SCA022161R8650	TILKOBLINGSLASK OZXE 20
2437851	1SCA022161R8810	TILKOBLINGSLASK OZXE 21

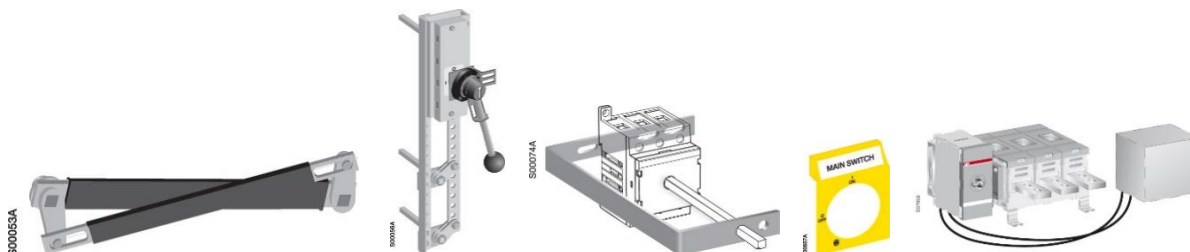


ABB AS, Low Voltage Products

Inngår i Part of
ABB AS

Adresse Address
Postboks 100 Sentrum
Amm. Aallsgt. 97
3701 SKIEN
Norway

Telefon Phone
Nasjonal 03500
International +47 22872000

Web:
www.abb.no/automasjonsprodukter
Product catalogue online:
www.abblvp.no

Foretaksregisteret
Register of Business Enterprises
NO982 085 160MVA



Handled by
Matti Tuononen

Date
27/06/2014

Pages
1 (2)

Letter of confirmation

To whom it may concern

We hereby confirm that the listed ABB products can be used in ambients specified below:

OT16F...160E_ , OT16...125F_C_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.
 - o At - 40C the maximum number of cold starts is 100 operations.
 - o In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

OT200...4000E_ , OT160...3200E_C_ , OS32G_ ... OS1250_ , OTDC16_ ... 500_

- Storage & transportation ambient temperatures
 - o - 40C ...+ 55C, short time (2h/24h) + 70C. Ambient humidity as specified in IEC60947-1 standard.
- Operation ambient temperatures
 - o Continuously - 5C ... + 35C, short time (2h/24h) + 40C, as specified in IEC60947-1 standard. Product ratings as shown in the documentation.

ABB Oy

Low Voltage Products
Business Identity Code: 0763403-0 VAT-Muotitie 2 A
code FI07634030
Domicile: Helsinki

Visiting Address
Muotitie 2 A
FI-65320 Vaasa
FINLAND

Postal Address
P.O. Box 622
FI-65101 Vaasa
FINLAND


Company Address
Strömbergintie 1
FI-00380 Helsinki
FINLAND

Telephone
+358 10 22 11
Telefax
+358 10 22 45708

Internet
www.abb.fi
e-mail:
first name.last name
@fi.abb.com

- At - 35C the endurance values according to the requirements of category B.
- In ambient temperatures over + 35C the current ratings must be derated according to the manufacturers instructions. Ambient humidity shall not exceed the level specified in the standard IEC60947-1.

Yours faithfully



Martti Tuononen

Product manager