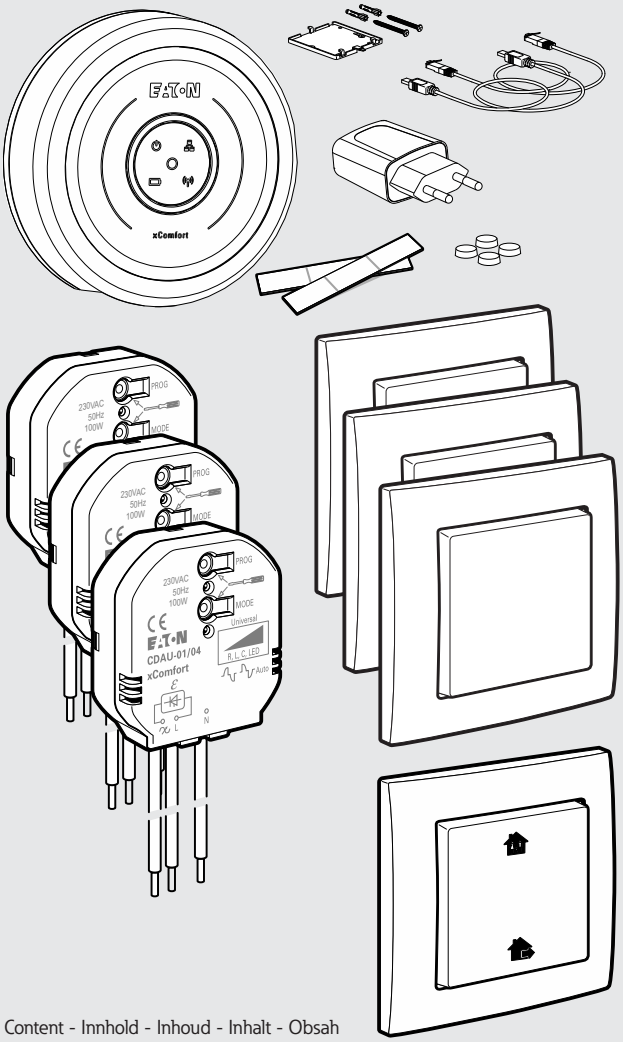
Wireless DIM & App set
Flush mount

CPAD-00/221 - 300310

0 - 100W

Quick Installation Card

Hurtig installasjon kort - Snelle installatiekaart -
Schnellinstallationskarte - Karta pro rychlou instalaci



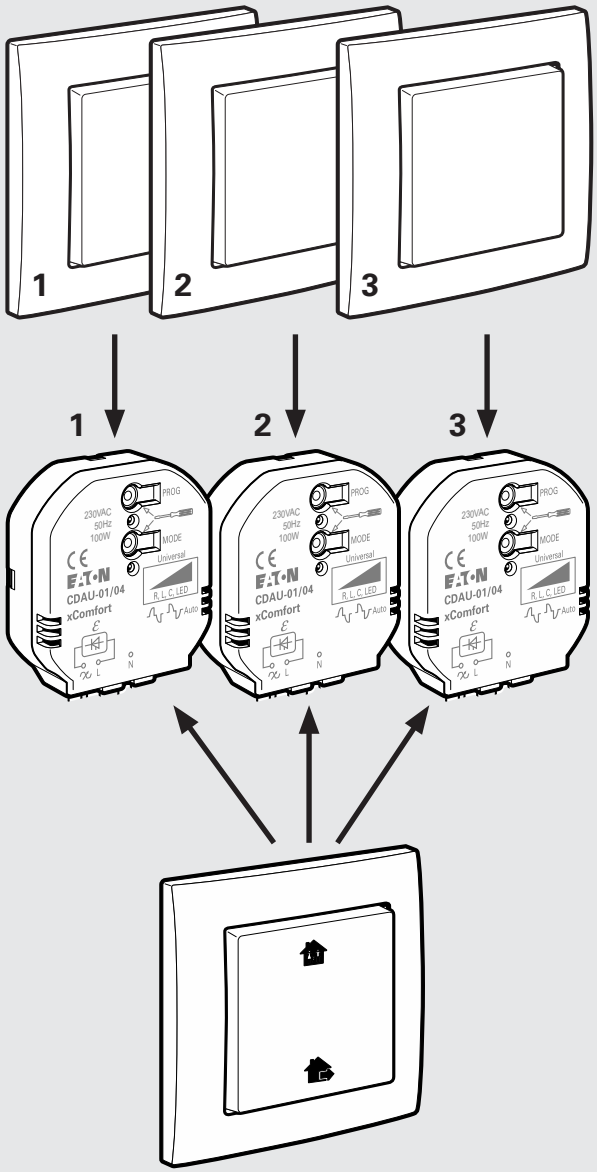
Content - Innhold - Inhoud - Inhalt - Obsah

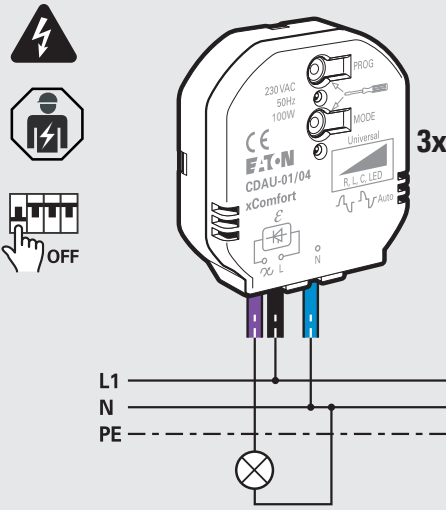
Powering Business Worldwide

www.eaton.com/recycling

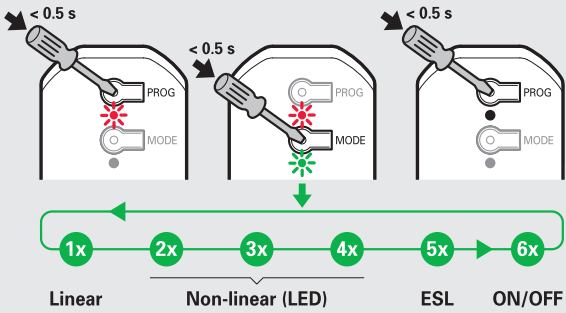
QIC_Wireless_Dim+App-Set.indd
06.2019a / IL019239ZU / 136211206

Pre-configured / Pre-konfigurert / Voorgeconfigureerd / Vorkonfiguriert / Předkonfigurováno

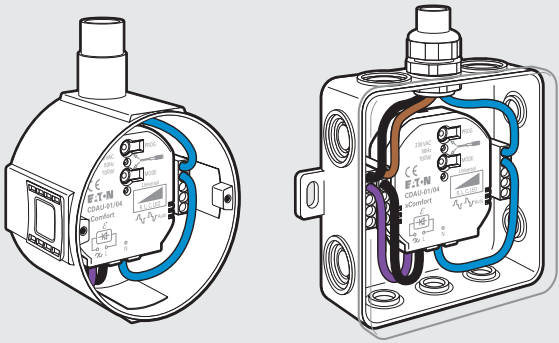


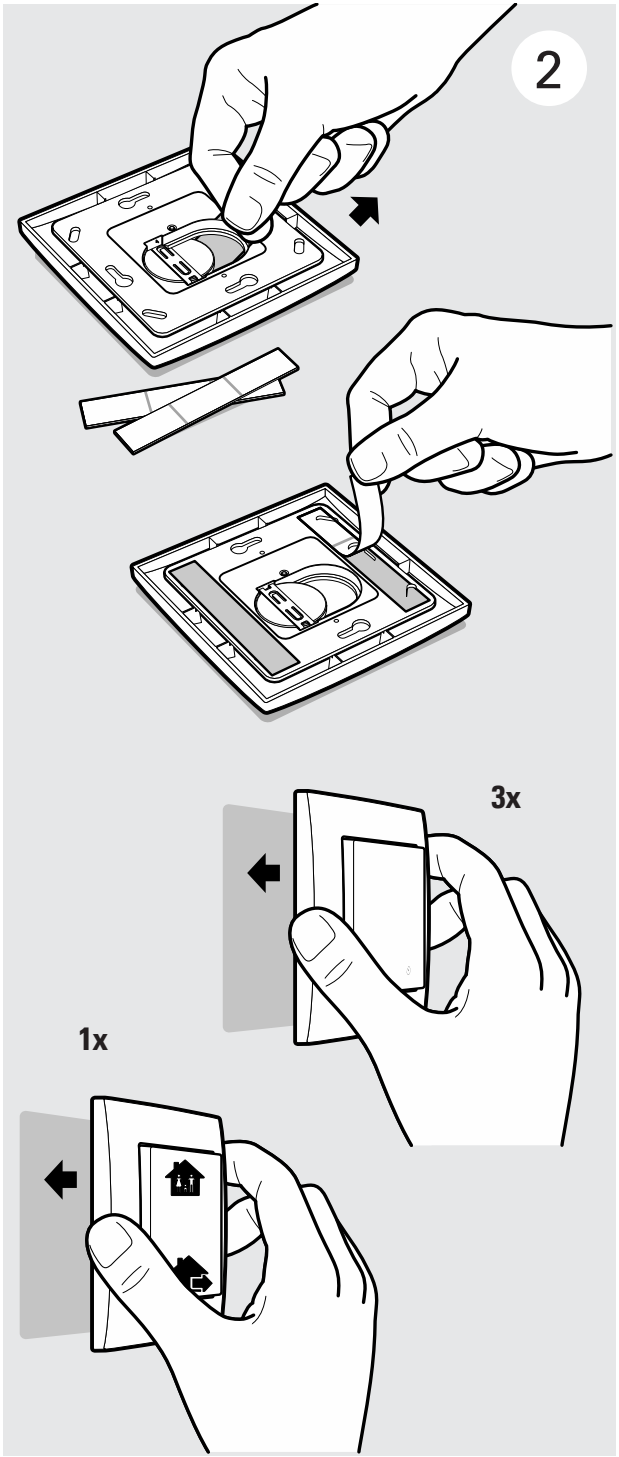


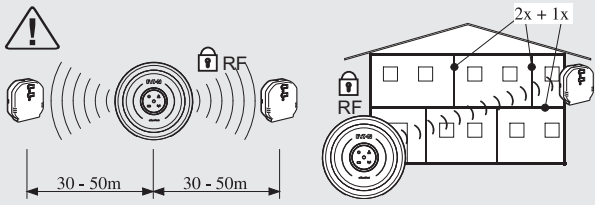
Optional adjust dimming range

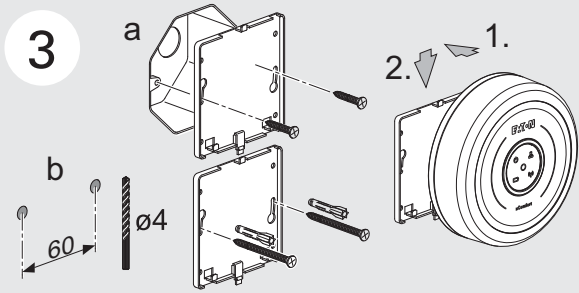


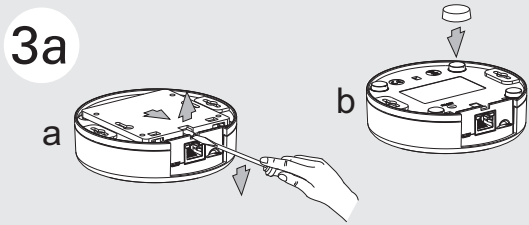
Mounting examples

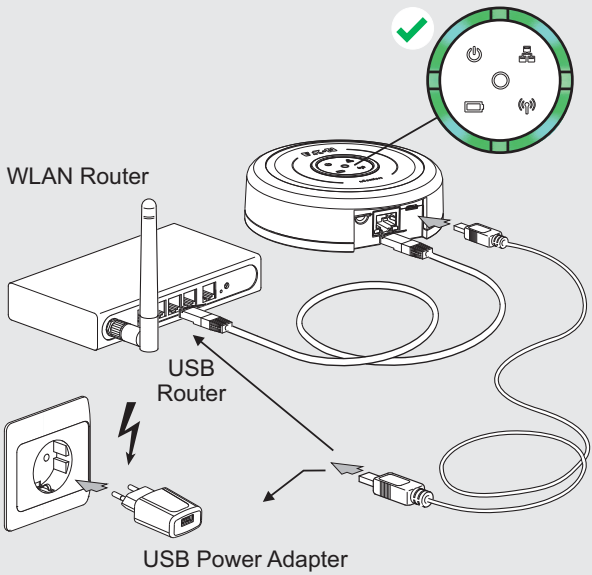



2
3x
1x


RF
30 - 50m
30 - 50m
2x + 1x
RF


3
a
b
60
ø4
1.
2.


3a
a
b


WLAN Router
USB
Router
USB Power Adapter

4

Available on the App Store

Get it on Google play



xComfort Bridge





EN Start App, select your xComfort Bridge and follow the Instructions. The Bridge must be in the same network!

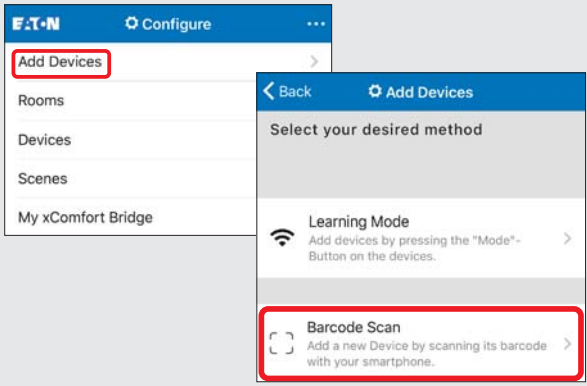
NO Start app, velg xComfort Bridge og følg videre instrukser. xComfort Bridge må være i samme lokale nettverk!

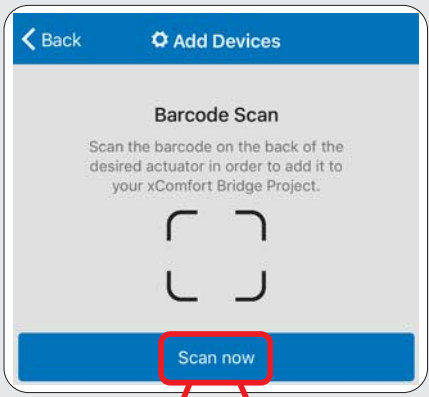
NL Start de app, selecteer uw xComfort Bridge en volg de instructies op. De xComfort Bridge moet zich in hetzelfde netwerk bevinden!

DE Starten Sie die App, wählen Sie Ihre xComfort Bridge aus und folgen Sie den Anweisungen. Die Bridge muss sich im selben Netzwerk befinden!

CZ Spusťte aplikaci, vyberte svůj xComfort Bridge a pustupujte podle pokynů. Bridge musí být ve stejné síti!"

5


Configure
Add Devices
Rooms
Devices
Scenes
My xComfort Bridge
Back
Add Devices
Select your desired method
Learning Mode
Add devices by pressing the "Mode"-Button on the devices.
Barcode Scan
Add a new Device by scanning its barcode with your smartphone.


Back
Add Devices
Barcode Scan
Scan the barcode on the back of the desired actuator in order to add it to your xComfort Bridge Project.
Scan now

a

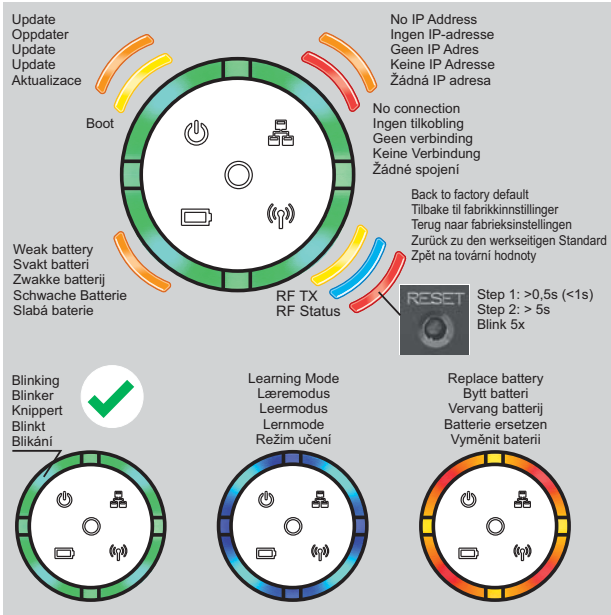
b

3x


CPAD-00/221
0-100W
www.eaton.com/xComfort
MRF Sn.:
MRF Sn.:
MRF Sn.:
Powering Business Worldwide

3x





Technical Data / Technische gegevens / Tekniske data / Technische Daten / Technická data

Power supply	230 VAC +10% -15%, 50Hz
Load	R,L,C: 0 - 100 W (0 - 100 VA); LED, ESL: 0 - 100 W (TYP)
Eaton Smart Dimming technology with overload protection	
Auto trailing / leading edge mode	6 DIM Profiles
Max RF power	25 mW (ERP)
Standby	Aktor: 210 mW (TYP) / Bridge: <0.5 W
Battery	CR2450N 3V (included)
Battery lifetime	10 years (TYP)
RF	868,3MHz (xComfort compatible)
Degree of protection	IP20
Actor	-5 to +55°C
Sensor	+5 to +45°C







Powering Business Worldwide

© 2019 by Eaton Industries (Austria) GmbH
Eugenia 1, 3943 Schrems, Austria
www.eaton.eu/documentation
All Rights Reserved, Printed in Austria