Datasheet

R885110

IP 67 housing for 1xRJ45 s/u

- High quality, impact resistant thermoplastic
- Dimensionally stable material
- Gasoline & oil resistant
- Temperature resistant
- UV - Resistant
- RJ45 Module Cat.6A EI s/u
- Snap-in coupling
- Degree of protection IP65/IP67 acc. IEC 60529




Mechanical data


Mechanical Data	Value	Standard
Latching	Snap-in coupling	
Degree of protection	IP65/67	IEC 60529
Connector interface	RJ45	IEC 60603-7 RJ45
Protective housing	Variant 06	IEC 61076-3-106
Colour	Military gray RAL 7042	
Ambient temperature (operation)	-10 °C ... 60 °C	

Technical Data		
Housing material	PBT	
Seal material	NBR	
Degree of protection	IP65/67	IEC 60529
In flammability class acc. To UL-94	V-0	

Drawing

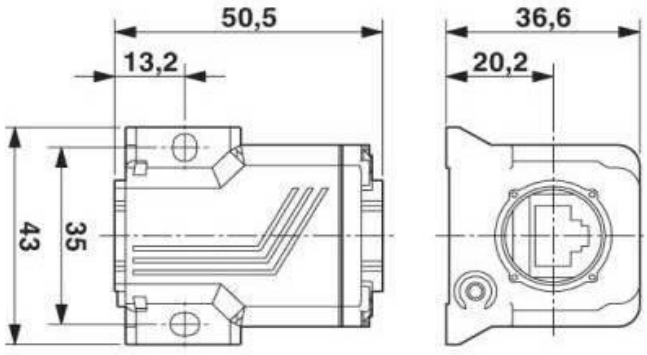

L = 13mm
H = 28mm
G= M20x1.5mm
Key width = 27mm
Cabel ø = 5 – 15 mm

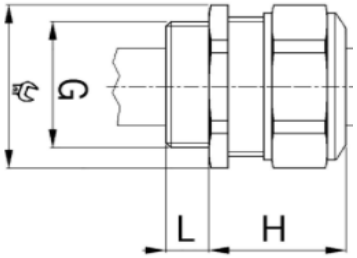

Januar 2022

Datasheet

R885110

IP 67 housing for 1xRJ45 s/u

Order information

Description	Part number	Packing unit	Min. order quantity
IP 67 housing for 1xRJ45 s/u	885110	1	1



Installations / Accessories

	Description	Part number	Packing unit	Min. order quantity
A)	Cat.6A ISO/s	509500	1	10
B)	Cat.6A ISO/u	803926	1	10
C)	Cat.6A EL/s	813504	1	10
D)	Cat.6A EL/u	813506	1	10
E)	Plug FM45 C6A s/u 22/26 A/B	814568	1	1
F)	Patch Cord CU IN 1xC6A S GN 2.5m	313637	1	1
G)	Patch Cord CU IN 2xC6A S GN 2.5m	313641	1	1
H)	Protection Cap FM45 IP67 T06f	309589	1	1




A



B



C



D



E



F



G



H

Januar 2022

Datasheet

R885110

IP 67 housing for 1xRJ45 s/u

Januar 2022