

Centex

Termostater



Application:

Thermostats are used for controlling fan units, heaters and heat exchangers, also can be used as a signal generator for monitoring the enclosure internal temperature.

Technical data:


Sensor element: thermal bimetal
 Temperature range: 0-60 °C, hysteresis ca. 7 °C
 Contact types: snap action contact
 Power carrying capacity: 6 A (1) 250 V AC
 Radio frequency interference: N (according to VDE 0875)

Supply includes:

- KTS 1141 or KTO 1140 thermostat
- DIN rail
- two holders
- two screw clamps

Type of thermostat	Colour of hand-wheel	Package	Catalogue number
KTS 1141 - normally open	blue	1 pc.	WN-0201-02-00-000
KTO 1140 - normally closed	red	1 pc.	WN-0201-01-00-000

Connection diagram:

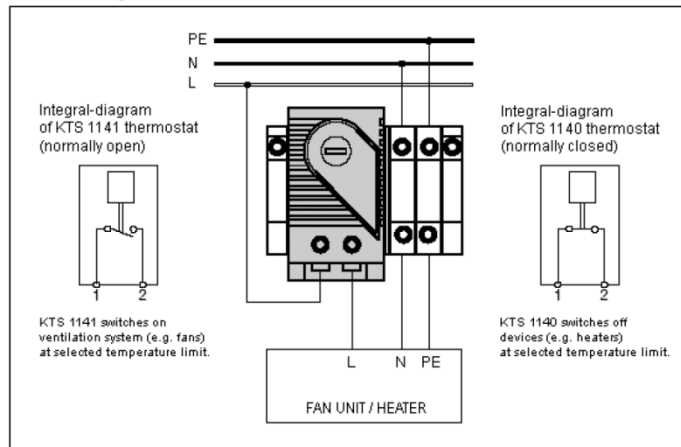

Molex art.nr	EI.nr	Fargekode	Beskrivelse
WN-0201-02-00-000	6909639	Blå	Termostat til vifte KTS-1141 (Normally open)
WN-0201-01-00-000		Rød	Termostat til varme KTO 1140 (normally closed)

Juli 2014