


SINGLE WALL MOUNT CABINET

WITH OPENABLE SIDE PANELS FROM OUTSIDE

Technical Features

Material	1-1, 5-2 mm steel
Color	RAL 7035 or RAL 9005
Maximum Static Load	Up to 80 kg.
Finish	Electrostatic Powder Paint

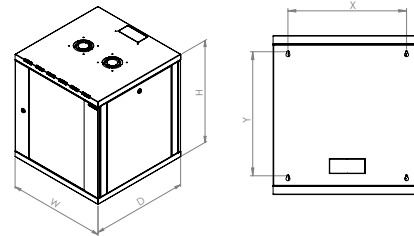

Standard Configuration

- Steel frame
- Glass door with cylindrical lock
- Openable side panels from outside
- 1 Pair of heavy duty 19" Mounting Rails
- RoHS compliant, UL Certificated
- Flat Pack option available

Option

- Adjustable feet or Castor Set (Solid front door)
- Available as floor standing cabinet as an option with castors or adjustable feet

Height (U)	Outer Width (W) mm	Outer Depth (D) mm	Outer Height (H) mm	Inner Width mm	Inner Depth mm	Inner Height mm	19" Rails Adjustable Depth Range (c)	X	Y	Weight (kg)	Part No
6U	600	400	376	500	358	268	105-240	480	233	15	WS3O-X-0664A
6U	600	560	376	500	518	268	105-400	480	233	18	WS3O-X-0665A
6U	600	600	376	500	568	268	105-440	480	233	20	WS3O-X-0666A
9U	600	400	498	500	358	410	105-240	480	368	19	WS3O-X-0964A
9U	600	560	498	500	518	410	105-400	480	368	22	WS3O-X-0965A
9U	600	600	498	500	568	410	105-440	480	368	24	WS3O-X-0966A
12U	600	400	631	500	358	543	105-240	480	501	23	WS3O-X-1264A
12U	600	560	631	500	518	543	105-400	480	501	26	WS3O-X-1265A
12U	600	600	631	500	568	543	105-440	480	501	28	WS3O-X-1266A
15U	600	400	765	500	358	675	105-240	480	635	27	WS3O-X-1564A
15U	600	560	765	500	518	675	105-400	480	635	30	WS3O-X-1565A
15U	600	600	765	500	568	675	105-440	480	635	32	WS3O-X-1566A
18U	600	400	898	500	358	809	105-240	480	768	31	WS3O-X-1864A
18U	600	560	898	500	518	809	105-400	480	768	34	WS3O-X-1865A
18U	600	600	898	500	568	809	105-440	480	768	36	WS3O-X-1866A
21U	600	400	1022	500	358	943	105-240	480	902	34	WS3O-X-2164A
21U	600	560	1022	500	518	943	105-400	480	902	38	WS3O-X-2165A
21U	600	600	1022	500	568	943	105-440	480	902	40	WS3O-X-2166A
24U	600	400	1177	500	358	1076	105-240	480	1035	36	WS3O-X-2464A
24U	600	560	1177	500	518	1076	105-400	480	1035	41	WS3O-X-2465A
24U	600	600	1177	500	568	1076	105-440	480	1035	43	WS3O-X-2466A

X (Color code): 7:RAL 7035 Light Grey, 9:RAL 9005 Black