DATASHEET - T0-3-8222/E



Changeoverswitches, Contacts: 6, 20 A, front plate: 1-2, 90 °, maintained, flush mounting





Part no. T0-3-8222/E Catalog No. 048339

EL-Nummer (Norway) 0001456274

Similar to illustration

Delivery program			
Product range			Control switches
Part group reference			ТО
Basic function			Changeoverswitches
			with black thumb grip and front plate
Contacts			6
Degree of Protection			Front IP65
Design			flush mounting
Contact sequence			- × × × × × × × × × × × × × × × × × × ×
Switching angle		0	90
Switching performance			maintained Without 0 (Off) position
Design number			8222
Front plate no.			1 2 FS 943
front plate			1-2
Motor rating AC-23A, 50 - 60 Hz			
400 V	Р	kW	5.5
Rated uninterrupted current	Iu	Α	20
Note on rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$			Rated uninterrupted current $\mathbf{I}_{\mathbf{U}}$ is specified for max. cross-section.
Number of contact units		contact unit(s)	3

Technical data

Genera

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open	•	°C	-25 - +50
Enclosed	•	°C	-25 - +40
Overvoltage category/pollution degree			III/3

Rated impulse withstand voltage	U _{imp}	V AC	6000
Mechanical shock resistance	Oimp		15
		g	
Mounting position Contacts			As required
Electrical characteristics			
Rated operational voltage	U _e	V AC	690
Rated uninterrupted current	Iu	A	20
Note on rated uninterrupted current !u	·u	,,	Rated uninterrupted current I_u is specified for max. cross-section.
Load rating with intermittent operation, class 12			nated difficent upled current i _U is specified for max. cross-section.
AB 25 % DF		v I	2
		x l _e	
AB 40 % DF		x l _e	1.6
AB 60 % DF		x I _e	1.3
Short-circuit rating			
Fuse		A gG/gL	
Rated short-time withstand current (1 s current)	I _{cw}	A _{rms}	320
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	6
Switching capacity		٨	120
cos φ rated making capacity as per IEC 60947-3		A	130
Rated breaking capacity cos φ to IEC 60947-3		A	100
230 V		A	100
400/415 V		A	110
500 V		A	80
690 V		Α	60
Safe isolation to EN 61140		V/ A C	440
between the contacts		V AC	440
Current heat loss per contact at l _e		W	0.6
Current heat loss per auxiliary circuit at I _e (AC-15/230 V)		CO	0.6
Lifespan, mechanical	Operations	x 10 ⁶	> 0.4
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	P	kW	3
230 V Star-delta	Р	kW	5.5
400 V 415 V	Р	kW	5.5
400 V Star-delta	Р	kW	7.5
500 V	Р	kW	5.5
500 V Star-delta	Р	kW	7.5
690 V	P	kW	4
690 V Star-delta	Р	kW	5.5
Rated operational current motor load switch			
230 V	l _e	Α	11.5
230 V star-delta	l _e	Α	20
400V 415 V	le	Α	11.5
400 V star-delta	l _e	Α	20
500 V	Ie	Α	9
500 V star-delta	I _e	Α	15.6
690 V	I _e	Α	4.9
690 V star-delta	I _e	Α	8.5
AC-21A			
Rated operational current switch			
440 V	I _e	Α	20
AC-23A	-		

Motor rating AC-23A, 50 - 60 Hz P AW 280 V P kW 3 400 V 415 V P kW 55 500 V P kW 7.5 880 V P kW 55 Rated operational current motor load switch 220 V I _e A 13.3 400 V 415 V I _e A 13.3 500 V I _e A 13.3 500 V I _e A 13.3 689 V I _e A 10.2 0C L Contacks switches LR = 1 ms Read operational current I _e A 10 Voltage per contact pair in series V 60 0 0 A 1 Cortacts I _e A 1 0 0 0 A 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
Main	
S00 V	
Rated operational current Figure	
Risted operational current motor load switch Incompany of the probability of the probab	
200 V 15 V 16 18 18 13 13 13 18 18 18	
400 V 415 V 10	
Biggraph	
DC DC-1, Load-break switches L/R = 1 ms Ie A 10 Rated operational current Ie A 10 Voltage per contact pair in series V 60 DC-21A Ie A 1 Rated operational current Ie A 1 Contacts Quantity 1 DC-23A, motor load switch L/R = 15 ms Use Contacts Use Contacts Image: Contacts Rated operational current Ie A 10 Contacts Quantity 1 Rated operational current Ie A 10 Contacts Quantity 2 80 V Quantity 2 Rated operational current Ie A 10 Contacts Quantity 3 20 V Quantity 3 Rated operational current Ie A 5 Contacts Quantity 3 240 V Contacts Quantity 5 DC-13, Control switches L/R = 50 m	
DC-1, Load-break switches L/R = 1 ms Rated operational current Io	
Rated operational current Voltage per contact pair in series DC-21A Rated operational current Contacts DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Contacts Rated operational current Le A 5 Contacts DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault Fault Fault Fault Fault Frobability Terminal capacities	
Voltage per contact pair in series	
DC-21A	
DC-21A	
Rated operational current	
Contacts DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current 48 V Rated operational current Contacts Rated operational current Contacts 60 V Rated operational current Contacts 1e A 10 Contacts 60 V Rated operational current Le A 10 Contacts Quantity 3 120 V Rated operational current Le A 5 Contacts Quantity A 5 Contacts Contacts Quantity Rated operational current Le A 5 Contacts Contacts Quantity A 5 Contacts Contacts Quantity A 5 Contacts Con	
DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current 48 V Rated operational current Le A 10 Contacts Rated operational current Le A 10 Contacts Quantity Rated operational current Le A 10 Contacts Quantity 2 60 V Rated operational current Le A 10 Contacts Quantity 3 120 V Rated operational current Le A 5 Contacts Quantity 3 240 V Rated operational current Le A 5 Contacts Quantity 5 Contacts Quantity 5 Contacts Quantity 3 240 V Rated operational current Le A 5 Contacts Quantity 5 Contacts Quantity 3 240 V Rated operational current Le A 5 Contacts Quantity 5 Contacts Contacts DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
Rated operational current Contacts Bov Rated operational current Contacts Rated operational current Contacts Le A 10 Contacts Quantity 2 Rated operational current Contacts Le A 5 Contacts Quantity 3 120 V Rated operational current Contacts Le A 5 Contacts Duantity 3 240 V Rated operational current Contacts DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability Ferminal capacities	
Rated operational current Contacts Quantity Rated operational current Ie A 10 Contacts Quantity Rated operational current Ie A 5 Contacts Quantity Fall Contacts Quantity Fall Contacts Quantity Fall Fall Fall Fall Fall Frobability Terminal capacities	
Contacts 48 V Rated operational current Contacts Quantity Rated operational current Ie A 10 Quantity Rated operational current Ie A 10 Contacts Quantity Rated operational current Ie A 5 Contacts Quantity Rated operational current Ie A 5 Contacts Quantity 3 Contacts Quantity Fault Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
A8 V Rated operational current Contacts 60 V Rated operational current Ie A 10 Quantity 2 60 V Rated operational current Ie A 5 Contacts Quantity 3 240 V Rated operational current Ie A 5 Contacts Quantity 5 DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
Rated operational current Contacts Guantity Rated operational current Ie A 10 Contacts Quantity 3 120 V Rated operational current Ie A 5 Contacts Quantity 3 240 V Rated operational current Ie A 5 Contacts Quantity 3 DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
Contacts Quantity 2 60 V Rated operational current Contacts Quantity 3 120 V Rated operational current Ie A 5 Contacts Quantity 3 240 V Rated operational current Ie A 5 Contacts Quantity 3 240 V Rated operational current Ie A 5 Contacts Quantity 5 Contacts Quantity 3 240 V Rated operational current Ie A 5 Contacts Quantity 5 Contacts Contacts Unumber Solution Solutio	
Rated operational current Contacts 120 V Rated operational current Rated operational current Contacts Quantity Rated operational current Contacts Quantity Rated operational current Le A 5 Quantity A 5 Quantity 5 DC-13, Control switches L/R = 50 ms Rated operational current Le A 10 Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability Fault probability Ferminal capacities	
Rated operational current Contacts Quantity Rated operational current Contacts Quantity Rated operational current Contacts Quantity Rated operational current Le A 5 Quantity Quantity DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
Contacts Quantity Rated operational current Ie A 5 Contacts Quantity 3 240 V Rated operational current Ie A 5 Contacts Quantity 5 DC-13, Control switches L/R = 50 ms Rated operational current Ie A 10 Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
Rated operational current Rated operational current Contacts Quantity Rated operational current Rated operational current Rated operational current Contacts DC-13, Control switches L/R = 50 ms Rated operational current Rated operational current Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Reminal capacities	
Rated operational current Contacts Quantity A 5 Contacts Quantity Rated operational current Ie A 5 Contacts Quantity 5 Contacts Quantity DC-13, Control switches L/R = 50 ms Rated operational current Ie A 10 Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
Contacts Quantity Rated operational current Rated operational current DC-13, Control switches L/R = 50 ms Rated operational current Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Terminal capacities	
240 V Rated operational current Contacts DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Terminal capacities Rated operational current V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability HF < 10 -5, < 1 fault in 100000 operations	
Rated operational current Contacts DC-13, Control switches L/R = 50 ms Rated operational current Ie A 5 Control switches L/R = 50 ms Rated operational current Ie A 10 Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability Fault probability Terminal capacities	
Contacts DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Terminal capacities Quantity 5 Quantity 5 V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability HF <-10 -5, < 1 fault in 100000 operations	
DC-13, Control switches L/R = 50 ms Rated operational current Voltage per contact pair in series Control circuit reliability at 24 V DC, 10 mA Fault probability Fault probability Terminal capacities	
Rated operational current Voltage per contact pair in series Fault probability Fault probability Terminal capacities	
Voltage per contact pair in series V 32 Control circuit reliability at 24 V DC, 10 mA Fault probability H _F < 10 ⁻⁵ , < 1 fault in 100000 operations Terminal capacities	
Control circuit reliability at 24 V DC, 10 mA Fault probability Fault H _F < 10 ⁻⁵ , < 1 fault in 100000 operations Terminal capacities	
Terminal capacities probability	
Terminal capacities	
2 x (1 - 2,5)	
Flexible with ferrules to DIN 46228 $$\text{mm}^2$$ 1 x (0.75 - 2.5) $2 \times (0.75 - 2.5)$	
Z X (0.75 - 2.5) Terminal screw M3.5	
Tightening torque for terminal screw Nm 1	
Technical safety parameters:	
Notes B10 _d values as per EN ISO 13849-1, table C1	
Rating data for approved types	
Contacts	
Rated operational voltage U _e V AC 600	
Rated uninterrupted current max.	
Main conducting paths	
General use A 16	
Auxiliary contacts	
General Use I _U A 10	
Pilot Duty A 600	

		P 600
Switching capacity		
Maximum motor rating		
Single-phase		
120 V AC	HP	0.5
200 V AC	HP	1
240 V AC	HP	1.5
Three-phase		
200 V AC	НР	3
240 V AC	НР	3
480 V AC	НР	7.5
600 V AC	НР	7.5
Short Circuit Current Rating	SCCR	
Basic Rating	kA	5
max. Fuse	Α	50
High fault rating	kA	10
max. Fuse	Α	20, Class J
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	18 - 14
Terminal screw		M3.5
Tightening torque	lb-in	8.8

Design verification as per IEC/EN 61439

2001gii 1011110441011 40 poi 120, 211 01 100			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	20
Heat dissipation per pole, current-dependent	P _{vid}	W	0.6
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Off-load switch (EC001105)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Changeover switch (ecl@ss10.0.1-27-37-14-05 [AKF062013])

Model			Reverser
Number of poles			3
With 0 (off) position			No
With retraction in 0-position			No
Rated permanent current lu	А		20
Rated operation current le at AC-3, 400 V	А		11.5
Rated operation power at AC-3, 400 V	kV	W	4
Degree of protection (IP), front side			IP65
Degree of protection (NEMA), front side			12
Number of auxiliary contacts as normally closed contact			0
Number of auxiliary contacts as normally open contact			0
Number of auxiliary contacts as change-over contact			0
Suitable for ground mounting			No
Suitable for front mounting 4-hole			Yes
Suitable for distribution board installation			No
Suitable for intermediate mounting			No
Complete device in housing			No
Material housing			Plastic
Type of control element			Toggle
Type of electrical connection of main circuit			Screw connection

Approvals

Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12
regree of Frotection	120. If 03, 04,00A Type 1, 12

Dimensions

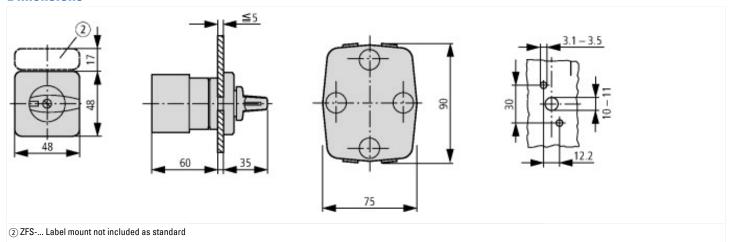

Assets (links)

Declaration of CE Conformity

00003075

Instruction Leaflets

IL03801020Z2018_05