### DATASHEET - TM-3-8222/EZ



Changeoverswitches, Contacts: 6, 10 A, front plate: 1-2, 60 °, maintained, centre mounting



Part no. TM-3-8222/EZ Catalog No. 045493

EL-Nummer (Norway) 0001456159

Similar to illustration

Delivery program			
Product range			Control switches
Part group reference			TM
Basic function			Changeoverswitches
			with black thumb grip and front plate
Contacts			6
Degree of Protection			Front IP65
Design			centre mounting
Contact sequence			
Switching angle		0	60
Switching performance			maintained Without 0 (Off) position
Design number			8222
Front plate no.			1 2 F 072
front plate			1-2
Motor rating AC-23A, 50 - 60 Hz			
400 V	Р	kW	3
Rated uninterrupted current	I <sub>u</sub>	Α	10
Note on rated uninterrupted current !u			Rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$ is specified for max. cross-section.
Number of contact units		contact unit(s)	3

## Technical data

C	6	n	6	ro	ı

General			
Standards			IEC/EN 60947, VDE 0660, CSA, UL Control switch as per IEC/EN 60947-5-1 Auxiliary switch as per IEC/EN 60947-5-1
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	$U_{imp}$	V AC	4000

Mounting position			As required
Contacts			
Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	500
Rated uninterrupted current	I <sub>u</sub>	Α	10
Note on rated uninterrupted current !u			Rated uninterrupted current $I_u$ is specified for max. cross-section.
Short-circuit rating			
Fuse		A gG/gL	10
Switching capacity		7.90/92	
Safe isolation to EN 61140			
Current heat loss per contact at I <sub>e</sub>		W	0.15
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		CO	0.15
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	>1
Maximum operating frequency	Operations/h		1200
AC			
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	Р	kW	
400 V 415 V	Р	kW	3
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	< 10 <sup>-5</sup> , < 1 fault in 100000 operations
Terminal capacities			
Solid or stranded		mm <sup>2</sup>	1 x 1,5 2 x 1,5
Flexible with ferrules to DIN 46228		mm <sup>2</sup>	1 x 1.0 2 x 1.0
Flexible		mm <sup>2</sup>	1 x 1.5 2 x 1.5
Terminal screw			M2.5
Tightening torque for terminal screw		Nm	0.4
Rating data for approved types			
Contacts			
Rated operational voltage	U <sub>e</sub>	V AC	300
Rated uninterrupted current max.			
Main conducting paths			
General use		Α	10
Auxiliary contacts			
General Use	lu	Α	10
Pilot Duty			A 300
Switching capacity			
Maximum motor rating			
Single-phase			
120 V AC		HP	0.33
240 V AC		HP	0.75
277 V AC		HP	0.75
Three-phase			
120 V AC		HP	0.75
240 V AC		HP	1
Terminal capacity			
Solid or flexible conductor with ferrule		AWG	14
Terminal screw			M2.5
Tightening torque		lb-in	3.5

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	10
Heat dissipation per pole, current-dependent	$P_{\text{vid}}$	W	0.15
Equipment heat dissipation, current-dependent	$P_{\text{vid}}$	W	0

Heat dissipation capacity  Operating ambient temperature min.  Operating ambient temperature max.  10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.3.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  10.9 Power-frequency electric strength  Pdiss  W  0  -2.5  50  Meets the product standard's requirements.  Meets the product standard's requirements.  Meets the product standard's requirements.  UV resistance only in connection with protective shield.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.	
Operating ambient temperature max.  10.2 Strength of materials and parts  10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3 I Verification of thermal stability of enclosures  10.2.3 Verification of resistance of insulating materials to normal heat  10.2.3 Verification of resistance of insulating materials to abnormal heat  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties	
IEC/EN 61439 design verification  10.2 Strength of materials and parts  10.2.2 Corrosion resistance  Meets the product standard's requirements.  10.2.3.1 Verification of thermal stability of enclosures  Meets the product standard's requirements.  UV resistance only in connection with protective shield.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire switchgear needs to be evaluated.  Some not apply, since the entire	
10.2 Strength of materials and parts  10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.2 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties	
10.2.2 Corrosion resistance  10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.2 Verification of resistance of insulating materials to normal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  Meets the product standard's requirements.  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  In the panel builder's responsibility.  Is the panel builder's responsibility.	
10.2.3.1 Verification of thermal stability of enclosures  10.2.3.2 Verification of resistance of insulating materials to normal heat  10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  In the panel builder's responsibility.  Is the panel builder's responsibility.	
10.2.3.2 Verification of resistance of insulating materials to normal heat 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact 10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances 10.5 Protection against electric shock 10.6 Incorporation of switching devices and components 10.7 Internal electrical circuits and connections 10.8 Connections for external conductors 10.9 Insulation properties  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Soes not apply, since the entire switchgear needs to be evaluated.  Internal electrical circuits and connections  Is the panel builder's responsibility.  10.9 Insulation properties	
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.  Is the panel builder's responsibility.	
and fire due to internal electric effects  10.2.4 Resistance to ultra-violet (UV) radiation  10.2.5 Lifting  Does not apply, since the entire switchgear needs to be evaluated.  10.2.6 Mechanical impact  Does not apply, since the entire switchgear needs to be evaluated.  10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.  10.8 Connections for external conductors  Is the panel builder's responsibility.	
10.2.5 Lifting  10.2.6 Mechanical impact  10.2.7 Inscriptions  10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.	
10.2.6 Mechanical impact  10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.  10.8 Connections for external conductors  Is the panel builder's responsibility.	
10.2.7 Inscriptions  Meets the product standard's requirements.  10.3 Degree of protection of ASSEMBLIES  Does not apply, since the entire switchgear needs to be evaluated.  Meets the product standard's requirements.  Meets the product standard's requirements.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  In apply, since the entire switchgear needs to be evaluated.  Does not apply, since the entire switchgear needs to be evaluated.  In apply, since the enti	
10.3 Degree of protection of ASSEMBLIES  10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.  10.8 Connections for external conductors  Is the panel builder's responsibility.	
10.4 Clearances and creepage distances  Meets the product standard's requirements.  10.5 Protection against electric shock  Does not apply, since the entire switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  Does not apply, since the entire switchgear needs to be evaluated.  10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.  10.8 Connections for external conductors  Is the panel builder's responsibility.	
10.5 Protection against electric shock  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  10.5 Protection against electric switchgear needs to be evaluated.  10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Us the panel builder's responsibility.  10.9 Insulation properties	
10.6 Incorporation of switching devices and components  10.7 Internal electrical circuits and connections  10.8 Connections for external conductors  10.9 Insulation properties  Does not apply, since the entire switchgear needs to be evaluated.  Is the panel builder's responsibility.  Is the panel builder's responsibility.	
10.7 Internal electrical circuits and connections  Is the panel builder's responsibility.  10.8 Connections for external conductors  Is the panel builder's responsibility.  10.9 Insulation properties	
10.8 Connections for external conductors  Is the panel builder's responsibility.  10.9 Insulation properties	
10.9 Insulation properties	
10.9.2 Power-frequency electric strength Is the panel builder's responsibility.	
10.9.3 Impulse withstand voltage	
10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility.	
10.10 Temperature rise  The panel builder is responsible for the temperature rise calculation. Eato provide heat dissipation data for the devices.	ı will
10.11 Short-circuit rating  Is the panel builder's responsibility. The specifications for the switchgear observed.	nust be
10.12 Electromagnetic compatibility  Is the panel builder's responsibility. The specifications for the switchgear observed.	nust be
10.13 Mechanical function  The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.	

### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Off-load switch (EC001105)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Changeover switch (ecl@ss10.0.1-27-37-14-05 [AKF062013])

Model		Reverser
Number of poles		3
With 0 (off) position		No
With retraction in 0-position		No
Rated permanent current lu	А	10
Rated operation current le at AC-3, 400 V	Α	0
Rated operation power at AC-3, 400 V	kW	3.3
Degree of protection (IP), front side		IP65
Degree of protection (NEMA), front side		Other
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Suitable for ground mounting		No
Suitable for front mounting 4-hole		Yes
Suitable for distribution board installation		No
Suitable for intermediate mounting		No
Complete device in housing		No
Material housing		Plastic
Type of control element		Toggle


#### **Approvals**

- Physical Control of the Control of	
Product Standards	UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	UL report applies to both US and Canada
North America Certification	UL listed, certified by UL for use in Canada
Degree of Protection	IEC: IP65; UL/CSA Type: –

#### **Dimensions**

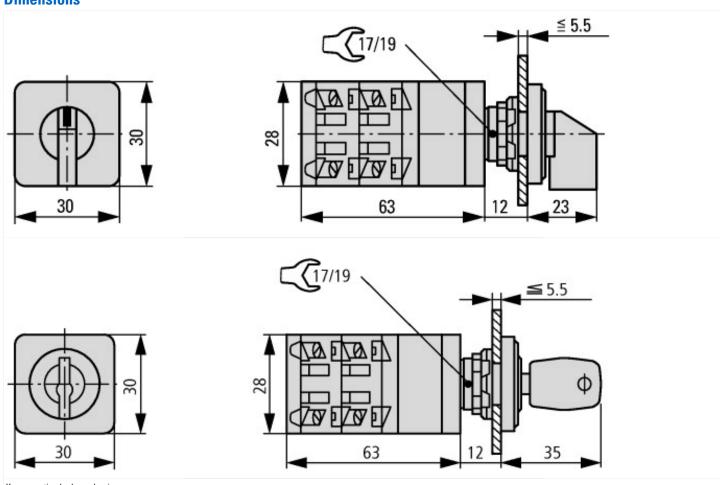

Key operation lock mechanism

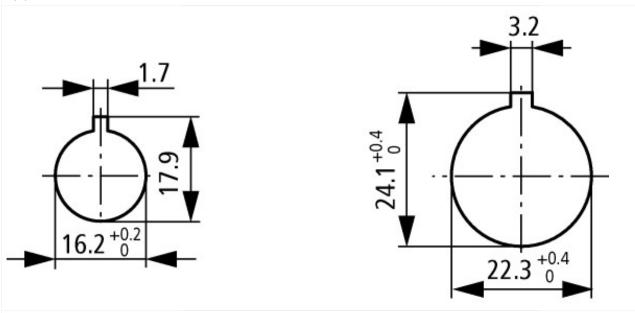

Door drilling dimensions Drilling dimensions: either 16.2 mm = without reduction  $\triangle$  RMQ16 or 22.3 mm = with reduction  $\triangle$  RMQ Titan

# Assets (links)

**Declaration of CE Conformity** 

00002932

**Instruction Leaflets** 

IL03801025Z2018\_04