# **DATASHEET - T5B-2-8211/E**



Changeoverswitches, Contacts: 4, 63 A, front plate: 1-0-2, 60 °, maintained, flush mounting

Powering Business Worldwide\*



Part no. Catalog No. T5B-2-8211/E 093094

EL-Nummer (Norway) 0001456929

Similar to illustration

Product range Per group reference Basic function Contacts Contacts Degree of Protection Contacts Conta	Delivery program			
Basic function  Contacts  Degree of Protection  Design  Contact sequence  A Contact sequence  Contact sequence  Contact sequence  Contact sequence  Contact sequence  A Contact sequence  A Contact sequence  Cont	Product range			Control switches
Contacts Degree of Protection Design  Contact sequence  Contact sequence  Contact sequence  Contact sequence  Switching angle Switching performance Design numbor Front plate no.  Front plate no.  Front plate no.  Contact sequence  * 60  * 60  * 100 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Part group reference			T5B
Contacts Degree of Protection Design  Contact sequence  Contact sequence  Contact sequence  Switching angle Switching performance Winh of (0ff) position  Design number Front plate no.  Front plate no.  Front plate  Motor rating AC-23A, 50 - 60 Hz  40 V P KW 30  Rated uninterrupted current I <sub>u</sub> Note on rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.  Number of contact unints  Number of contact unints  Contact  Front P65  flush mounting  flush mounting  #Front P65  flush mounting  #Front P65  flush mounting  #Front P65  flush mounting  #Front P65  ##Front P65  ##Fr	Basic function			Changeoverswitches
Design  Front IP65  flush mounting  Contact sequence  Contact sequence  Switching angle Switching performance  Switching performance  Design number  Front plate no.  Front plate  Motor rating AC-23A, 50 - 60 Hz  400 V P KW  Note on rated uninterrupted current I <sub>u</sub> Note on rated uninterrupted current I <sub>u</sub> Number of contact unins  Front P65  flush mounting  flush				with black thumb grip and front plate
Design  Contact sequence  Switching angle Switching angle Switching angle Switching performance Design number Front plate no.  FS 684  I-0-2  Motor rating AC-23A, 50 - 60 Hz  400 V P KW 30 Rated uninterrupted current I <sub>11</sub> is specified for max. cross-section.  Number of contact unints  Number of contact unints  Contact sequence  **  **  **  **  **  **  **  **  **	Contacts			4
Contact sequence  Switching angle  Switching performance  Design number Front plate no.  FS 684  1-0-2  Motor rating AC-23A, 50 - 60 Hz  400 V P KW 30  Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.  Number of contact units  Number of contact units  Contact 2	Degree of Protection			Front IP65
Switching angle  Switching performance  Design number  Front plate no.  Front plate  Motor rating AC-23A, 50 - 60 Hz  400 V P kW 30  Rated uninterrupted current lu  Note on rated uninterrupted current lu  Number of contact units  Number of contact units  F 60  maintained With 0 (Off) position  8211  FS 684  1-0-2  Rated uninterrupted current lu is specified for max. cross-section.	Design			flush mounting
Switching angle  Switching performance  Design number  Front plate no.  Front plate  Motor rating AC-23A, 50 - 60 Hz  400 V P kW 30  Rated uninterrupted current lu  Note on rated uninterrupted current lu  Number of contact units  Number of contact units  F 60  maintained With 0 (Off) position  8211  FS 684  1-0-2  Rated uninterrupted current lu is specified for max. cross-section.				
Switching performance  Design number  Front plate no.  ### Augustian State of Contact Units  ### Augustian State Of Contact Units  ### Augustian State Output Sta	Contact sequence			~ X X
With 0 (Off) position  Design number  Front plate no.  FS 684  Font plate  Motor rating AC-23A, 50 - 60 Hz  400 V  Rated uninterrupted current  Vu  Number of contact units  With 0 (Off) position  8211  FS 684  1-0-2  Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.  Value on rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.	Switching angle		0	60
Front plate no.  Front plate  FS 684  front plate  Motor rating AC-23A, 50 - 60 Hz  400 V  P  kW  30  Rated uninterrupted current  lu  A  63  Rated uninterrupted current lu  Number of contact units  contact  2	Switching performance			
FS 684  front plate  Motor rating AC-23A, 50 - 60 Hz  400 V P kW 30  Rated uninterrupted current  Iu A 63  Note on rated uninterrupted current Iu  Number of contact units  contact  2	Design number			8211
Motor rating AC-23A, 50 - 60 Hz  400 V  Rated uninterrupted current  Iu  A  63  Note on rated uninterrupted current Iu  Number of contact units  contact  2	Front plate no.			FS 684
Motor rating AC-23A, 50 - 60 Hz  400 V  Rated uninterrupted current  Iu  A  63  Note on rated uninterrupted current Iu  Number of contact units  contact  2	front plate			1-0-2
400 V Rated uninterrupted current Iu A 63 Note on rated uninterrupted current Iu is specified for max. cross-section.  Number of contact units contact units				
Rated uninterrupted current    Iu		P	kW	30
Note on rated uninterrupted current I <sub>u</sub> Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section.  Number of contact units contact 2	Rated uninterrupted current			
Number of contact units contact 2				
	Number of contact units		contact unit(s)	

### **Technical data**

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open	°(	С	-25 - +50
Enclosed	٥(	С	-25 - +40

Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Mechanical shock resistance	шр	g	15
Mounting position		9	As required
Contacts			
Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	I <sub>u</sub>	Α	63
Note on rated uninterrupted current !u			Rated uninterrupted current $I_u$ is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	80
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	A <sub>rms</sub>	1300
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	2
Switching capacity	ч		
$\cos \phi$ rated making capacity as per IEC 60947-3		Α	800
Rated breaking capacity cos φ to IEC 60947-3		Α	
230 V		Α	520
400/415 V		Α	600
500 V		Α	480
690 V		Α	340
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I <sub>e</sub>		W	4.5
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		CO	4.5
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.5
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	Р	kW	15
230 V Star-delta	Р	kW	18.5
400 V 415 V	P	kW	22
400 V Star-delta	P	kW	30
500 V	Р	kW	22
500 V Star-delta	P	kW	37
690 V	P	kW	15
690 V Star-delta	P	kW	22
Rated operational current motor load switch			
230 V	l <sub>e</sub>	Α	51
230 V star-delta	le	Α	63
400V 415 V	I <sub>e</sub>	Α	41
400 V star-delta	I <sub>e</sub>	Α	63
500 V	l <sub>e</sub>	Α	33
500 V star-delta	I <sub>e</sub>	Α	57.2
690 V	l <sub>e</sub>	Α	17
690 V star-delta	l <sub>e</sub>	Α	29.4
AC-21A	Ü		
Rated operational current switch			
440 V	I <sub>e</sub>	Α	63

AC 22A			
AC-23A	Р	LAAZ	
Motor rating AC-23A, 50 - 60 Hz	P	kW	10.5
230 V	P	kW	18.5
400 V 415 V		kW	30
500 V	Р	kW	22
690 V	Р	kW	22
Rated operational current motor load switch			
230 V	l <sub>e</sub>	Α	63
400 V 415 V	l <sub>e</sub>	Α	63
500 V	l <sub>e</sub>	Α	33
690 V	I <sub>e</sub>	Α	23.8
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I <sub>e</sub>	Α	63
Voltage per contact pair in series		V	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I <sub>e</sub>	Α	50
Contacts		Quantity	1
48 V			
Rated operational current	I <sub>e</sub>	Α	50
Contacts		Quantity	2
60 V			
Rated operational current	I <sub>e</sub>	Α	50
Contacts		Quantity	3
120 V		,	
Rated operational current	I <sub>e</sub>	Α	25
Contacts	-	Quantity	3
240 V		,	
Rated operational current	I <sub>e</sub>	A	20
Contacts	· ·	Quantity	
DC-13, Control switches L/R = 50 ms		- Luumary	
Rated operational current	I <sub>e</sub>	A	25
Voltage per contact pair in series	6	V	24
Control circuit reliability at 24 V DC, 10 mA	Fault	H <sub>F</sub>	
Control circuit renability at 24 V DG, 10 IIIA	probability	''F	< 10 <sup>-5</sup> , < 1 fault in 100000 operations
Terminal capacities			
Solid or stranded		$mm^2$	1 x (2,5 - 35) 2 x (2,5 - 16)
Flexible with ferrules to DIN 46228		mm <sup>2</sup>	1 x (1 - 25)
10.000		mm	2 x (1.5 - 10)
Terminal screw			M6
Tightening torque for terminal screw		Nm	4
Technical safety parameters:			
Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			
Contacts  Petrol engrational voltage		V AC	600
Rated operational voltage	U <sub>e</sub>	V AC	600
Rated uninterrupted current max.			
Main conducting paths			
General use		Α	63
Switching capacity			
Maximum motor rating			
Single-phase			
120 V AC		НР	3
200 V AC		HP	7.5

240 V AC	HP	10
Three-phase		
200 V AC	HP	15
240 V AC	HP	15
480 V AC	HP	40
600 V AC	HP	40
Short Circuit Current Rating	SCCR	
High fault rating	kA	10
max. Fuse	А	100, Class J
Terminal capacity		
Solid or flexible conductor with ferrule	AWG	12 - 4
Terminal screw		M6
Tightening torque	lb-in	35.4

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	63
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	4.5
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
EC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			UV resistance only in connection with protective shield.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must observed. $\label{eq:constraint}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must lobserved.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Off-load switch (EC001105)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Changeover switch (ecl@ss10.0.1-27-37-14-05 [AKF062013])

	Reverser
	2
	Yes
	No
Α	63
А	41
kW	22
	IP65
	12
	0
	0
	0
	No
	Yes
	No
	No
	No
	Plastic
	Toggle
	Screw connection
	А

## **Approvals**

Product Standards	UL 60947-4-1;CSA - C22.2 No. 60947-4-1-14; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP65; UL/CSA Type 1, 12

### **Dimensions**

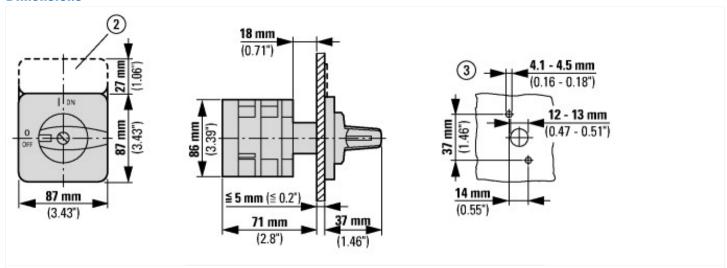

② ZFS-... Label mount not included as standard ③ Drilling dimensions door Cam switches T5B and T5 are same size, only their contacts are different

#### **Assets (links)**

**Declaration of CE Conformity** 

00003073

**Instruction Leaflets** 

IL03801009Z2018\_05