### DATASHEET - FAZ-B50/2

Miniature circuit breaker (MCB), 50A, 2p, B-Char, AC





Part no.FAZ-B50/2Catalog No.278739Eaton Catalog No.FAZ-B50/2EL-Nummer0001695118(Norway)

Similar to illustration

#### **Technical data**

| Electrical                                      |                 |                 |   |
|---|-----------------|-----------------|---|
| Standards                                       |                 |                 | IEC/EN 60947-2<br>IEC/EN 60898          |
| Rated operational voltage                       | U <sub>e</sub>  | V               |   |
|   | U <sub>e</sub>  | V AC            | 240/415                                 |
|   |                 | V DC            | 60 (per pole)                           |
| Rated voltage according to UL                   | Un              | V AC            | 480Y/277                                |
| Rated switching capacity acc. to IEC/EN 60947-2 | I <sub>cu</sub> | kA              | 15                                      |
| Breaking capacity according to UL               |                 | kA              | 5 (UL1077)                              |
| Operational switching capacity                  |                 | kA              | 7.5                                     |
| Characteristic                                  |                 |                 | B, C, D, K, S, Z                        |
| Max. back-up fuse                               |                 | A gL/gG         | 125                                     |
| Selectivity Class                               |                 |                 | 3                                       |
| lifespan  |                 |                 |   |
| Lifespan  | Operations      |                 | > 10000                                 |
| Direction of incoming supply                    |                 |                 | as required                             |
| Mechanical                                      |                 |                 |   |
| Standard front dimension                        |                 | mm              | 45                                      |
| Enclosure height                                |                 | mm              | 80                                      |
| Mounting width per pole                         |                 | mm              | 17.5                                    |
| Mounting  |                 |                 | IEC/EN 60715 top-hat rail               |
| Degree of Protection                            |                 |                 | IP20, IP40 (when fitted)                |
| Terminals top and bottom                        |                 |                 | Twin-purpose terminals                  |
| Terminal protection                             |                 |                 | Finger and back-of-hand proof to BGV A2 |
| Terminal capacities                             |                 | mm <sup>2</sup> |   |
|   |                 | mm <sup>2</sup> | 1 x 25                                  |
|   |                 | mm <sup>2</sup> | 2 x 10                                  |
|   |                 |                 |   |
| Thickness of busbar material                    |                 | mm              | 0.8 2                                   |
| Mounting position                               |                 |                 | As required                             |

# Design verification as per IEC/EN 61439

| Technical data for design verification                   |                   |    |   |
|--|-------------------|----|---|
| Rated operational current for specified heat dissipation | In                | А  | 50  |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub>  | W  | 0   |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub>  | W  | 9.9   |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>   | W  | 0   |
| Heat dissipation capacity                                | P <sub>diss</sub> | W  | 0   |
| Operating ambient temperature min.                       |                   | °C | -40   |
| Operating ambient temperature max.                       |                   | °C | 75  |
|  |                   |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |
| IEC/EN 61439 design verification                         |                   |    |   |
| 10.2 Strength of materials and parts                     |                   |    |   |
| 10.2.2 Corrosion resistance                              |                   |    | Meets the product standard's requirements.                                  |

| 10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction  |  |  |
|--|--|--|
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects   Meets the product standard's requirements.     10.2.4 Resistance to ultra-violet (UV) radiation   Meets the product standard's requirements.     10.2.5 Lifting   Does not apply, since the entire switchgear needs to be evaluated.     10.2.6 Mechanical impact   Does not apply, since the entire switchgear needs to be evaluated.     10.3.0 Begree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Does not apply, since the entire switchgear needs to be evaluated.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.9 Instruction advicting devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.9 Instruction for external conductors   Is the panel builder's responsibility.     10.9 Instruction properties   Is the panel builder's responsibility.     10.9.1 Store requery electric strength   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.1 Store-circuit rating   Is the panel builder's responsibility. <td>10.2.3.1 Verification of thermal stability of enclosures</td> <td>Meets the product standard's requirements.</td>              | 10.2.3.1 Verification of thermal stability of enclosures                   | Meets the product standard's requirements.   |
| and fire due to internal electric effects   Meta to internal electric effects     102.4 Resistance to ultra-violet (UV) radiation   Meta the product standard's requirements.     102.5 Lifting   Does not apply, since the entire switchgear needs to be evaluated.     102.6 Mechanical impact   Does not apply, since the entire switchgear needs to be evaluated.     103.7 Inscriptions   Metas the product standard's requirements.     104.4 Clearances and creepage distances   Metas the product standard's requirements.     105.5 Protection against electric shock   Metas the product standard's requirements.     105.1 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     105.1 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     105.2 Power-frequency electric strength   Does not apply, since the entire switchgear needs to be evaluated.     108.2 Power-frequency electric strength   Ste panel builder's responsibility.     109.3 Inpulse withstand voltage   Is the panel builder's responsibility.     10.0 Temperature rise   Is the panel builder's responsibility.     10.1 Mont-circuit rating   Is the panel builder's responsibility.     10.1 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed. <td>10.2.3.2 Verification of resistance of insulating materials to normal heat</td> <td>Meets the product standard's requirements.</td>                                      | 10.2.3.2 Verification of resistance of insulating materials to normal heat | Meets the product standard's requirements.   |
| 10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.2.5 LiftingDoes not apply, since the entire switchgear needs to be evaluated.10.3.0 Egree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesDoes not apply, since the entire switchgear needs to be evaluated.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Nover-frequency electric strengthIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Inpulse withstand voltageIs the panel builder's responsibility.10.9.1 Temperature riseIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical |  | Meets the product standard's requirements.   |
| 10.2.6 Mechanical impact   Does not apply, since the entire switchgear needs to be evaluated.     10.2.7 Inscriptions   Meets the product standard's requirements.     10.3 Degree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9.1 neurol electric strength   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   Is the op   | 10.2.4 Resistance to ultra-violet (UV) radiation                           | Meets the product standard's requirements.   |
| 10.2.7 Inscriptions   Meets the product standard's requirements.     10.3 Degree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the   | 10.2.5 Lifting   | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.3 Degree of protection of ASSEMBLIES   Does not apply, since the entire switchgear needs to be evaluated.     10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction  | 10.2.6 Mechanical impact   | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.4 Clearances and creepage distances   Meets the product standard's requirements.     10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.1 Rupuse withstand voltage   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.1 Temperature rise   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction  | 10.2.7 Inscriptions  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   Does not apply, since the entire switchgear needs to be evaluated.     10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction  | 10.3 Degree of protection of ASSEMBLIES                                    | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.6 Incorporation of switching devices and components   Does not apply, since the entire switchgear needs to be evaluated.     10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.1 Supulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction  | 10.4 Clearances and creepage distances                                     | Meets the product standard's requirements.   |
| 10.7 Internal electrical circuits and connections   Is the panel builder's responsibility.     10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction  | 10.5 Protection against electric shock                                     | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.8 Connections for external conductors   Is the panel builder's responsibility.     10.9 Insulation properties   Is the panel builder's responsibility.     10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction   | 10.6 Incorporation of switching devices and components                     | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.9 Insulation propertiesInsulation properties10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder is responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.13 Mechanical functionThe device meets the requirements, provided the information in the instruction   | 10.7 Internal electrical circuits and connections                          | Is the panel builder's responsibility.   |
| 10.9.2 Power-frequency electric strength   Is the panel builder's responsibility.     10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibility.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction   | 10.8 Connections for external conductors                                   | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   Is the panel builder's responsibility.     10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction   | 10.9 Insulation properties   |  |
| 10.9.4 Testing of enclosures made of insulating material   Is the panel builder's responsibility.     10.10 Temperature rise   Is the panel builder's responsibile for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction  | 10.9.2 Power-frequency electric strength                                   | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.     10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction   | 10.9.3 Impulse withstand voltage   | Is the panel builder's responsibility.   |
| 10.11 Short-circuit rating   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provide the information in the instruction   | 10.9.4 Testing of enclosures made of insulating material                   | Is the panel builder's responsibility.   |
| 10.12 Electromagnetic compatibility   Is the panel builder's responsibility. The specifications for the switchgear must be observed.     10.13 Mechanical function   The device meets the requirements, provided the information in the instruction  | 10.10 Temperature rise   |  |
| 10.13 Mechanical function The device meets the requirements, provided the information in the instruction   | 10.11 Short-circuit rating   | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
|  | 10.12 Electromagnetic compatibility  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| leafiet (IL) is observed.  | 10.13 Mechanical function  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

### **Technical data ETIM 7.0**

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ecl@ss10.0.1-27-14-19-01 [AAB905014])


| (ecl@ss10.0.1-27-14-19-01 [AAB905014])                         |     |          |
|--|-----|----------|
| Release characteristic   |     | В        |
| Number of poles (total)  |     | 2        |
| Number of protected poles                                      |     | 2        |
| Rated current  | А   | 50       |
| Rated voltage  | V   | 400      |
| Rated insulation voltage Ui                                    | V   | 440      |
| Rated impulse withstand voltage Uimp                           | kV  | 4        |
| Rated short-circuit breaking capacity Icn EN 60898 at 230 V    | kA  | 10       |
| Rated short-circuit breaking capacity Icn EN 60898 at 400 V    | kA  | 10       |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V | kA  | 15       |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V | kA  | 15       |
| Voltage type   |     | AC       |
| Frequency  | Hz  | 50 - 60  |
| Current limiting class   |     | 3        |
| Suitable for flush-mounted installation                        |     | No       |
| Concurrently switching N-neutral                               |     | No       |
| Over voltage category  |     | 3        |
| Pollution degree   |     | 2        |
| Additional equipment possible                                  |     | Yes      |
| Width in number of modular spacings                            |     | 2        |
| Built-in depth   | mm  | 70.5     |
| Degree of protection (IP)                                      |     | IP20     |
| Ambient temperature during operating                           | °C  | -25 - 75 |
| Connectable conductor cross section multi-wired                | mm² | 1 - 25   |
| Connectable conductor cross section solid-core                 | mm² | 1 - 25   |
|  |     |          |

#### **Approvals**

| Product Standards                | IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking |
|----------------------------------|--|
| UL File No.                      | E177451  |
| UL Category Control No.          | QVNU2, QVNU8   |
| CSA File No.                     | 204453   |
| CSA Class No.                    | 3215-30  |
| North America Certification      | UL recognized, CSA certified   |
| Conditions of Acceptability      | Supplementary Protector only   |
| Suitable for                     | Branch Circuits; not as BCPD   |
| Current Limiting Circuit-Breaker | No   |
| Max. Voltage Rating              | 480Y/277 VAC; 96 VDC   |
| Degree of Protection             | IEC: IP20; UL/CSA Type: -  |
|                                  |  |


## **Characteristics**

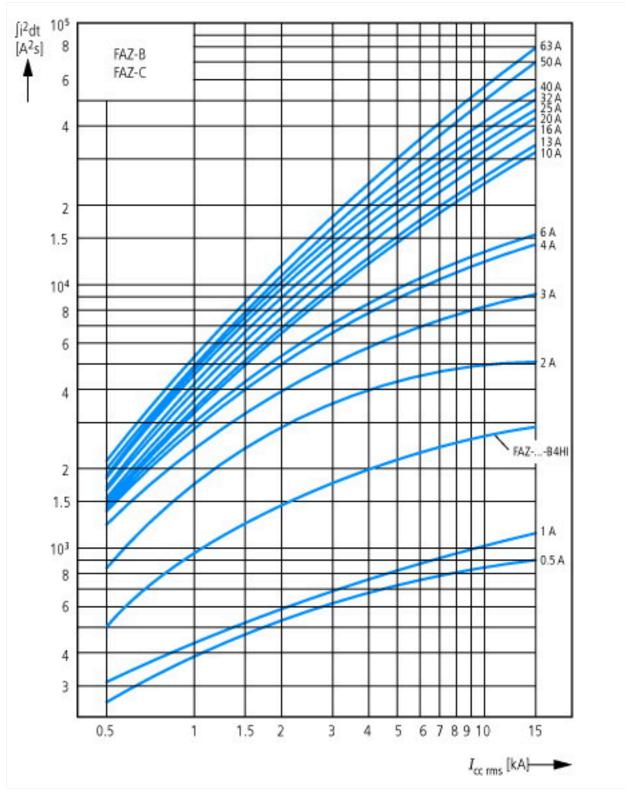

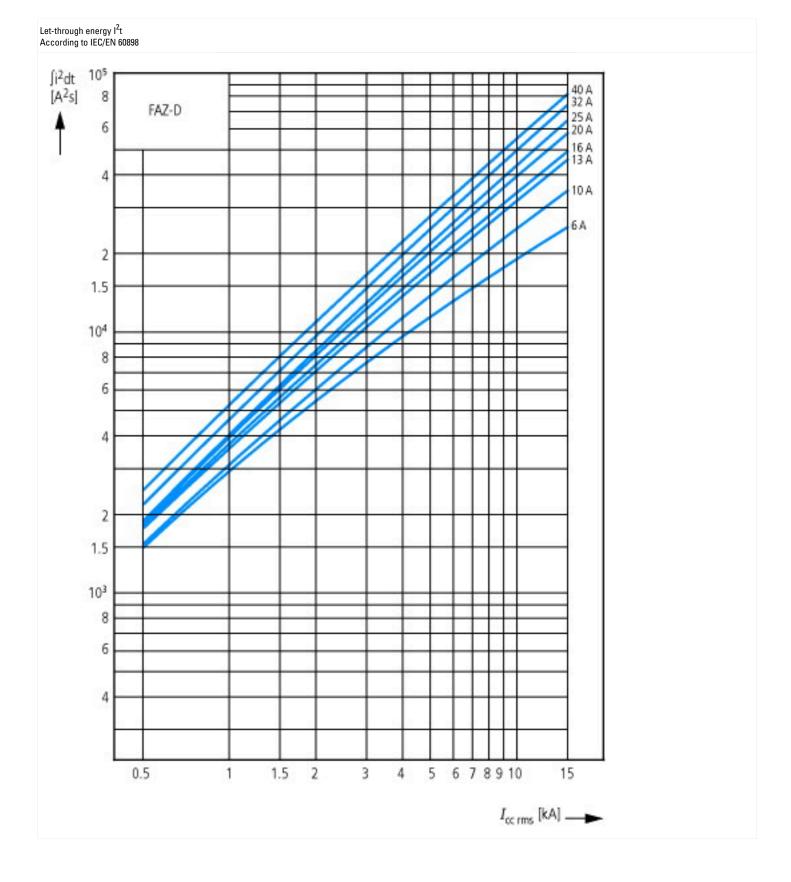





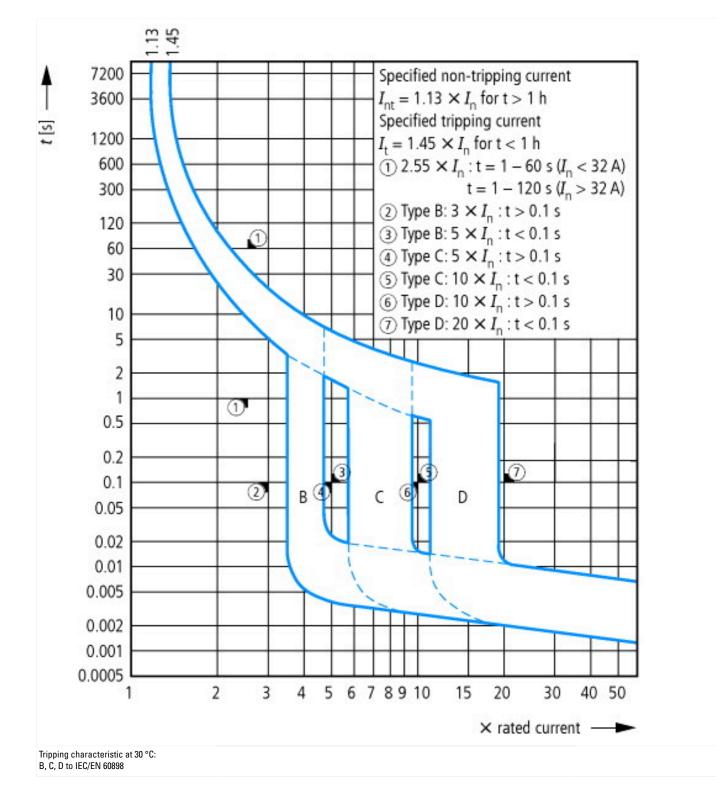

# Dimensions

