



EN: INSTRUCTION MANUAL
NO: MONTERINGSVEILEDNING
SE: INSTALLATIONSGUIDE

LUZENSE®




SWITCH ECO PANEL

Max 40V 1000mA IP44/IP20

EN: MEASUREMENT

NO: MÅL

SE: MÅTT

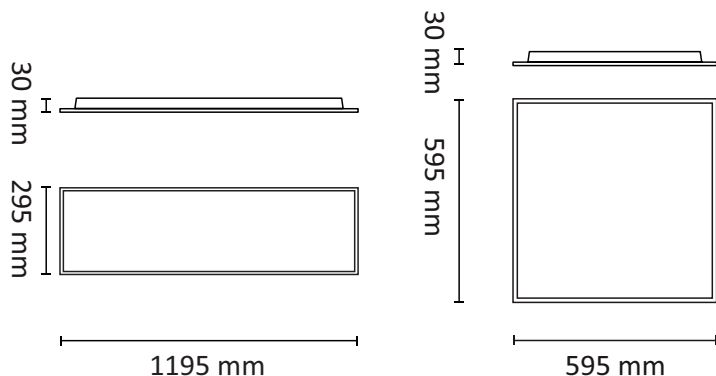

EN: This product contains a light source of energy efficiency class E

NO: Dette produktet inneholder en LED-lyskilde med energieffektivitets-klasse E

SE: Denna produkt innehåller en ljuskälla med energieffektivitetsklassen E



EN: Unreplaceable light source.


Replaceable control gear by qualified electrician.

NO: Ikke utskiftbar lyskilde.

Forkobling kan byttes av autorisert el.installatør.

SE: Ej utbytbar ljuskälla.

Drivdon kan bytas av auktoriserad elektriker.



EN: Installation must be performed by a professional.

NO: Må installeres av autorisert el-installatør.

SE: Måste installeras av en behörig elektriker.



EN: Minimum distance to flammable material in the beam direction.

NO: Minimumsavstand til brennbart materiale i armaturens stråleretning.


SE: Minsta avstånd mellan brännbart material och lampans ljusrättning.

A

EN: ASSEMBLY: SUSPENDED CEILING MOUNT

NO: MONTERING: I TAKHIMLING

SE: MONTERING: I TAKPLATTOR

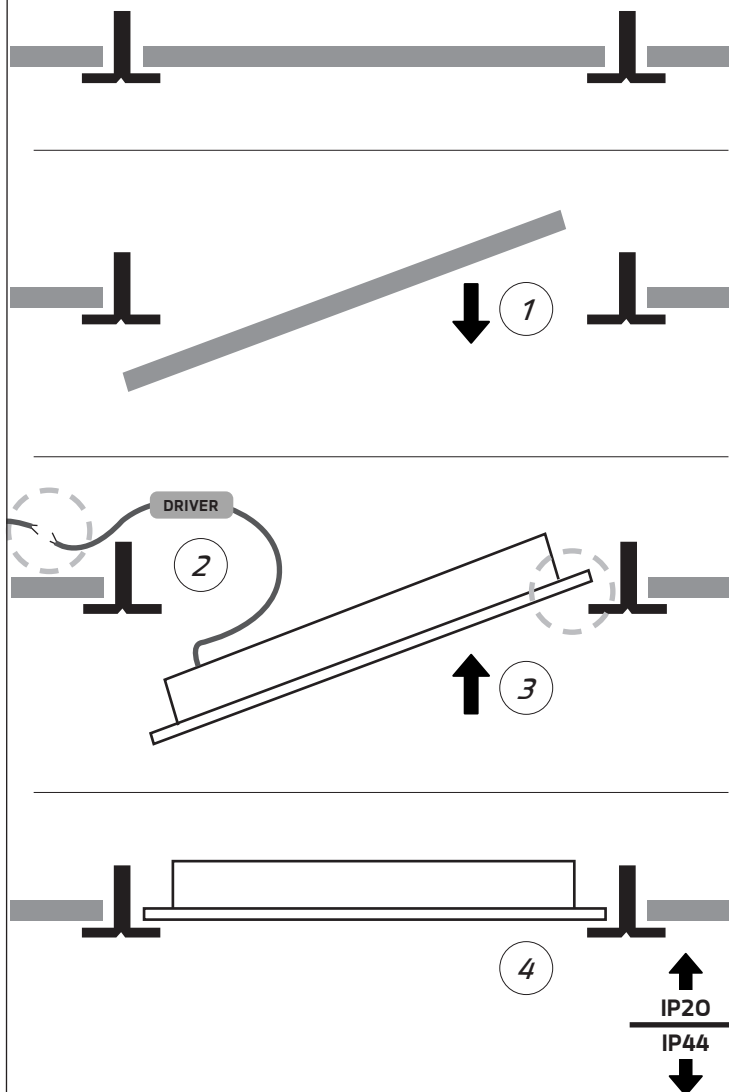

B

EN: ASSEMBLY: SURFACE MOUNTED BOX


NO: MONTERING: UTENPÅLIGGENDE BOKS


SE: MONTERING: UTANPÅLIGGANDE LÅDA

To be orders separately

Bestilles separat

Beställas separat

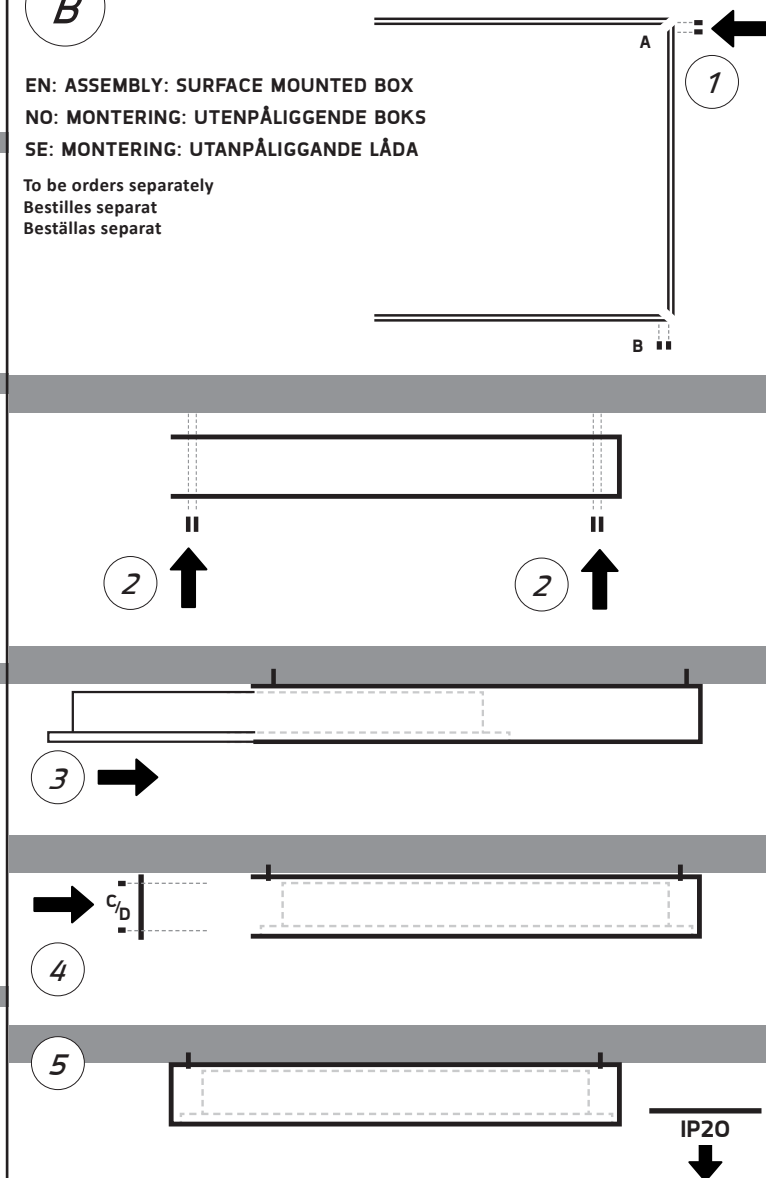

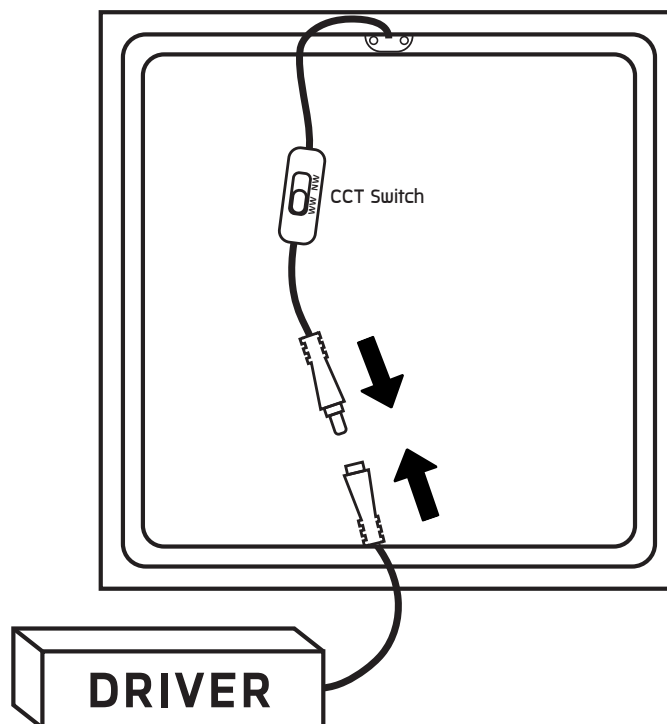

EN: COMPATIBLE LED DRIVERS IN THE SWITCH® SERIES:

NO: KOMPATIBLE LED-DRIVERE I SWITCH® SERIEN:

SE: KOMPATIBLA LED-DRIVDON I SWITCH® SERIEN:

NORWAY	SWEDEN	ON/OFF - LP2= CABLE & PLUG LCT = CONNECTION BOX WITH LINECT®
66 073 01	79 824 95	Switch® LED driver for 1000mA [700/800/900] LP2
66 073 03	79 824 97	Switch® LED driver for 1000mA [700/800/900] Linect
NORWAY	SWEDEN	TRIAC DIMMABLE - LP2= CABLE & PLUG LCT = CONNECTION BOX WITH LINECT®
66 073 22	79 825 08	Switch® Dimbar LED driver 50W 950mA LP2
66 073 23	79 825 09	Switch® Dimbar LED driver 50W 950mA Linect
NORWAY	SWEDEN	DALI DIMMABLE - LCT = CONNECTION BOX WITH LINECT®
66 073 44	79 825 19	Switch® DALI driver 40W 1000mA [700-1050mA] Linect 5 pol
NORWAY	SWEDEN	ON/OFF SENSOR [MW] - LP2= CABLE & PLUG LCT = CONNECTION BOX WITH LINECT®
66 073 60	79 825 31	Switch® Sensordriver 1000mA LP2
66 073 60	79 825 32	Switch® Sensordriver 1000mA Linect 3p

LUMINAIRE	LUMENS	MA SETTING	WATTAGE
SWITCH ECO LED PANEL	4800lm	1000mA	39W
SWITCH ECO LED PANEL	4300lm	900mA	36W
SWITCH ECO LED PANEL	3800lm	800mA	32W
SWITCH ECO LED PANEL	3350lm	700mA	28W