



Universal Busbar Support with Neutral Circuit – UBS2-10TN (551070)




- Universal fixing system
- Installs quickly and easily
- Extremely robust construction
- Adjustable arms for easy mounting
- Halogen free insulators

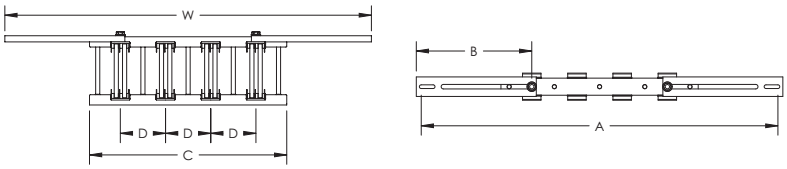

Part Number	UBS2-10TN
Article Number	551070
Material	Steel Glass Fibre Reinforced Polyamide
Max Working Voltage, IEC (Ui)	1,000 VAC 1,500 VDC
Working Temperature	-40 to 130 °C
Complies With	IEC® 60439.1 IEC® 61439.1 IEC® 60695-2-11 (Glow Wire Test 960 °C)
Flammability Rating	UL® 94V-0
Typical Application Current Rating	3,600 A
Busbars per Phase	1 – 2
Busbar Width	30 – 120 mm
Busbar Thickness	10 mm
Width (W)	585 – 895 mm
A	560 – 865 mm
B	281 mm
C	480 mm
D	110 mm
Unit Weight	2.86 kg
Certifications	Bureau Veritas 41941 BV CE EAC 8546901000 (Russian Federation) IEC 61439-1 Busbar Supports RoHS

Part Number	UBS2-10TN
Standard Packaging Quantity	1 pc
UPC	78285687615
EAN-13	3479775510705

IEC is a registered trademark of the International Electrotechnical Commission. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING
nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent 's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2018 nVent All rights reserved
nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.
All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.