


Eaton STS 16 & ATS 30

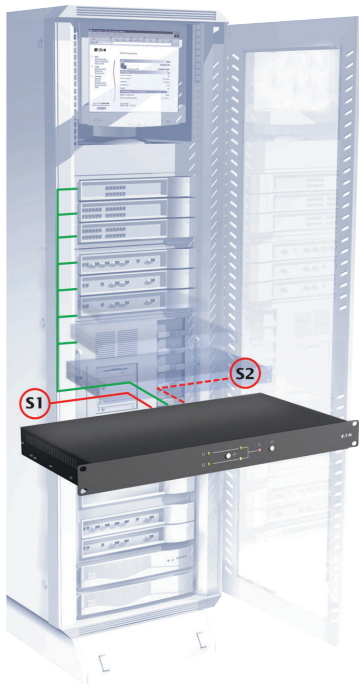

Eaton STS

Power Source Transfer Switch

Seamless power transfer

Eaton STS 16 and ATS 30 are designed to provide power supply redundancy for single connection equipment. With STS and ATS power from two independent sources can be supplied to IT equipment, which have only one input power supply.

Redundancy

Only advanced servers are equipped with a dual electrical power supply. The majority of network devices and entry-level servers have a single connection with only one electrical power input. With the Eaton STS & ATS, critical equipment can be connected to a redundant power supply.

Both sources (primary and secondary) are connected in a straightforward manner to the ATS/STS in the base of the rack. The Eaton ATS/STS then controls the redundancy of this electrical power supply. If the primary source fails, transfer to the secondary source is automatic and instantaneous.

Simple and cost-effective

Considering the advanced design of the Eaton STS & ATS, these are highly competitive in price compared with the 'dual power supply' options available from suppliers of networking equipment.

1U high, the unit can be installed easily within the rack. LEDs indicate the status of the sources and the Eaton ATS/STS.

Network connectivity

The ATS 30 provides network connectivity as standard. This allows users to access, configure and manage units from remote locations.



Powering Business Worldwide

Eaton STS 16 & ATS 30

- 1 User interface
- Source selection
- Source status
- STS status



STS 16, front view

- 2 Input Circuit breakers
3 Input connections
(2 x IEC C20)
4 Outputs
(6 x IEC C13
+ 1 x IEC C19)



STS 16, rear view

- 1 User interface
- Source status
- STS status

- 2 Hardwired inputs
and output
3 Network connection
and web interface



ATS 30

| TECHNICAL SPECIFICATIONS | STS 16 | ATS 30 |
|--|--|--------------------------|
| Nominal current | 16 A | 30 A* |
| Input/output | | |
| Nominal voltage/input frequency | 208/220/230/240 V ; 50/60 Hz | 220/230/240 V ; 50/60 Hz |
| Output protection | 2 circuit breakers (1 per IEC 10 A group) | |
| Performance | | |
| Typical transfer time | 8 ms | |
| Safety | IEC/EN 60950-1 | |
| EMC | IEC/EN 62310-2 | |
| Marking | CE, UL | CE |
| Connection | | |
| Inputs | 2 connecting cables with IEC C20 connector (16 A male connector) | Hardwired |
| Outputs | 2 sets of 3 IEC C13 connectors - 1 set of 1 IEC C19 connector | Hardwired |
| Dimensions and weight | | |
| Dimensions H x W x D | 43 x 430 x 250 mm | 43 x 440 x 390 |
| Weight | 6 kg | 5 kg |
| Customer Service & Support | | |
| 2 years guarantee | Standard exchange of the product | |
| Communication and user interface | | |
| User interface | Displays the various status of the sources and the Eaton STS/ATS | |
| Network communication | No | Yes |
| * 30A up to 35°C, 25.6A up to 40°C. | | |
| Part Numbers | | |
| STS/ATS | 66 028 | EATS30N |
| Set of two 16 A connecting cables IEC female connector / USE-DIN male connector length 1.5 m | 66 397 | |
| 1 cable / IEC 10 A male to IEC 16 A female | 66 029 | |

In the interests of continuous product improvement all specifications are subject to change without notice.